


RADIATED EMISSION

Model Name : LDA150W-30
 Model No. :
 Serial No. :
 Points : 3
 Detector : PEAK/QP
 Polarization : Hori.&Vert.
 Limit: [CISPR 22] Class B<3m>

Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Humi. : 44%
 Date : 2001/9/18
 Test Equip. : R3132,ESPC
 Comment :

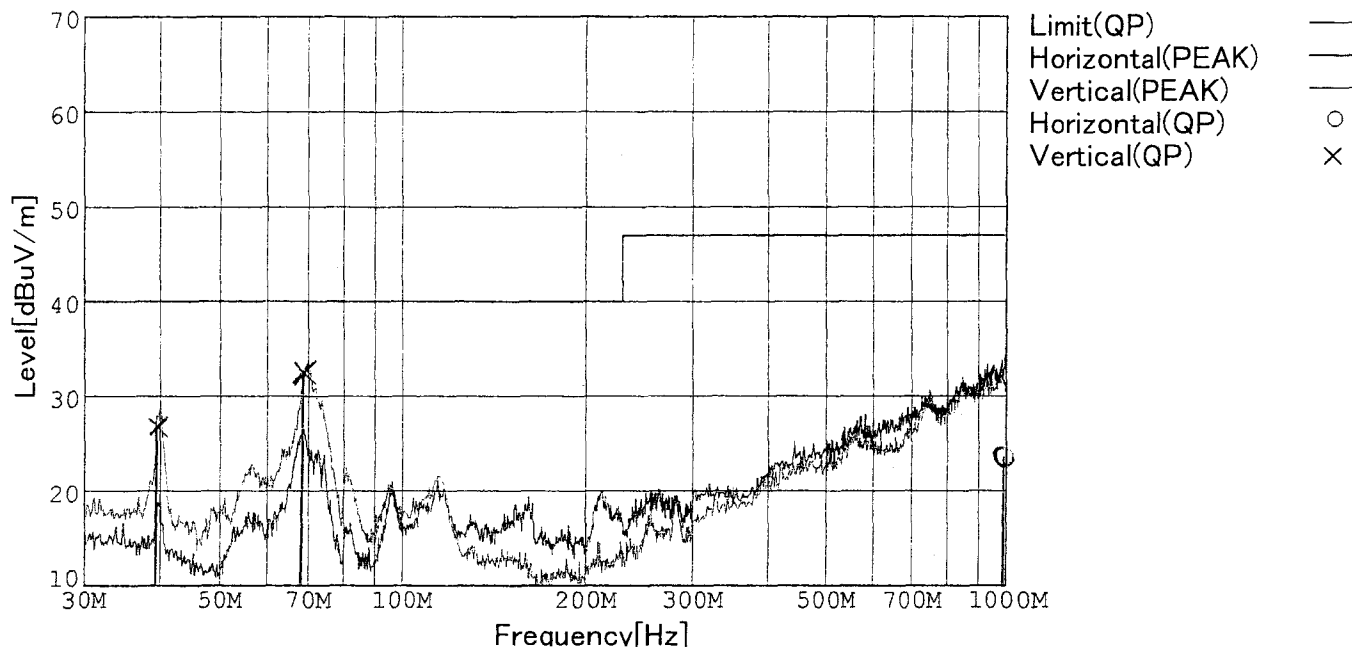


Frequency [MHz]	Meter Reading (QP) [dBuV]	Antena Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
989.974	22.4	25.0	-23.9	23.5	226	132	Hori.	47.0	23.5
39.335	40.1	13.0	-26.3	26.8	351	126	Vert.	40.0	13.2
69.193	50.5	5.0	-23.5	32.0	347	116	Vert.	40.0	8.0



LINE CONDUCTION

Model Name : LDA150W-30
 Model No. :
 Serial No. :
 Points : 3
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Limit1:[CISPR Pub22] Class B(QP)
 Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply : 230V(1 Phase) 50Hz
 Temp. : 25degC
 Humi. : 44%
 Date : 2001/9/15
 Test Equip. : R3132,ESPC
 Comment :

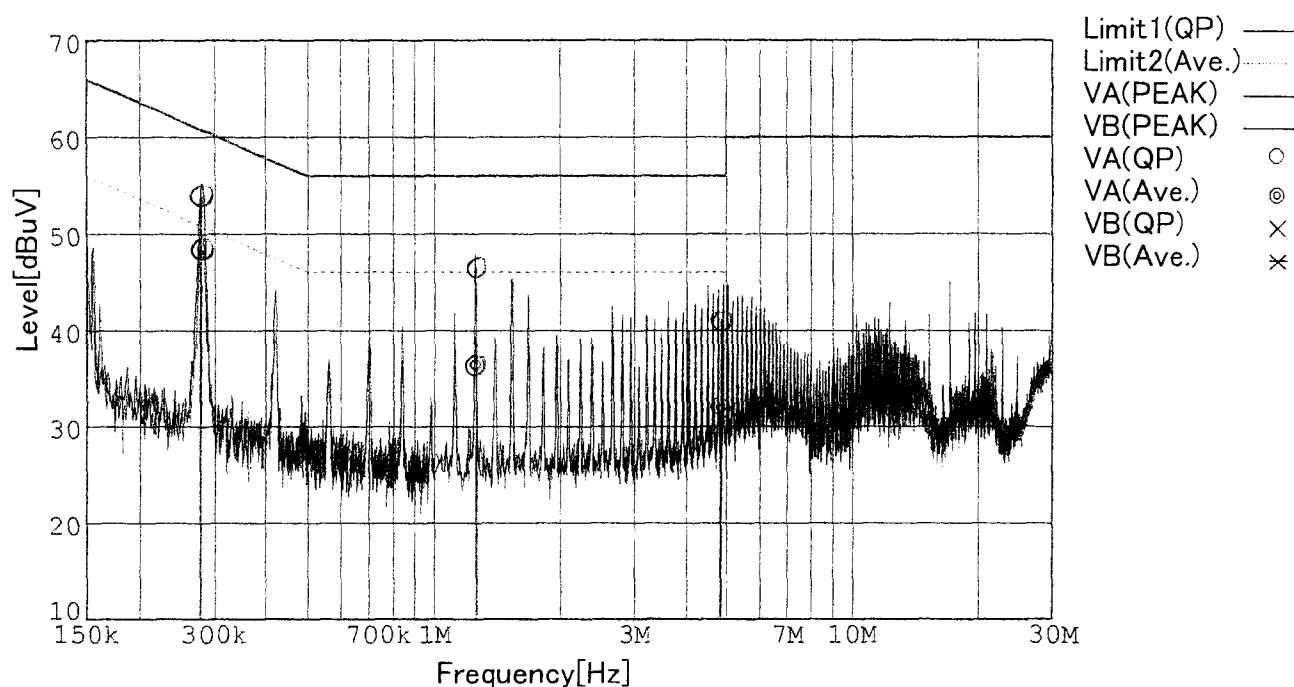

Frequency [MHz]	Meter Reading (QP) [dBuV]	Meter Reading (Ave.) [dBuV]	Factor [dB]	Level (QP) [dBuV]	Level (Ave.) [dBuV]	Line	Limit (QP) [dBuV]	Limit (Ave.) [dBuV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.2791	44.2	38.3	9.8	54.0	48.1	VA	60.9	50.9	6.9	2.8
1.2582	36.6	25.9	9.9	46.5	35.8	VA	56.0	46.0	9.5	10.2
4.8951	30.8	22.7	10.0	40.8	32.7	VA	56.0	46.0	15.2	13.3