



RADIATED EMISSION

Model Name : LDA300W-18

Model No. :

Serial No. :

Points : 3

Detector : PEAK/QP

Polarization : Hori. & Vert.

Limit: [CISPR 22] Class B<3m>

Power Supply : 230V(1 Phase) 50Hz


Temp. : 25degC

Humi. : 44%

Date : 2003/4/3 18:57

Test Equip. : R3132,ESPC

Comment :

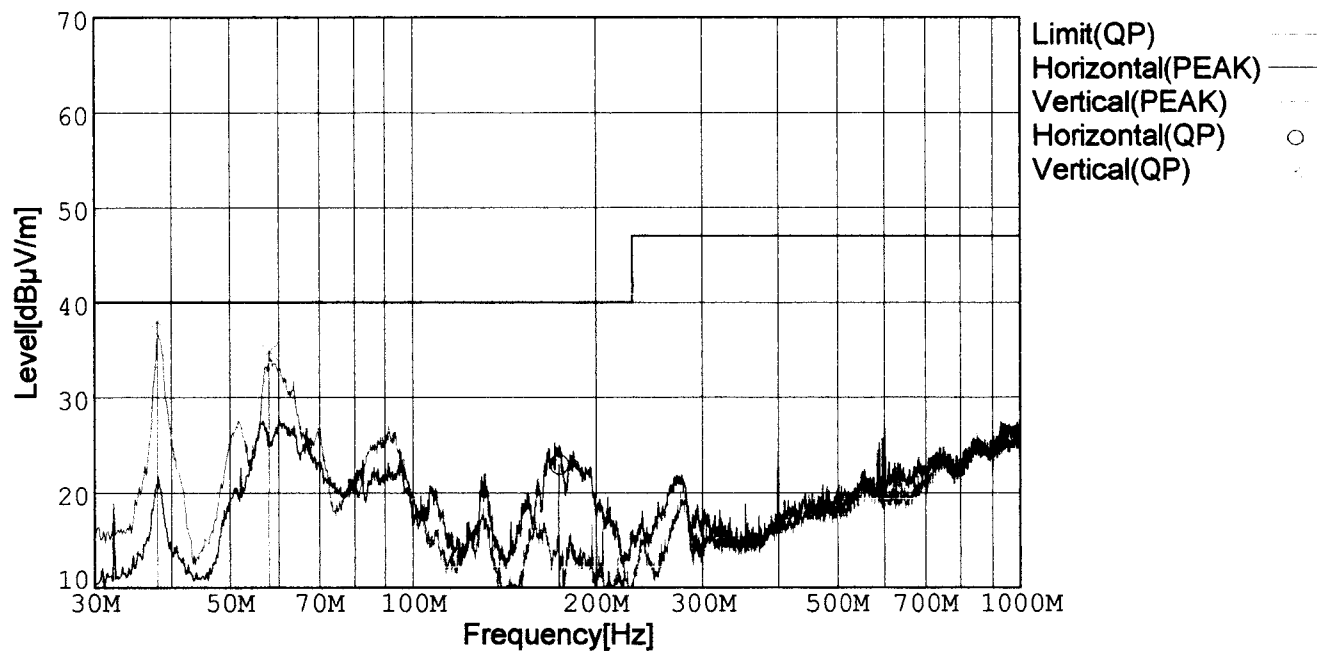

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBμV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
174.623	38.1	BL	8.4	-23.6	22.9	35	143	Hori.	40.0	17.1
38.048	51.0	BL	13.7	-26.7	38.0	326	104	Vert.	40.0	2.0
57.981	53.0	BL	4.7	-22.9	34.8	216	122	Vert.	40.0	5.2

BL: Biconi-Log

LINE CONDUCTION

Model Name : LDA300W-18

Model No. :

Serial No. :

Points : 4

Detector : PEAK/QP/Ave.

Line Mode : VA/VB

Limit1: [CISPR Pub22] Class B(QP)

Limit2: [CISPR Pub22] Class B(Ave.)

Power Supply : 'P'S 230V 50Hz


Temp. : 25degC

Humi. : 44%

Date : 2003/3/28 10:19

Test Equip. : R3132,ESPC

Comment :

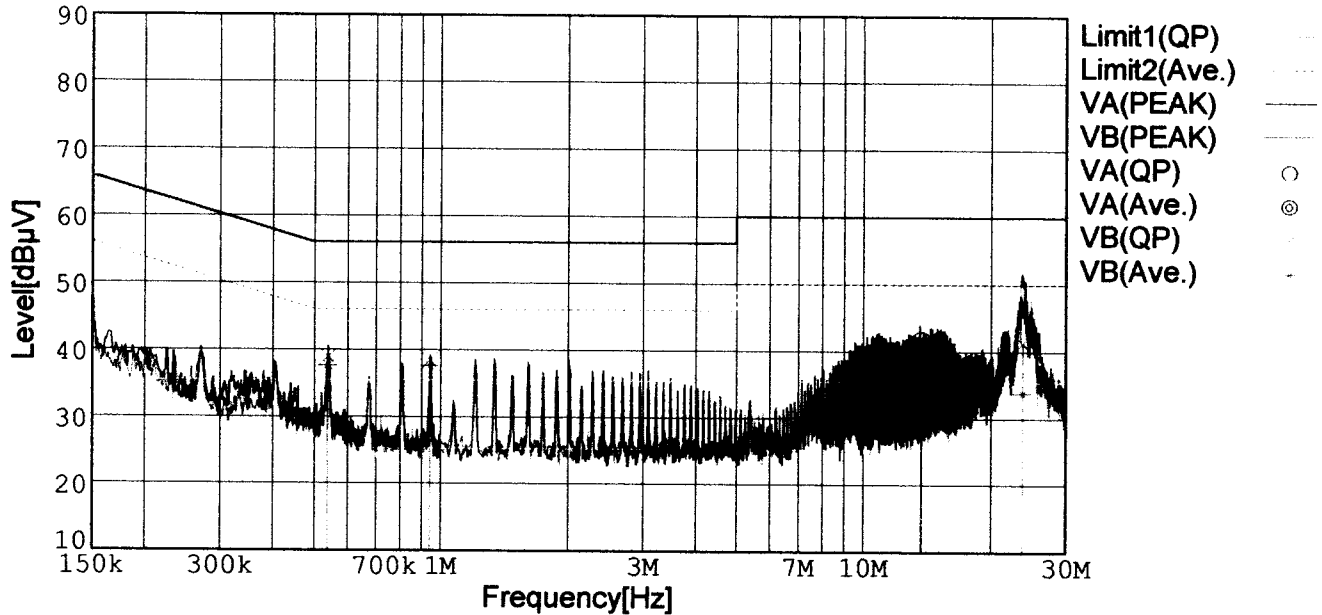

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP)[dB]	Margin (Ave.) [dB]
13.7183	30.9	27.8	10.6	41.5	38.4	VA	60.0	50.0	18.5	11.6
0.5396	28.8	27.5	10.1	38.9	37.6	VB	56.0	46.0	17.1	8.4
0.9424	28.3	27.5	10.1	38.4	37.6	VB	56.0	46.0	17.6	8.4