



# RADIATED EMISSION

Model Name : LDA300W-48

Model No. :

Serial No. :

Points : 4

Detector : PEAK/QP

Polarization : Hori. & Vert.

Limit: [CISPR 22] Class B<3m>

Power Supply : 230V(1 Phase) 50Hz


Temp. : 25degC

Humi. : 44%

Date : 2003/4/9 16:31

Test Equip. : R3132,ESPC

Comment : Io=100%

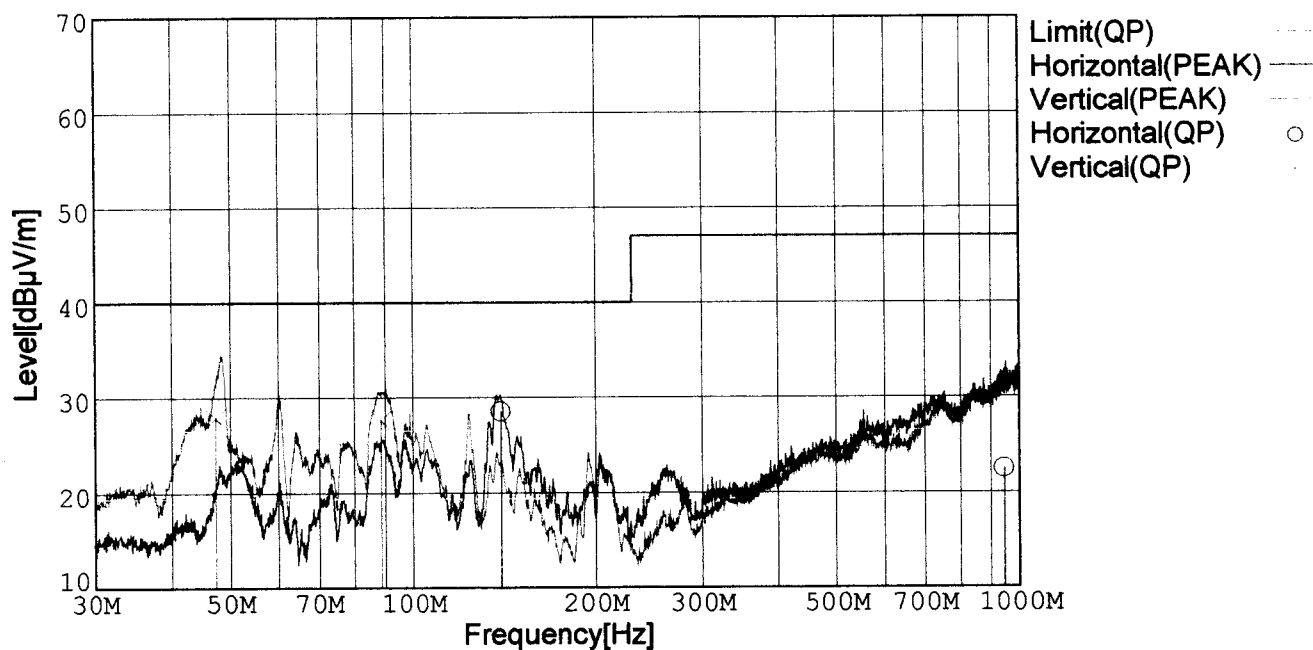

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBμV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
47.435	43.8	BL	-28.5	12.6	27.9	232	107	Vert.	40.0	12.1
88.712	44.2	BL	-28.0	11.4	27.6	243	153	Vert.	40.0	12.4
139.975	42.5	BL	-27.7	13.8	28.6	174	156	Hori.	40.0	11.4
947.401	20.7	BL	-25.6	27.4	22.5	335	113	Hori.	47.0	24.5

BL: Biconi-Log



# LINE CONDUCTION

Model Name : LDA300W-48

Model No. :

Serial No. :

Points : 4

Detector : PEAK/QP/Ave.

Line Mode : VA/VB

Limit1: [CISPR Pub22] Class B(QP)

Limit2: [CISPR Pub22] Class B(Ave.)

Power Supply : 230V (1 Phase) 50Hz


Temp. : 25degC

Humi. : 44%

Date : 2003/4/3 20:28

Test Equip. : R3132,ESPC

Comment :

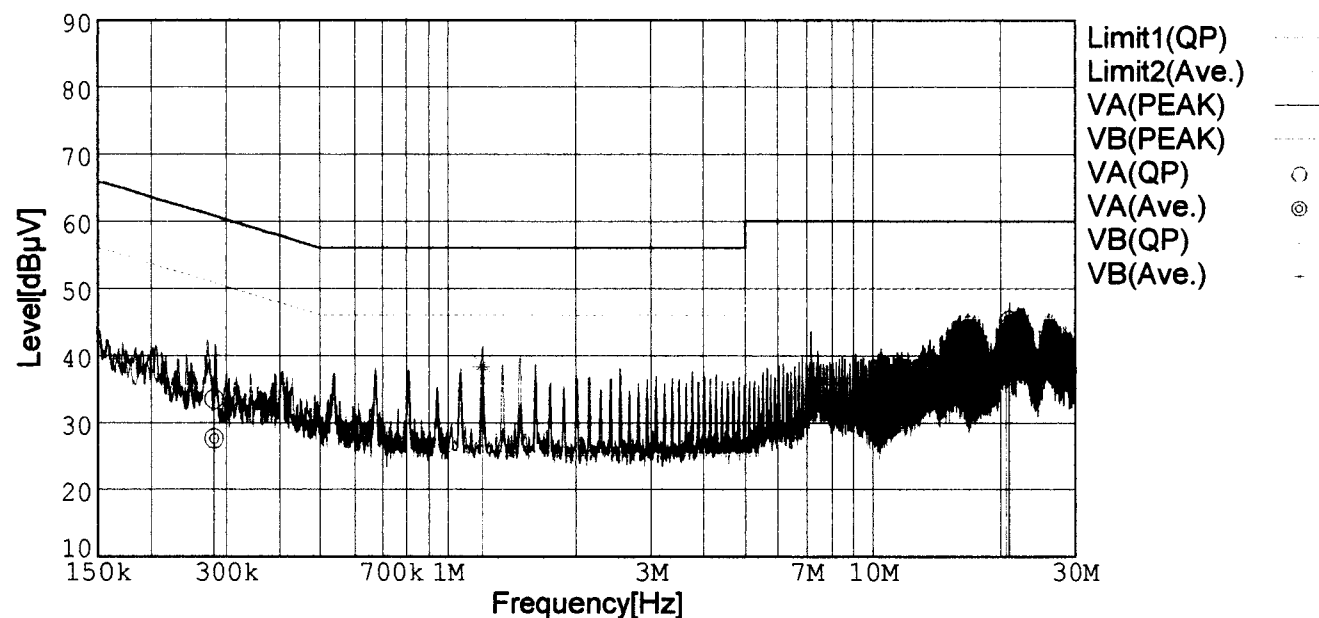

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP)[dB]	Margin (Ave.) [dB]
0.2803	23.4	17.5	10.0	33.4	27.5	VA	60.8	50.8	27.4	23.3
21.0071	34.2	33.2	10.9	45.1	44.1	VA	60.0	50.0	14.9	5.9
1.2043	28.6	28.1	10.1	38.7	38.2	VB	56.0	46.0	17.3	7.8
20.6132	31.9	30.5	10.8	42.7	41.3	VB	60.0	50.0	17.3	8.7