

*****<I P S Corporation>*****
 <<< RADIATED EMISSION >>>

17 July, 1997 13:15

Page 1

Model : COSEL LDA300W-5
 Serial No. : 001
 Standard : EN55022 Class B
 Condition File : 104
 Condition :
 Remarks : EUT NAME : POWER SUPPLY
 :
 : FILE No. : 001
 AC Power : 230 V 50 Hz
 Temperature : 25 deg.
 Humidity : 65 %
 Operator : Y.NAGAHARA

 ----- Final Result -----

- Horizontal Polarization -

No.	Frequency [MHz]	Reading [dBuV]	c.f. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1	51.262	23.1	-14.6	8.5	30.0	21.5
2	77.051	21.7	-15.2	6.5	30.0	23.5
3	86.049	21.4	-13.8	7.6	30.0	22.4
4	95.959	21.2	-12.3	8.9	30.0	21.1
5	158.965	20.8	-10.1	10.7	30.0	19.3
6	180.526	20.1	-11.0	9.1	30.0	20.9
7	264.202	20.2	-5.4	14.8	37.0	22.2

- Vertical Polarization -

No.	Frequency [MHz]	Reading [dBuV]	c.f. [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]
8	51.346	29.8	-14.6	15.2	30.0	14.8
9	76.881	25.1	-15.2	9.9	30.0	20.1
10	85.624	25.7	-13.9	11.8	30.0	18.2
11	96.039	24.6	-12.2	12.4	30.0	17.6
12	158.616	22.3	-10.0	12.3	30.0	17.7
13	181.491	23.9	-11.0	12.9	30.0	17.1
14	263.218	20.4	-5.4	15.0	37.0	22.0

< I P S Corporation >

<< RADIATED EMISSION >>>

Date/Time : 17 July, 1997 13:15

I P S EMC SITE

Model : COSEL LDA300W-5


Standard : EN55022 Class B

Serial No. : 001

Operator : Y. NAGAHARA

Remarks : EUT NAME : POWER SUPPLY





FILE No. : 001




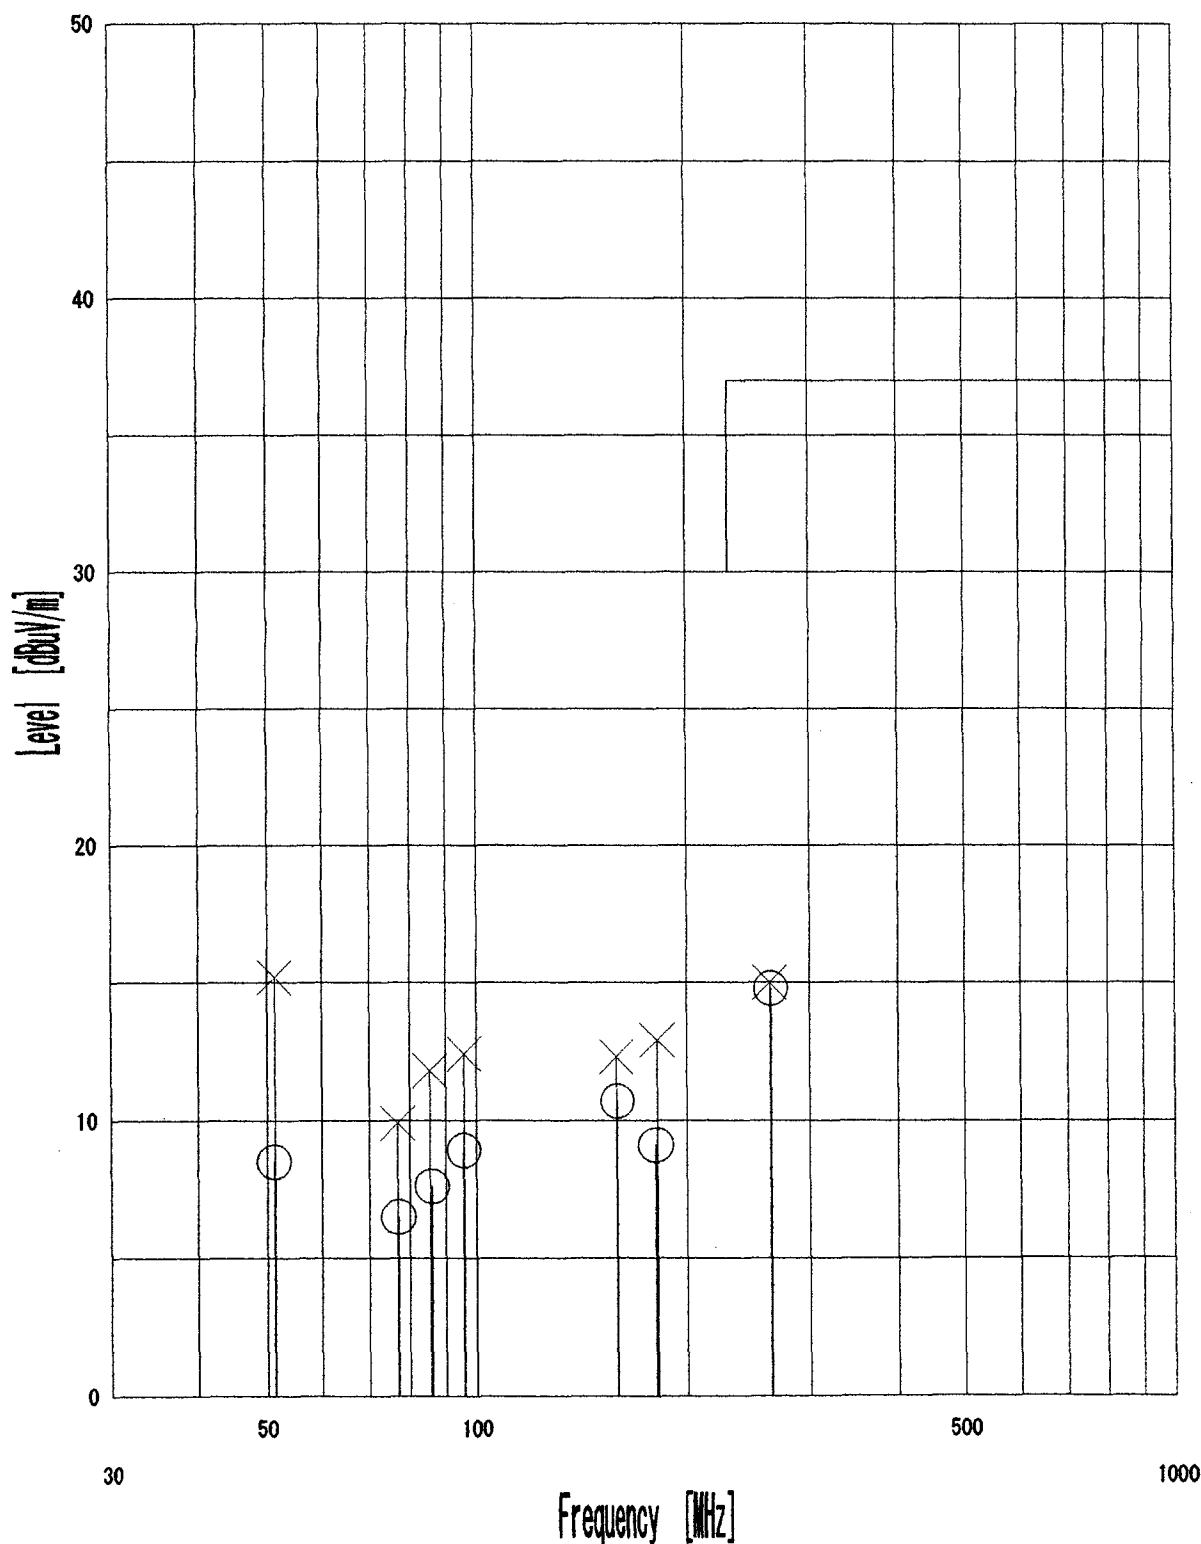






<Limit Line>
— Interf.





Limit:
EN55022B

<Data>
○ : Horizontal
× : Vertical

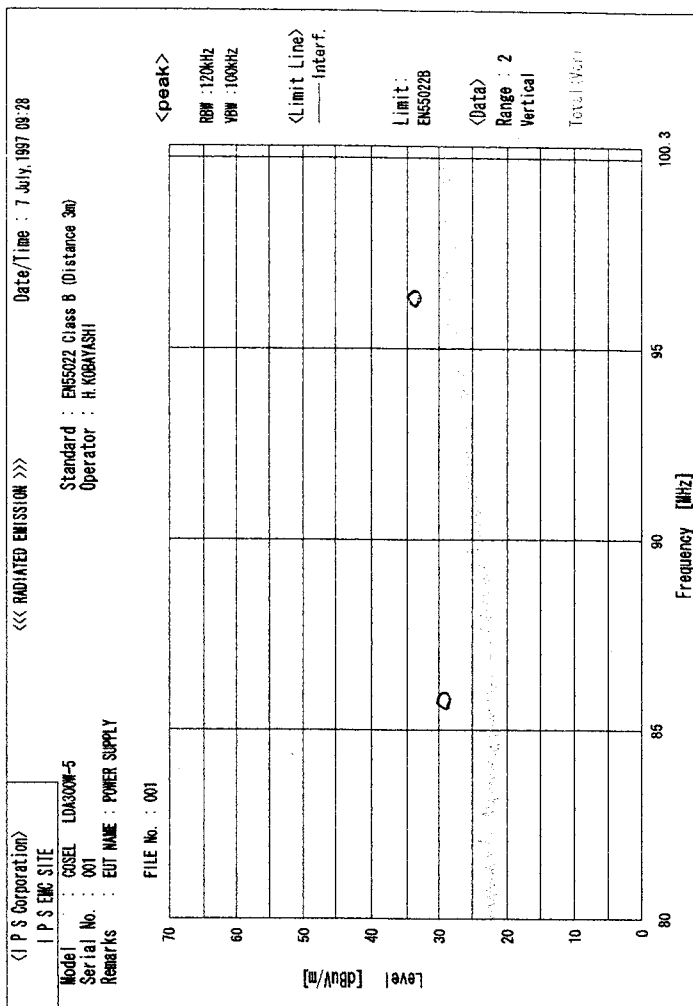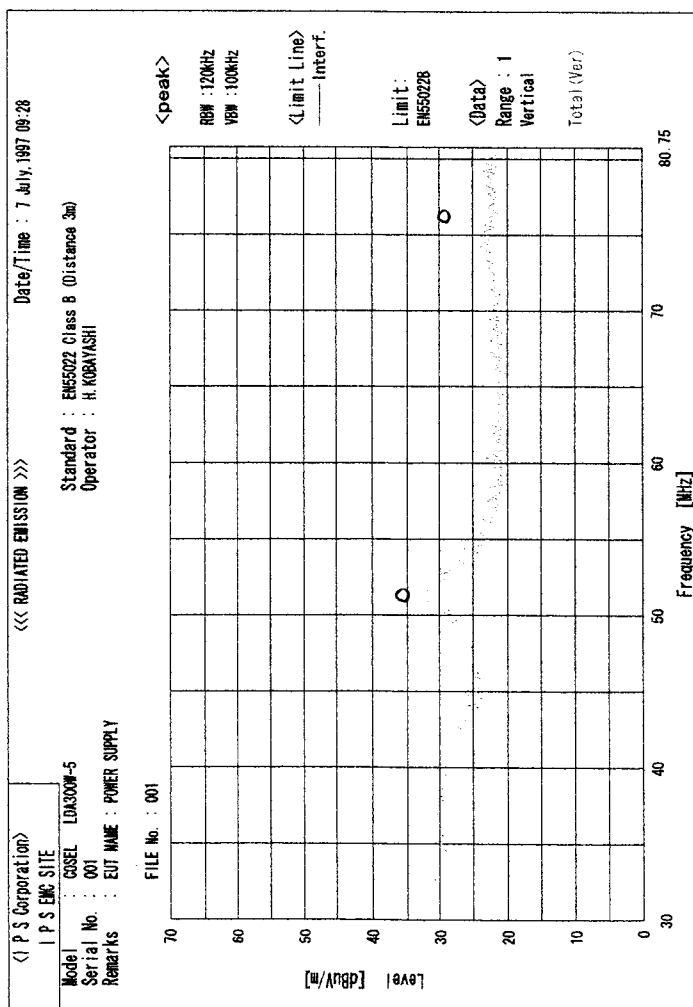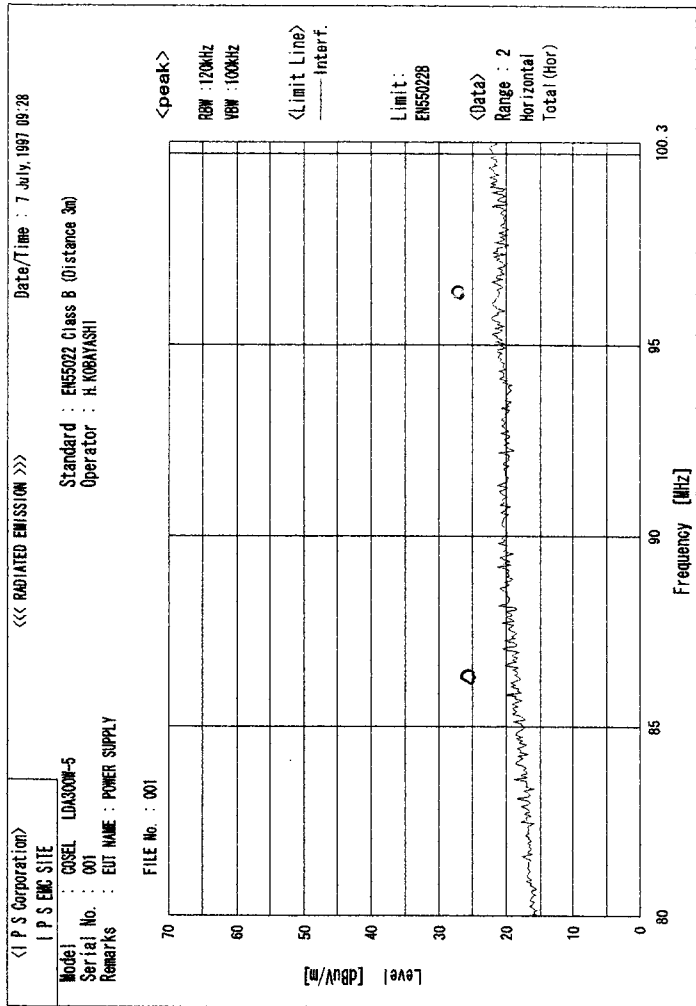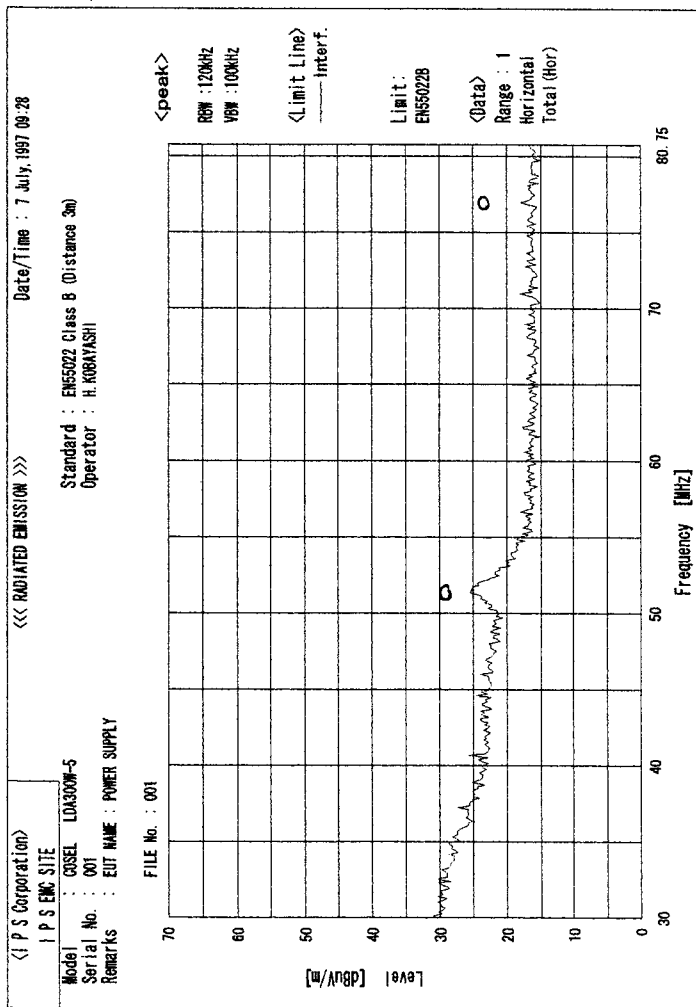

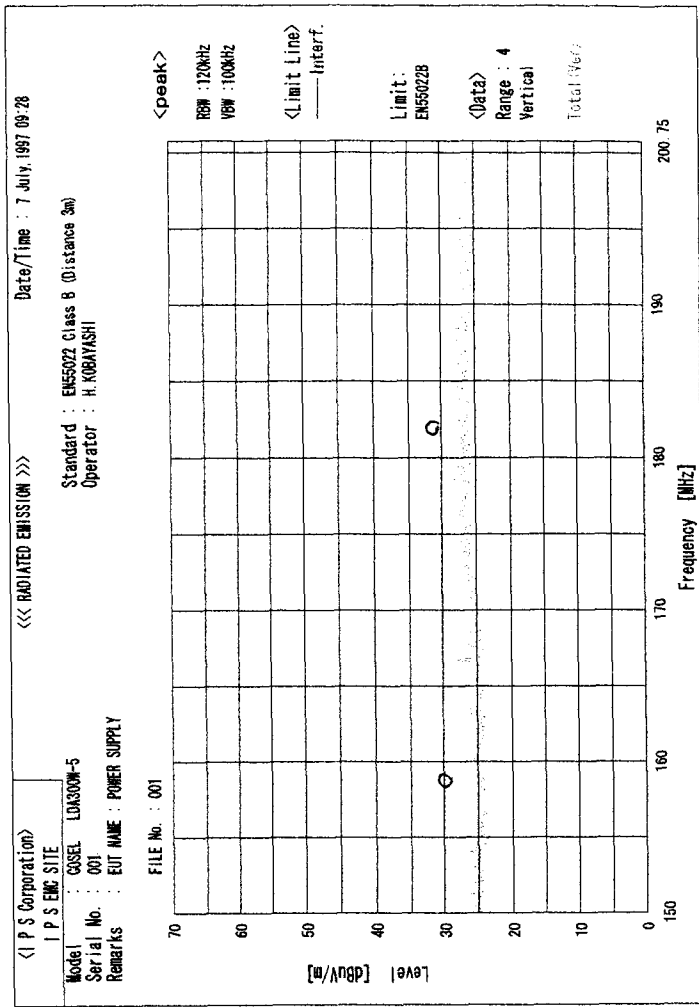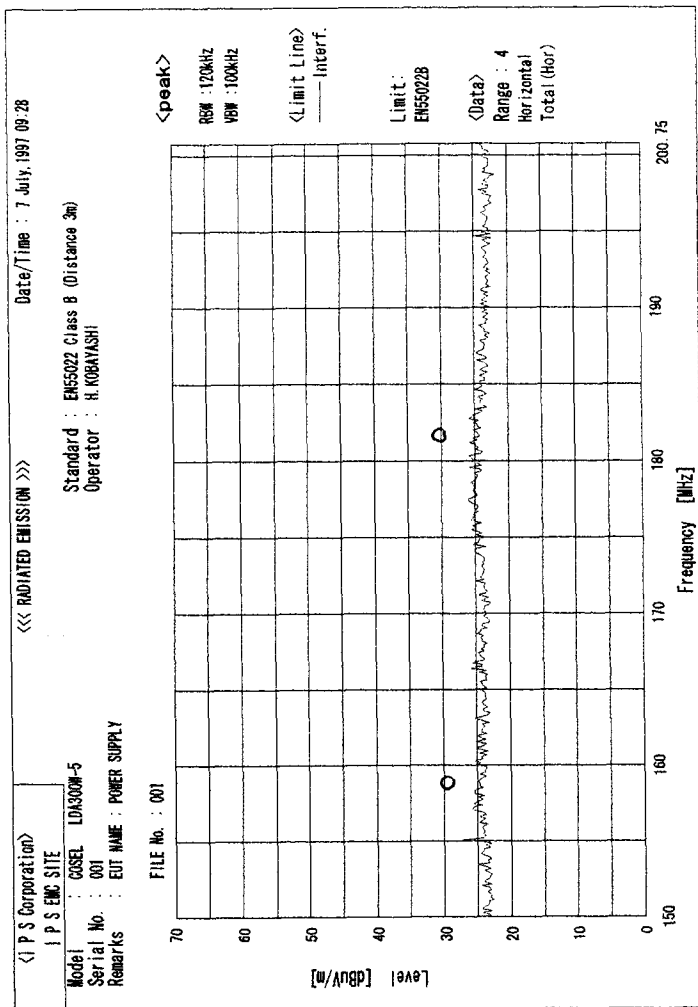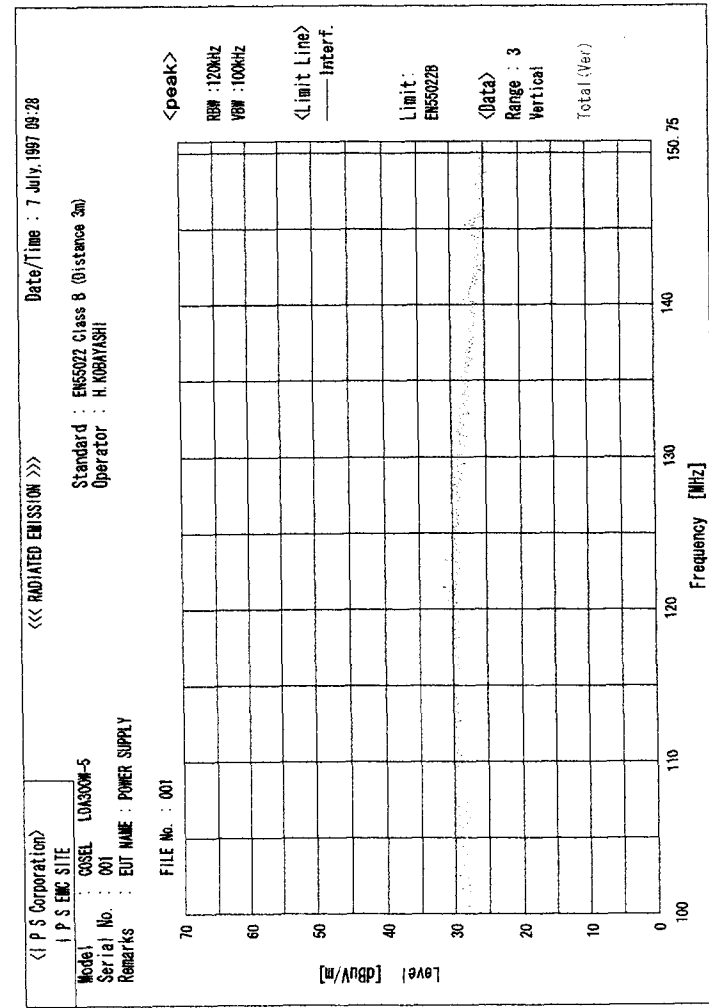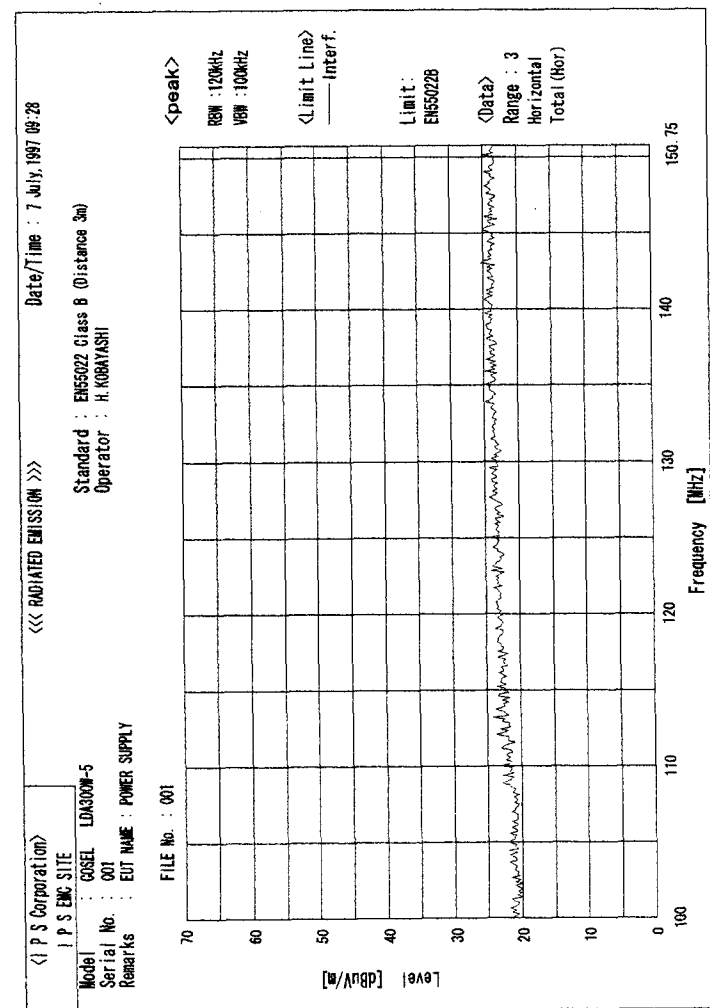

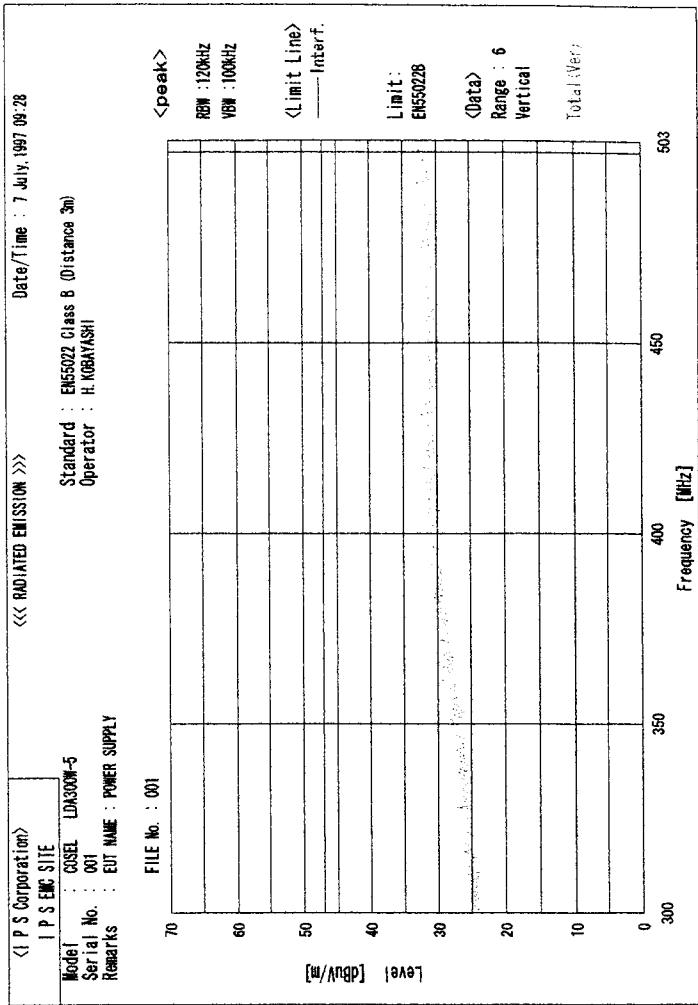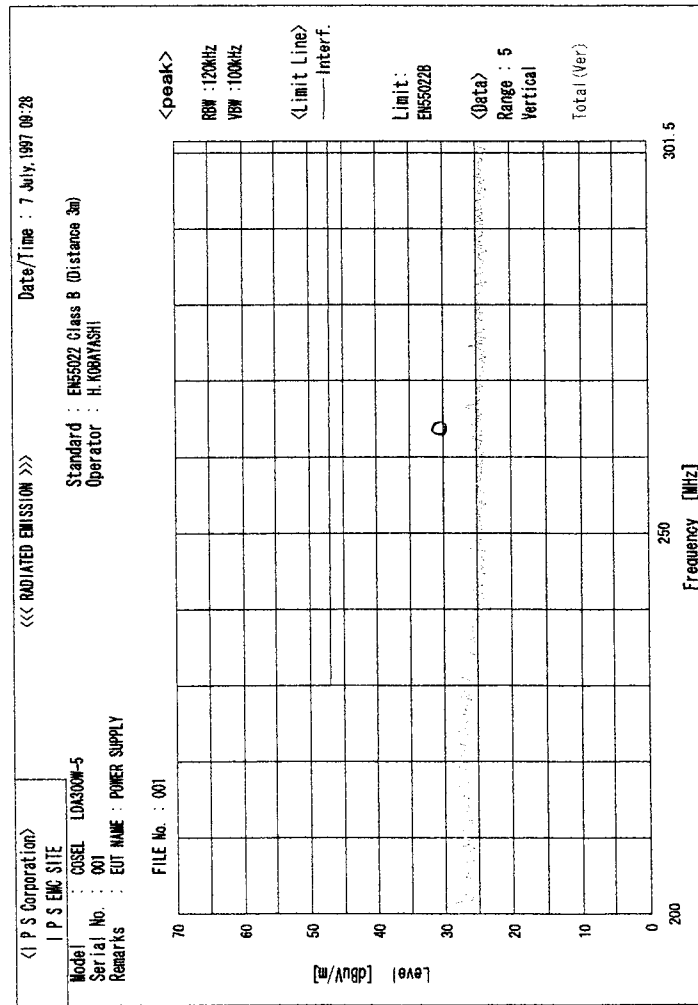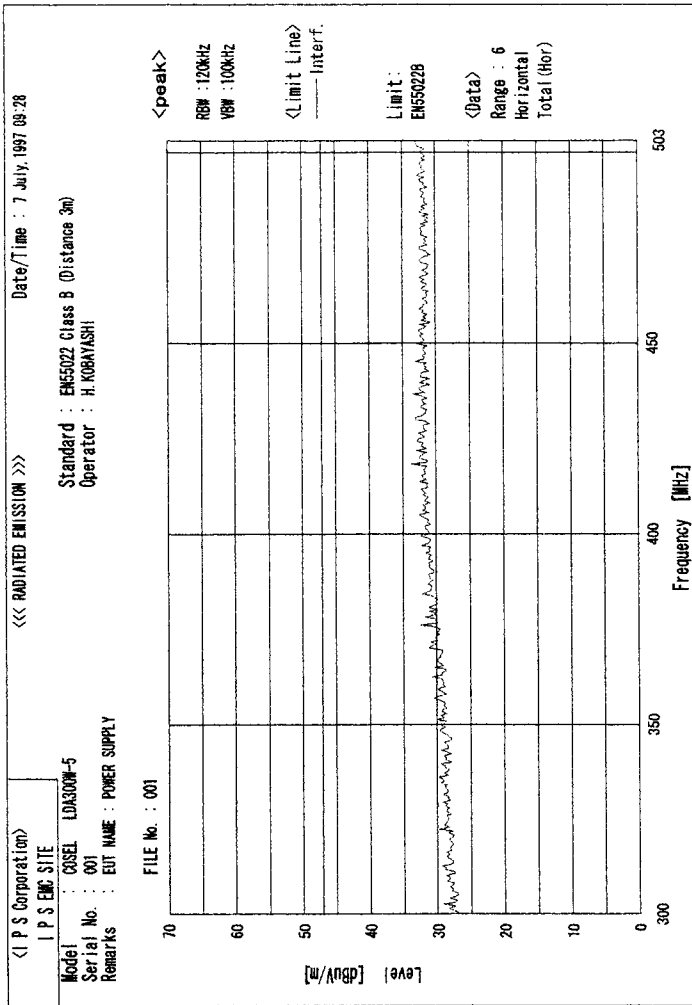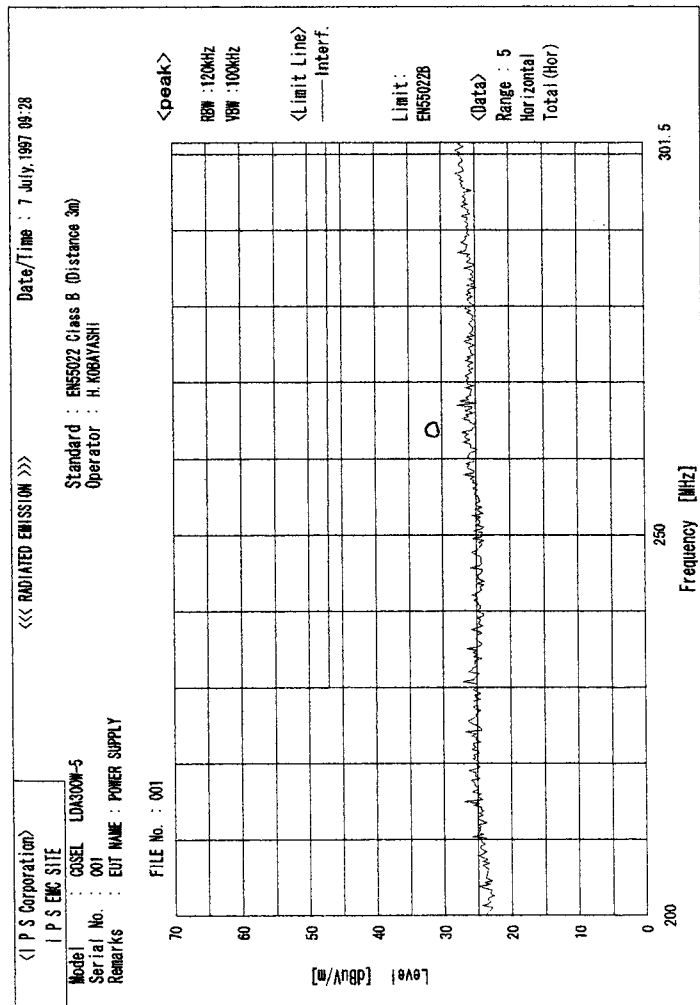

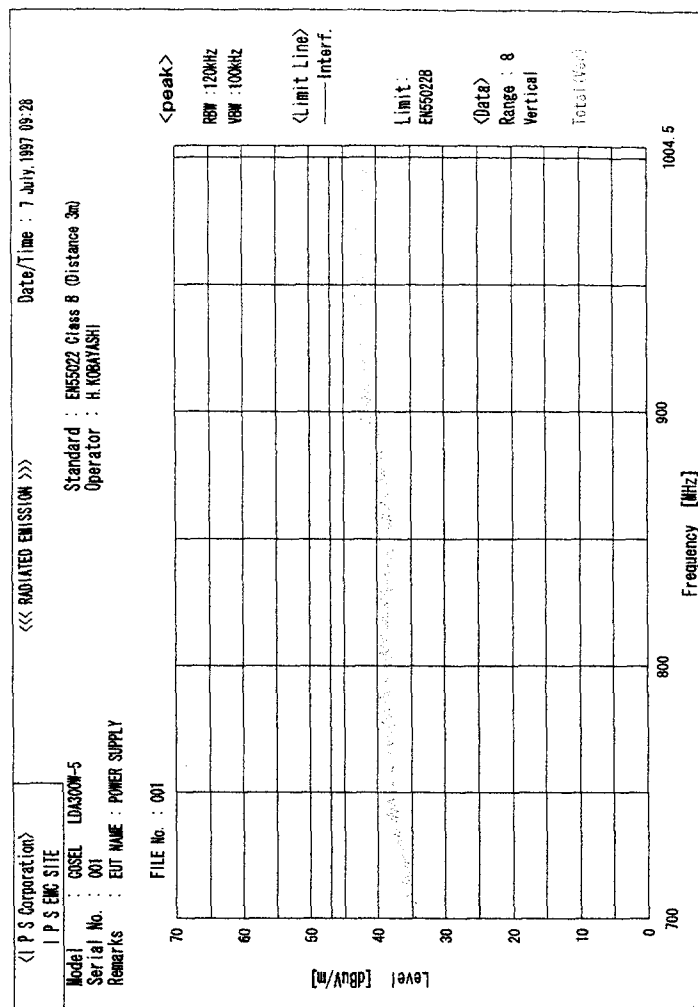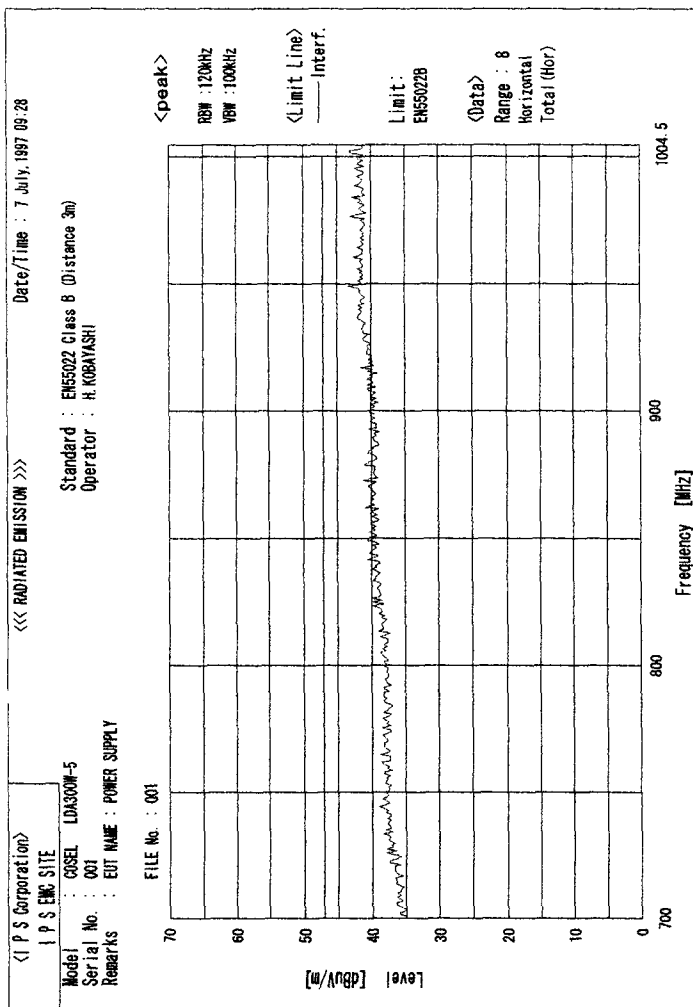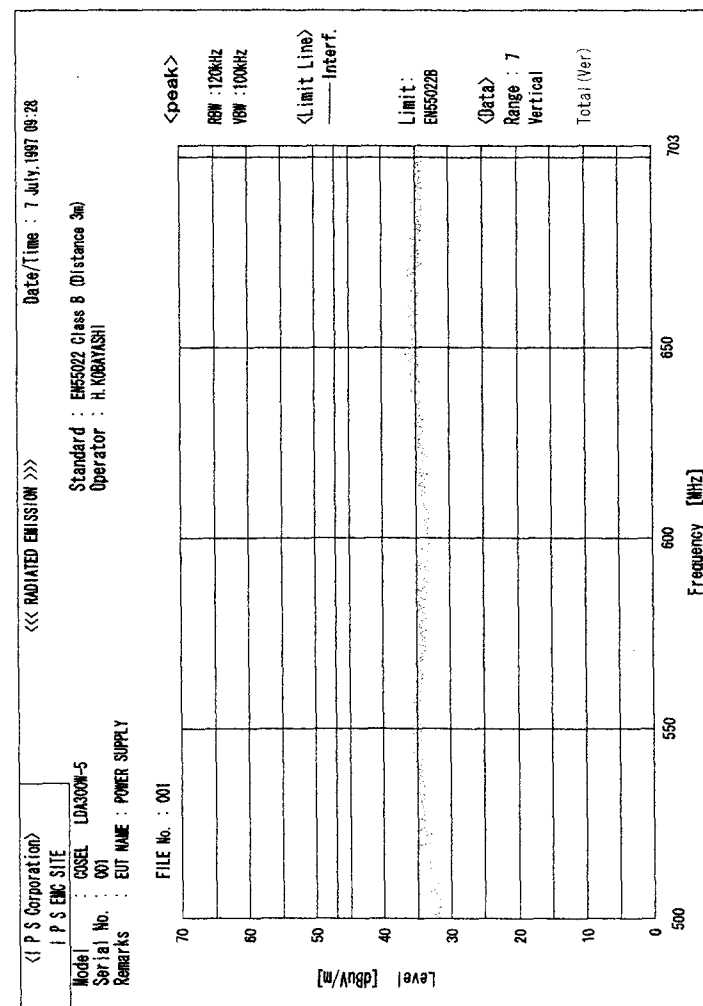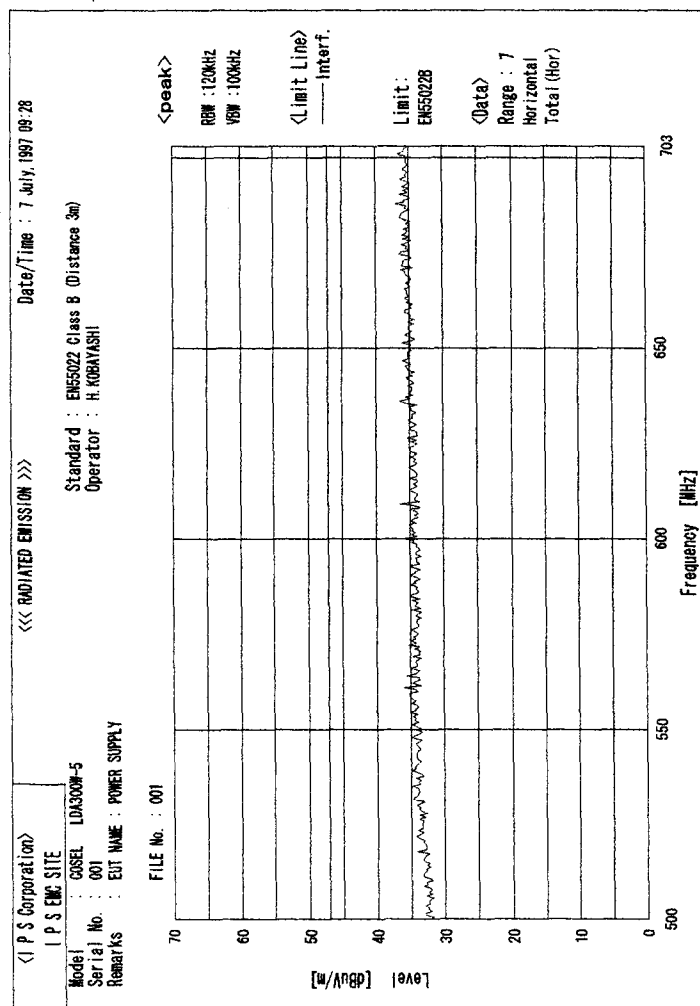

***** <I P S Corporation> *****
 <<< CONDUCTED EMISSION >>>

9 July, 1997 16:48
 Page 1

Model : COSEL LDA300W-5
 Serial No. : 001
 Standard : EN55022 Class B
 Condition File : 104
 Remark :
 : EUT NAME : POWER SUPPLY
 :
 : FILE No. : 001
 AC Power : 230 V 50 Hz
 Temperature : 25 deg.
 Humidity : 65 %
 Operator : T.YAMAGUCHI

----- Results -----

No.	Frequency	Reading		c.f.	Result		Limit		Margin	
		QP	AV		QP	AV	QP	AV	QP	AV
	[MHz]	[dBuV]	[dBuV]	[dB]	[dBuV]	[dBuV]	[dBuV]	[dBuV]	[dB]	[dB]
Phase N										
1	0.15000	31.2		10.0	41.2		66.0	56.0	24.8	
2	0.26060	37.3		10.0	47.3		61.4	51.4	14.1	
3	0.65330	33.0		10.0	43.0		56.0	46.0	13.0	
4	0.91600	34.6		10.0	44.6		56.0	46.0	11.4	
5	1.30890	34.8		10.0	44.8		56.0	46.0	11.2	
6	2.09430	34.0		10.0	44.0		56.0	46.0	12.0	
7	8.25070	23.6		10.0	33.6		60.0	50.0	26.4	
8	13.62190	24.4		10.5	34.9		60.0	50.0	25.1	
Phase L1										
1	0.15000	31.1		10.0	41.1		66.0	56.0	24.9	
2	0.26030	39.9		10.0	49.9		61.4	51.4	11.5	
3	0.65380	32.8		10.0	42.8		56.0	46.0	13.2	
4	0.91590	34.3		10.0	44.3		56.0	46.0	11.7	
5	1.30930	34.0		10.0	44.0		56.0	46.0	12.0	
6	2.09540	32.9		10.0	42.9		56.0	46.0	13.1	
7	8.11910	21.2		10.0	31.2		60.0	50.0	28.8	
8	13.75340	22.7		10.5	33.2		60.0	50.0	26.8	

ation>

<<< CONDUCTED EMISSION >>>


Date: 9 July, 1997

I P S EMC SITE

Model : COSEL LDA300W-5
Serial No. : 001
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B
Operator : T. YAMAGUCHI

FILE No. : 001

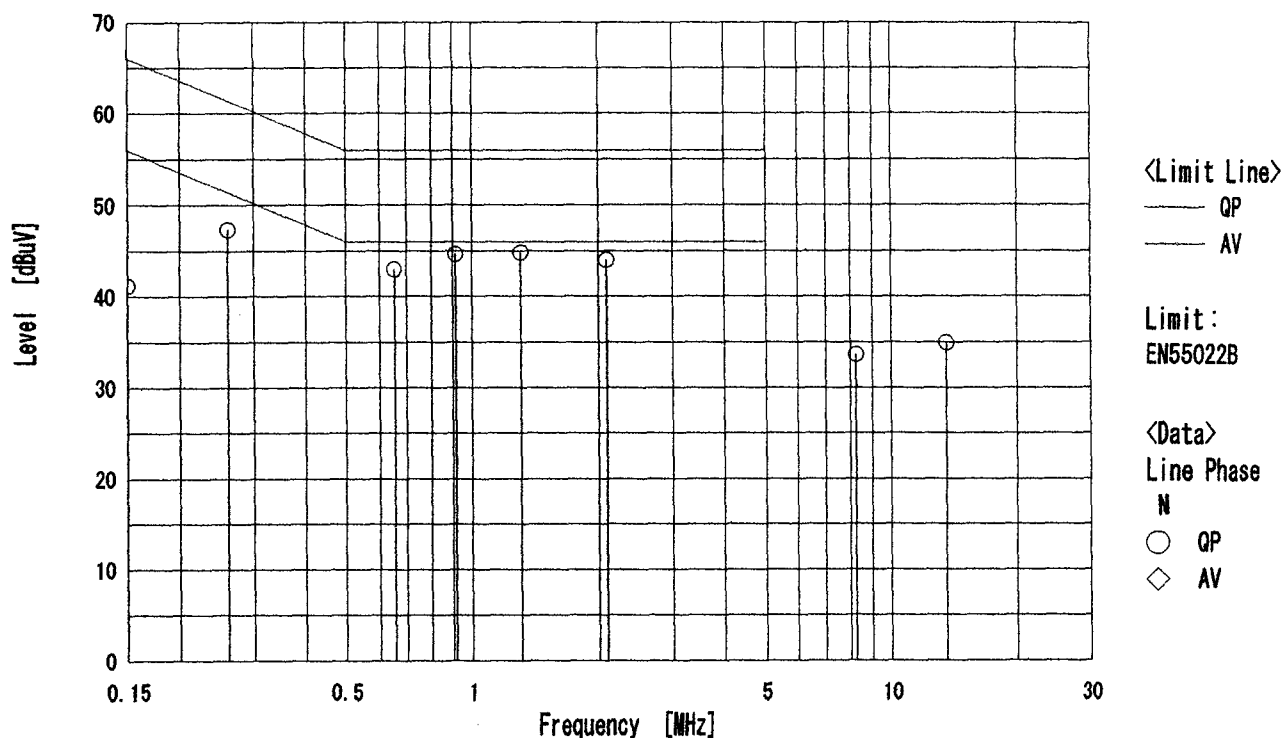

<I P S Corporation>

<<< CONDUCTED EMISSION >>>


Date: 9 July, 1997

I P S EMC SITE

Model : COSEL LDA300W-5
Serial No. : 001
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B
Operator : T. YAMAGUCHI

FILE No. : 001

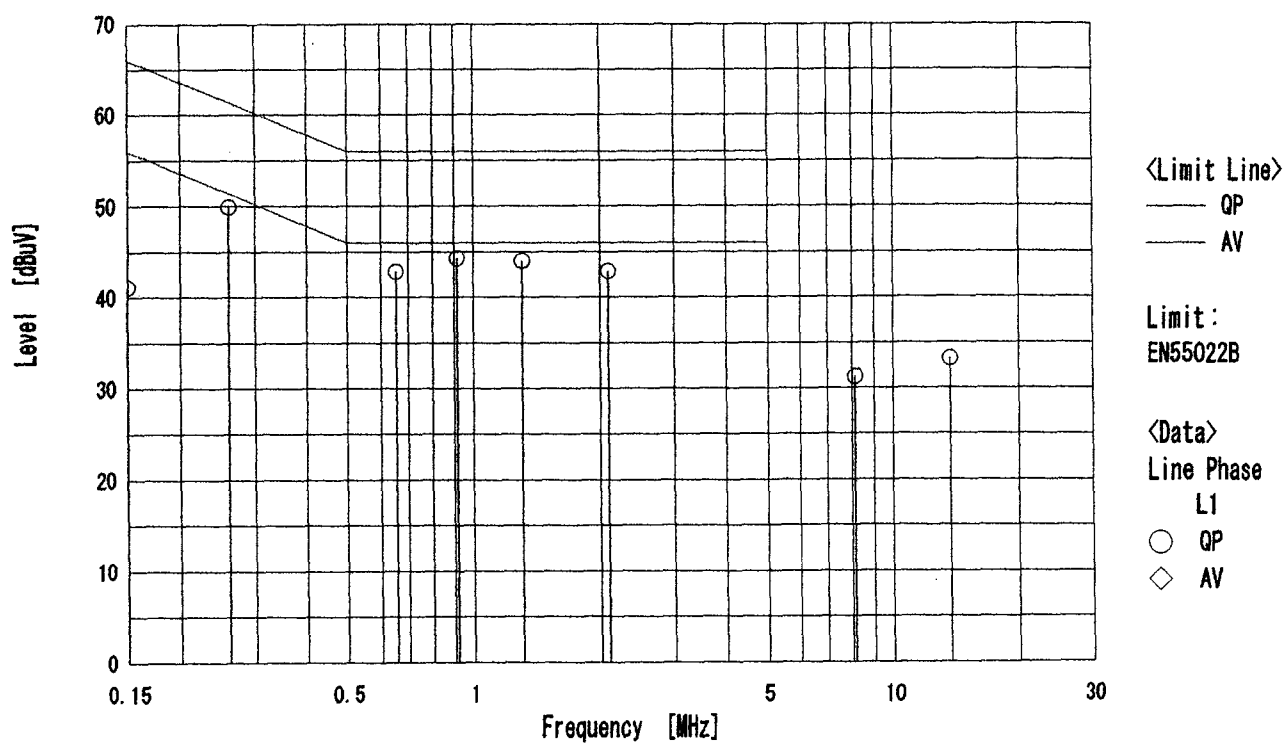


I P S EMC SITE

Model : COSEL LDA300W-5
Serial No. : 001
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B
Operator : T.YAMAGUCHI

FILE No. : 001

<peak>

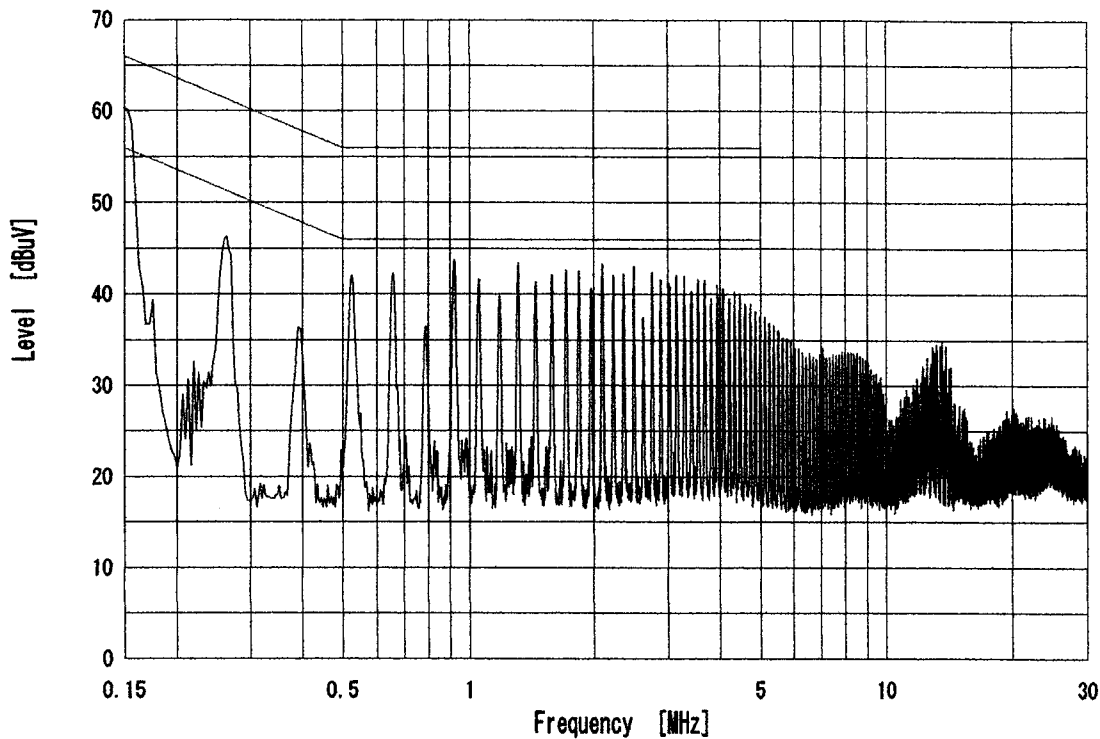

<Limit Line>

— QP
— AV

Limit:
EN55022B

<Data>
Line Phase
N

<I P S Corporation>
I P S EMC SITE

<<< CONDUCTED EMISSION >>>


Date/Time : 9 July, 1997 15:39

Model : COSEL LDA300W-5
Serial No. : 001
Remarks : EUT NAME : POWER SUPPLY

Standard : EN55022 Class B
Operator : T.YAMAGUCHI

FILE No. : 001

<peak>

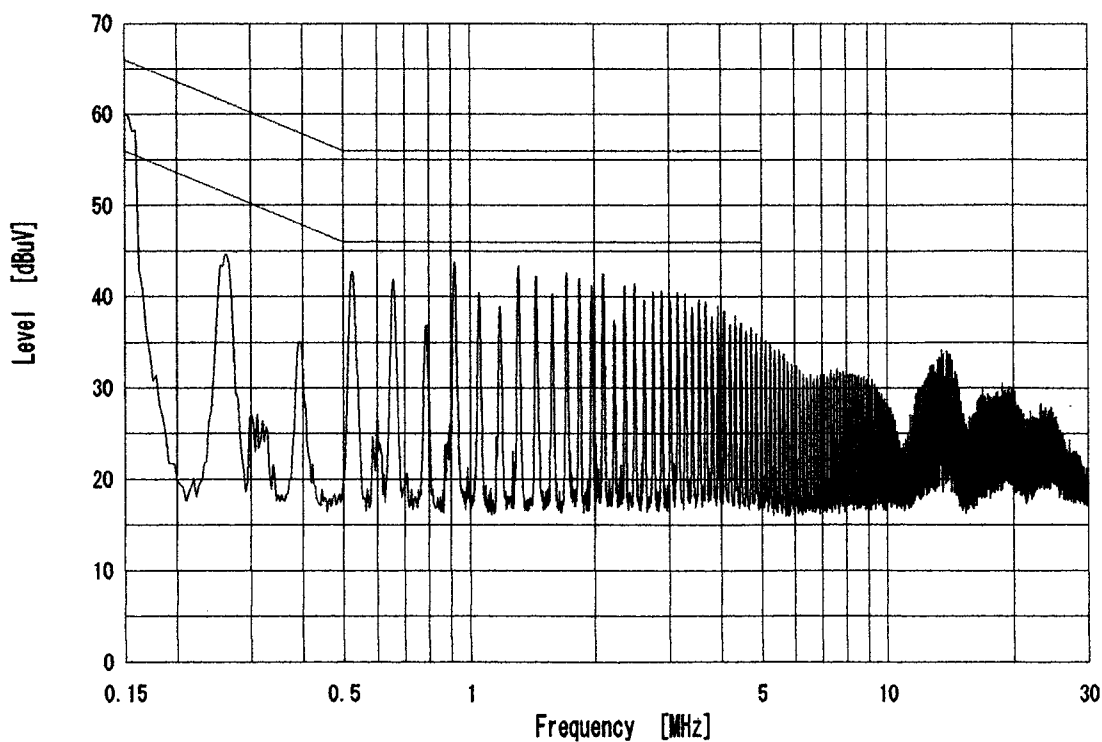

<Limit Line>

— QP
— AV

Limit:
EN55022B

<Data>
Line Phase
L1