


RADIATED EMISSION

Model Name :LDA75F-30
 Model No. :
 Serial No. :
 Points :4
 Detector :PEAK/QP
 Polarization :Hori.&Vert.
 Limit:[CISPR 22] Class B<3m>

Power Supply :230V(1 Phase) 50Hz
 Temp. :25degC
 Humi. :44%
 Date :2001/7/16
 Test Equip. :R3132,ESPC
 Comment :

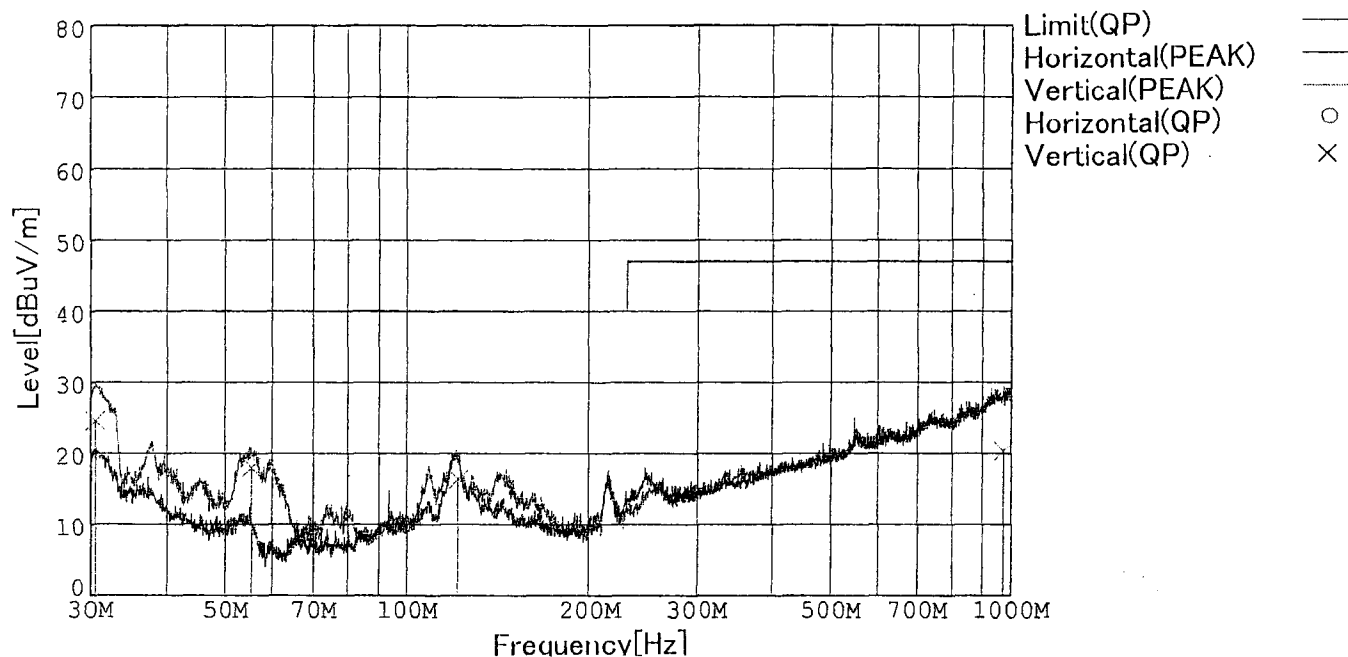

Frequency [MHz]	Meter Reading (QP) [dBuV]	Antena Factor [dBuV]	Cable & Preamp [dB]	Level (Qp) [dBuV]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
30.551	38.8	17.9	-32.1	24.6	229	109	Vert.	40.0	15.4
55.266	44.3	5.6	-31.9	18.0	359	106	Vert.	40.0	22.0
121.430	36.9	11	-31.5	16.4	265	150	Vert.	40.0	23.6
973.343	24.2	25.3	-29.2	20.3	279	149	Vert.	47.0	26.7



LINE CONDUCTION

Model Name :LDA75F-30

Model No. :

Serial No. :

Points :4

Detector :PEAK/QP/Ave.

Line Mode :VA/VB

Limit1:[CISPR Pub22] Class B(QP)

Limit2:[CISPR Pub22] Class B(Ave.)

Power Supply :230V(1 Phase) 50Hz


Temp. :25degC

Humi. :44%

Date :2001/7/18

Test Equip. :R3132,ESPC

Comment :

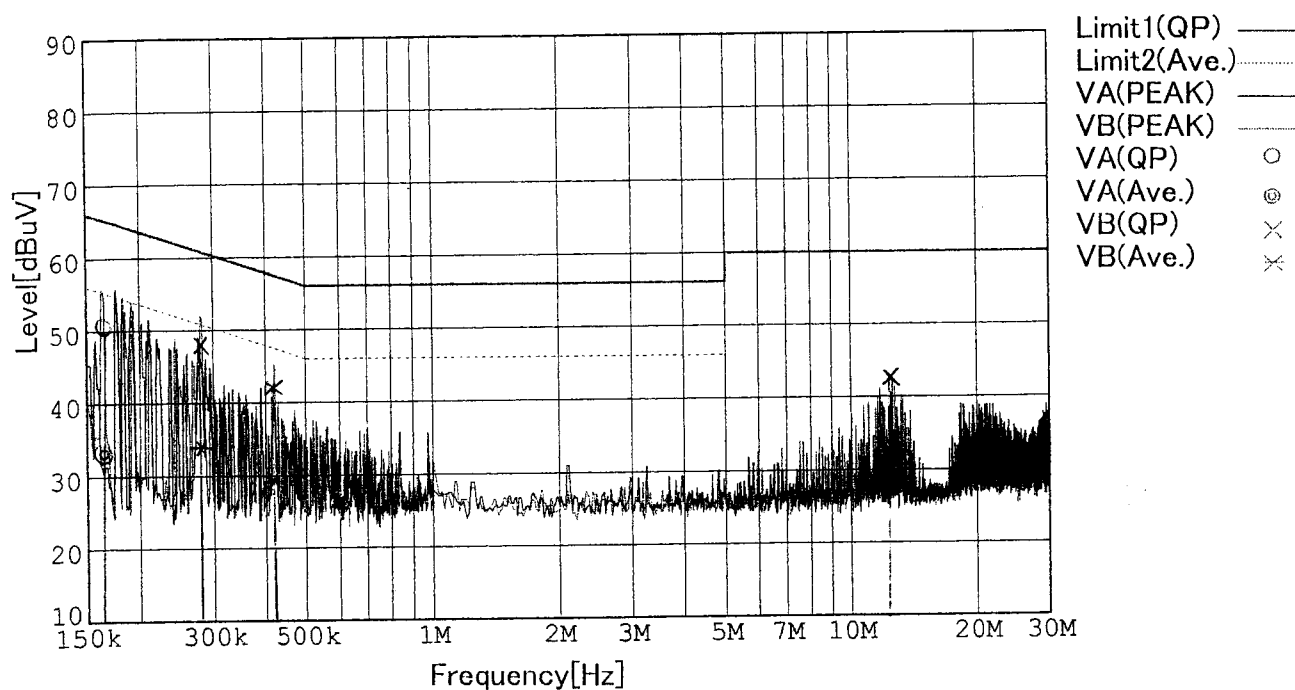

Frequency [MHz]	Meter Reading (QP) [dBuV]	Meter Reading (Ave.) [dBuV]	Factor [dB]	Level (QP) [dBuV]	Level (Ave.) [dBuV]	Line	Limit (QP) [dBuV]	Limit (Ave.) [dBuV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.1700	39.4	22.2	10.3	49.7	32.5	VA	65.0	55.0	15.3	22.5
0.2843	36.1	23.3	10.3	46.4	33.6	VB	60.7	50.7	14.3	17.1
0.4249	31.4	19.4	10.2	41.6	29.6	VB	57.4	47.4	15.8	17.8
12.5801	32.3	23.3	10.5	42.8	33.8	VB	60.0	50.0	17.2	16.2