


COSEL

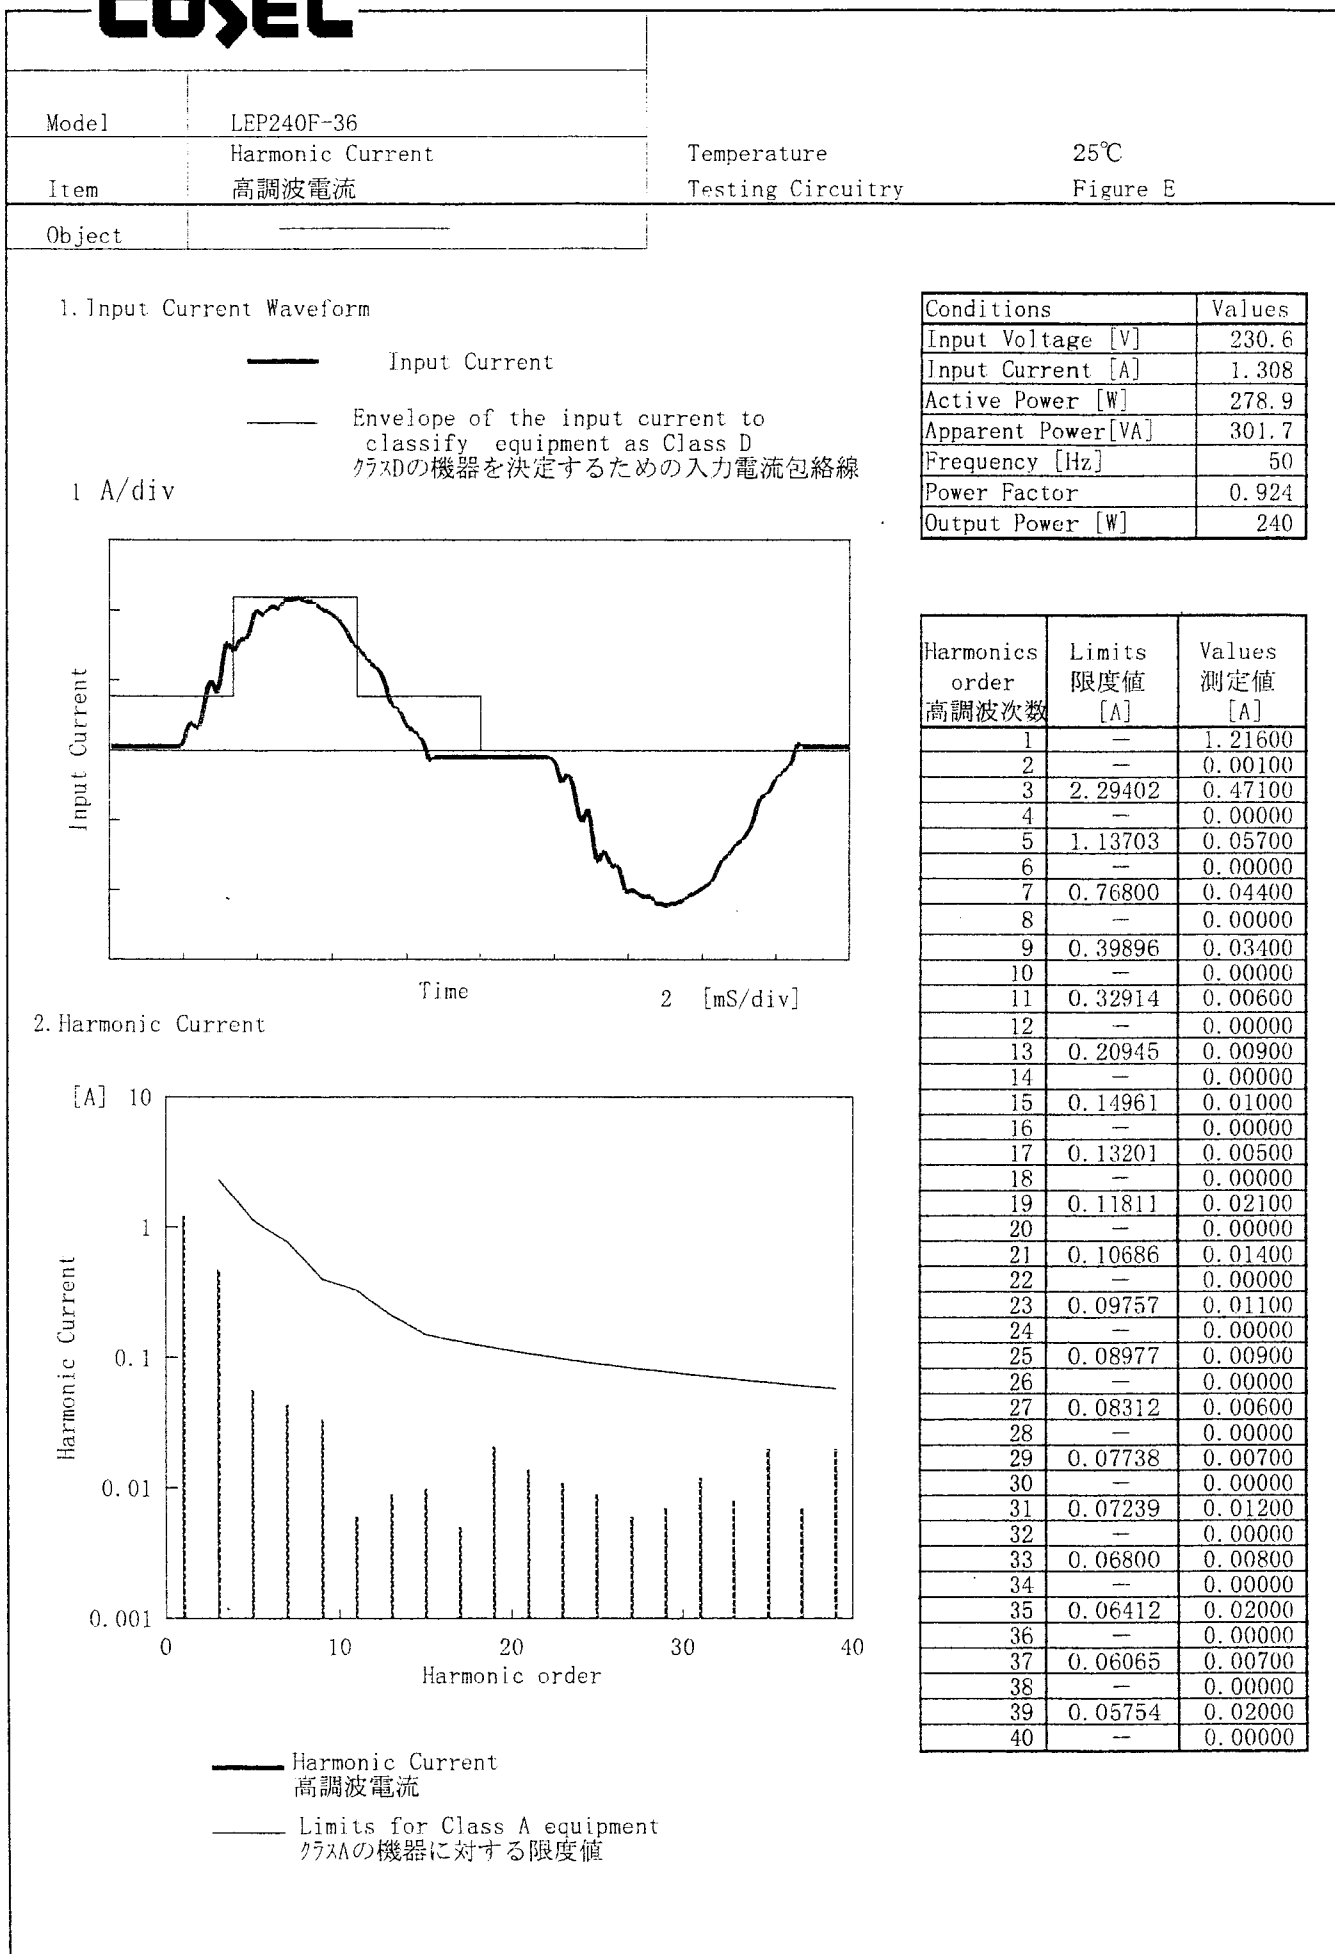


COSEL

Model	LEP240F-36	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object			


1. Input Current Waveform

— Input Current
— Envelope of the input current to classify equipment as Class D
クラスDの機器を決定するための入力電流包絡線

1 A/div

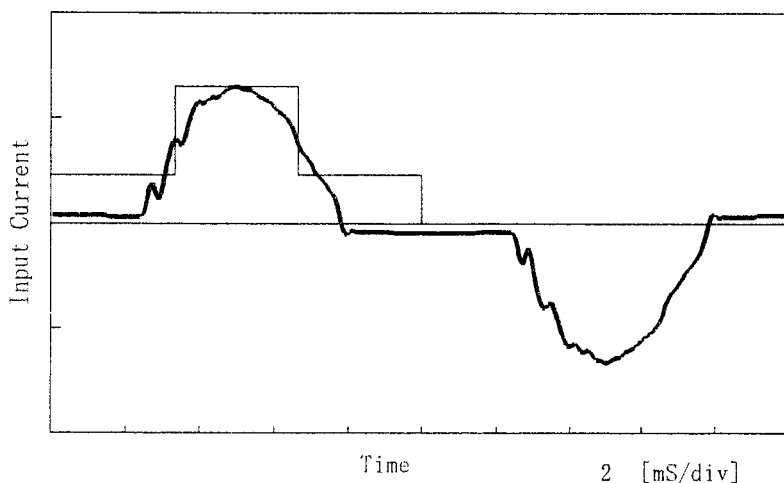

2. Harmonic Current

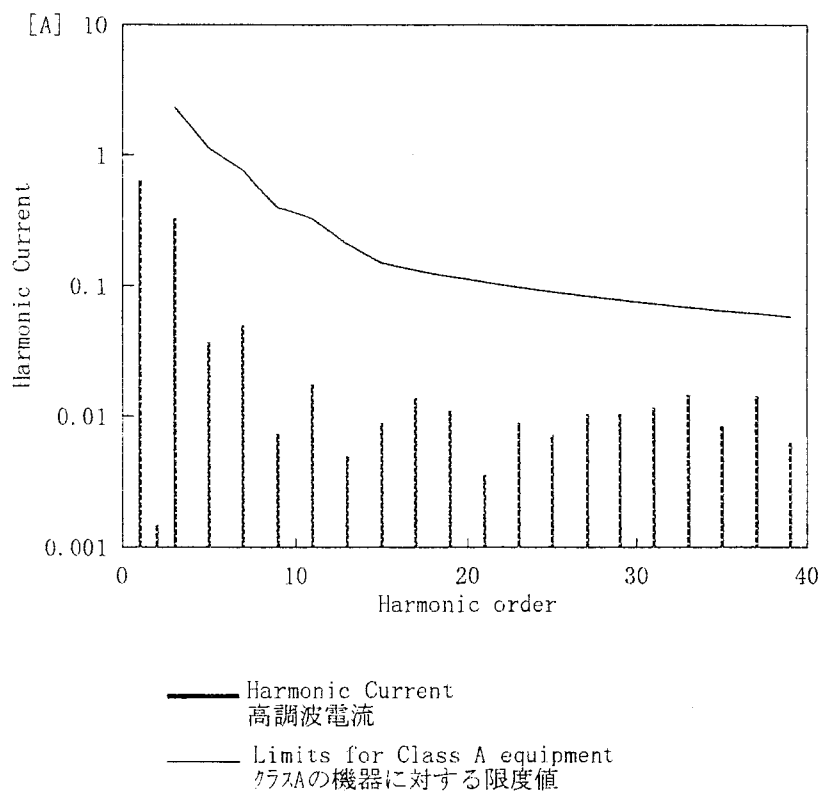

Conditions	Values
Input Voltage [V]	230.9
Input Current [A]	0.724
Active Power [W]	145.8
Apparent Power [VA]	167.3
Frequency [Hz]	50
Power Factor	0.871
Output Power [W]	120

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	0.63850
2	—	0.00150
3	2.29104	0.33250
4	—	0.00010
5	1.13556	0.03700
6	—	0.00030
7	0.76700	0.05020
8	—	0.00030
9	0.39844	0.00730
10	—	0.00030
11	0.32871	0.01760
12	—	0.00000
13	0.20918	0.00500
14	—	0.00030
15	0.14942	0.00900
16	—	0.00010
17	0.13184	0.01390
18	—	0.00000
19	0.11796	0.01110
20	—	0.00010
21	0.10673	0.00360
22	—	0.00030
23	0.09744	0.00900
24	—	0.00040
25	0.08965	0.00720
26	—	0.00010
27	0.08301	0.01040
28	—	0.00010
29	0.07728	0.01040
30	—	0.00040
31	0.07230	0.01160
32	—	0.00000
33	0.06792	0.01460
34	—	0.00010
35	0.06404	0.00840
36	—	0.00010
37	0.06057	0.01430
38	—	0.00000
39	0.05747	0.00630
40	—	0.00030


COSEL

Model	LEP240F-36	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object			


1. Input Current Waveform

— Input Current
— Envelope of the input current to classify equipment as Class D
クラスDの機器を決定するための入力電流包絡線

1 A/div

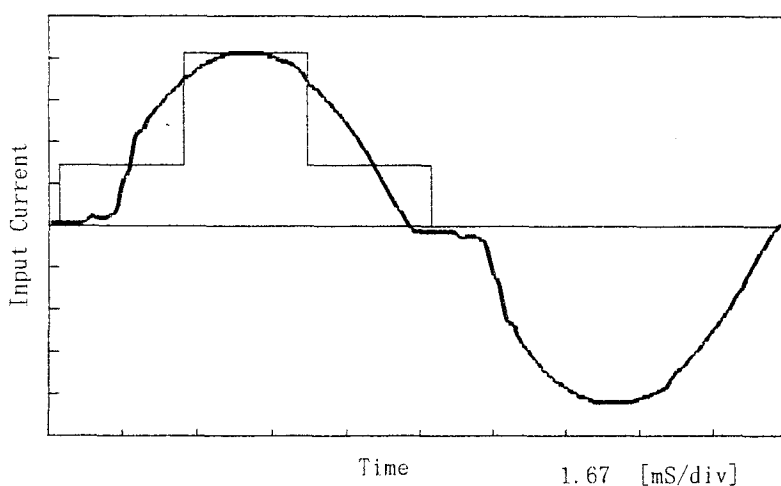

2. Harmonic Current

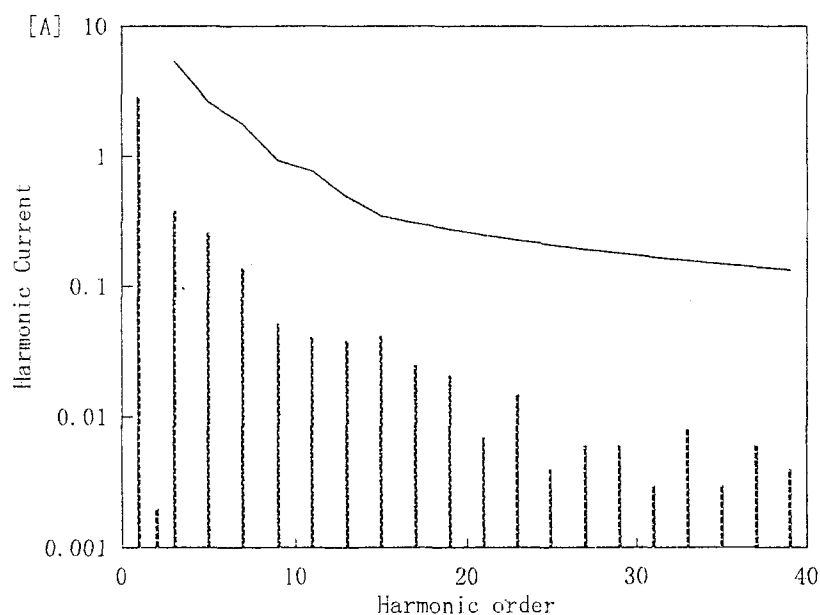

— Harmonic Current
高調波電流
— Limits for Class A equipment
クラスAの機器に対する限度値

Conditions	Values
Input Voltage [V]	99.2
Input Current [A]	2.942
Active Power [W]	287.4
Apparent Power [VA]	291.9
Frequency [Hz]	60
Power Factor	0.985
Output Power [W]	240

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	2.89900
2	—	0.00200
3	5.33266	0.38300
4	—	0.00100
5	2.64315	0.25900
6	—	0.00100
7	1.78528	0.13800
8	—	0.00100
9	0.92742	0.05200
10	—	0.00100
11	0.76512	0.04100
12	—	0.00100
13	0.48690	0.03900
14	—	0.00100
15	0.34778	0.04200
16	—	0.00000
17	0.30687	0.02500
18	—	0.00100
19	0.27456	0.02100
20	—	0.00100
21	0.24842	0.00700
22	—	0.00000
23	0.22681	0.01500
24	—	0.00100
25	0.20867	0.00400
26	—	0.00100
27	0.19321	0.00600
28	—	0.00100
29	0.17989	0.00600
30	—	0.00100
31	0.16828	0.00300
32	—	0.00100
33	0.15808	0.00800
34	—	0.00000
35	0.14905	0.00300
36	—	0.00000
37	0.14099	0.00600
38	—	0.00100
39	0.13376	0.00400
40	—	0.00000


COSEL

Model	LEP240F-36	Temperature	25°C
Item	Harmonic Current 高調波電流	Testing Circuitry	Figure E
Object	—		


1. Input Current Waveform

— Input Current
 — Envelope of the input current to classify equipment as Class D
 クラスDの機器を決定するための入力電流包絡線

1 A/div

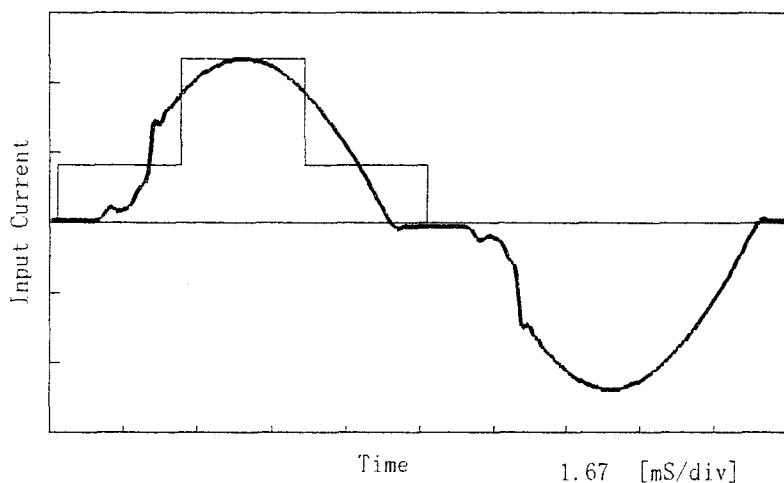

2. Harmonic Current

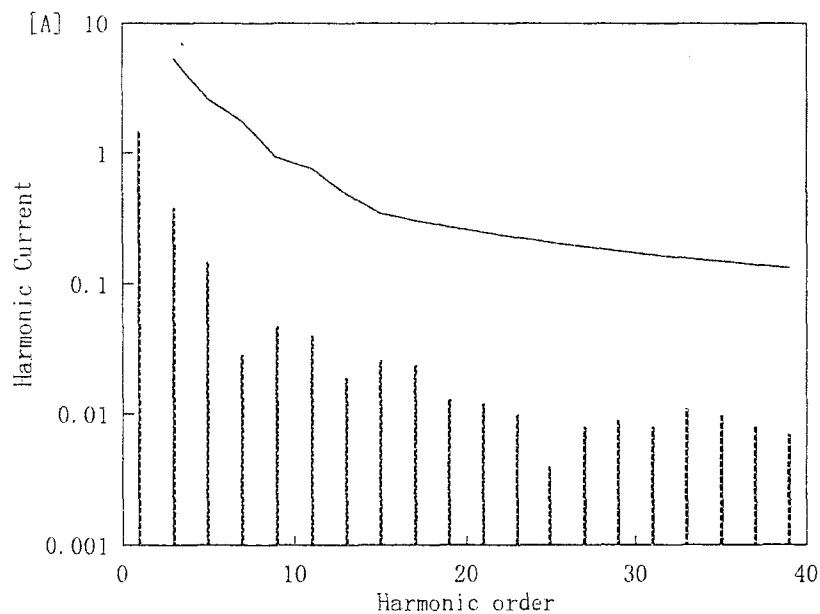

— Harmonic Current
 高調波電流
 — Limits for Class A equipment
 クラスAの機器に対する限度値

Conditions	Values
Input Voltage [V]	99.8
Input Current [A]	1.545
Active Power [W]	148.4
Apparent Power [VA]	154.3
Frequency [Hz]	60
Power Factor	0.962
Output Power [W]	120

Harmonics order 高調波次数	Limits 限度値 [A]	Values 測定値 [A]
1	—	1.48700
2	—	0.00100
3	5.30060	0.38100
4	—	0.00000
5	2.62725	0.14800
6	—	0.00000
7	1.77455	0.02900
8	—	0.00000
9	0.92184	0.04700
10	—	0.00000
11	0.76052	0.04000
12	—	0.00000
13	0.48397	0.01900
14	—	0.00000
15	0.34569	0.02600
16	—	0.00000
17	0.30502	0.02400
18	—	0.00000
19	0.27291	0.01300
20	—	0.00000
21	0.24692	0.01200
22	—	0.00000
23	0.22545	0.01000
24	—	0.00000
25	0.20741	0.00400
26	—	0.00000
27	0.19205	0.00800
28	—	0.00000
29	0.17881	0.00900
30	—	0.00000
31	0.16727	0.00800
32	—	0.00000
33	0.15713	0.01100
34	—	0.00000
35	0.14815	0.01000
36	—	0.00000
37	0.14015	0.00800
38	—	0.00000
39	0.13296	0.00700
40	—	0.00000

RADIATED EMISSION

Model Name : LEP240F-36

Model No. : -

Serial No. : -

Points : 2

Detector : PEAK/QP

Polarization : Hori. & Vert.

Limit: [EN 55022] Class B<3m>

Power Supply : 230V(1Phase) 50Hz


Temp. : 25deg C

Humi. : 45%

Date : 2002/9/9 23:39

Test Equip. : R3132,ESPC

Comment : Load100%(+36V 6.7A)

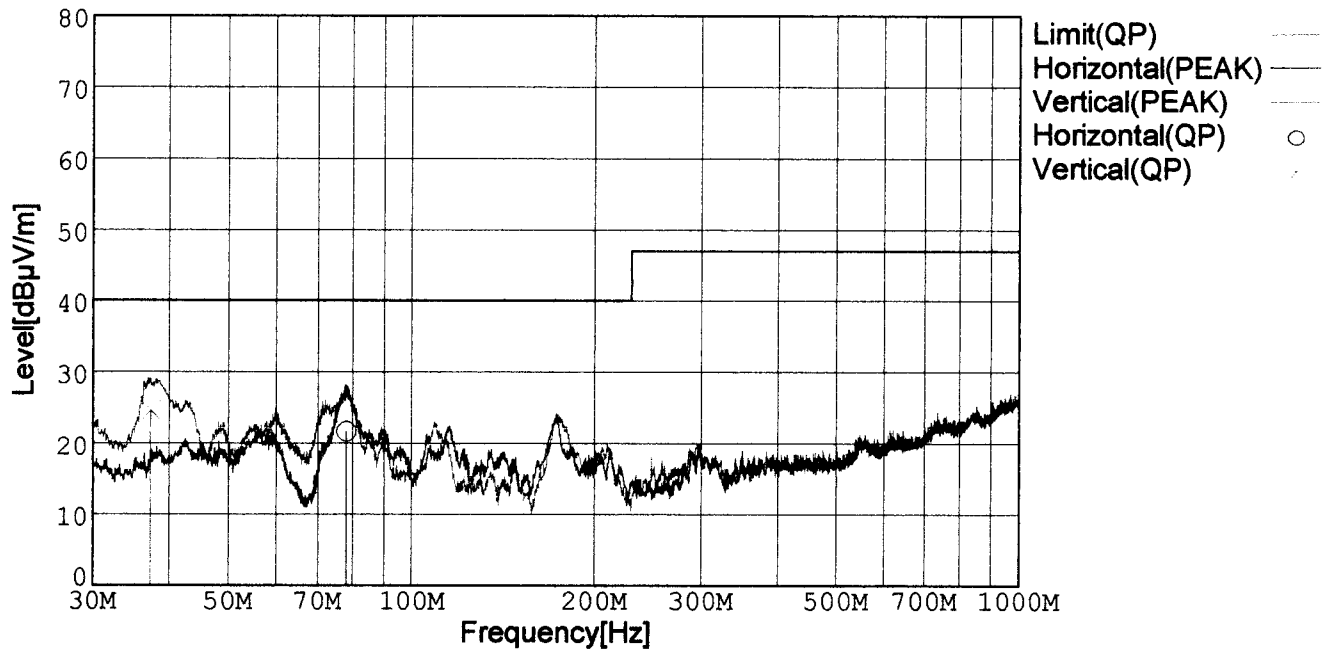

Frequency [MHz]	Meter Reading (QP) [dBμV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level (QP) [dBμV/m]	Angle[°]	Height [cm]	Polar.	Limit [dBμV/m]	Margin [dB]
78.282	46.5	BL	6.8	-31.7	21.6	329	147	Hori.	40.0	18.4
37.380	42.0	BL	14.5	-32.0	24.5	358	110	Vert.	40.0	15.5

BL: Biconi-Log



LINE CONDUCTION

Model Name : LEP240F-36

Model No. : -

Serial No. : -

Points : 7

Detector : PEAK/QP/Ave.

Line Mode : VA/VB

Limit1: [EN 55022] Class B(QP)

Limit2: [EN 55022] Class B(Ave.)

Power Supply : 230V(1Phase) 50Hz


Temp. : 25deg C

Humi. : 45%

Date : 2002/9/11 0:54

Test Equip. : R3132,ESPC

Comment : Load100%(+36V 6.7A)

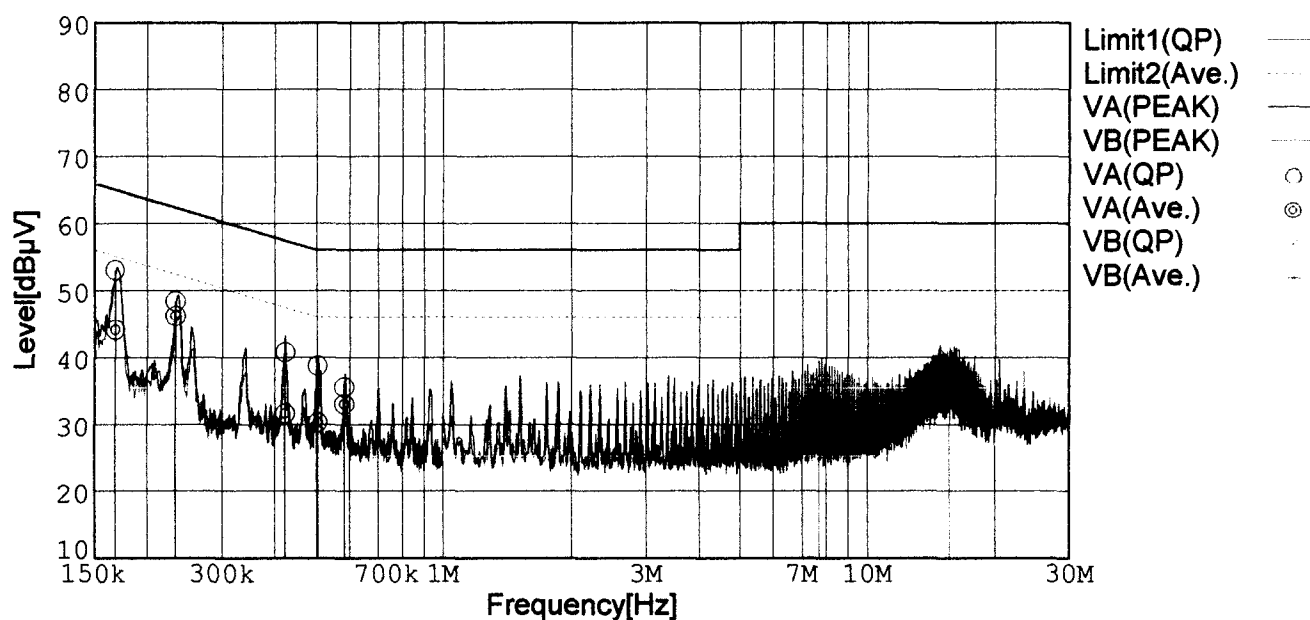

Frequency [MHz]	Meter Reading (QP) [dBμV]	Meter Reading (Ave.) [dBμV]	Factor [dB]	Level (QP) [dBμV]	Level (Ave.) [dBμV]	Line	Limit (QP) [dBμV]	Limit (Ave.) [dBμV]	Margin (QP) [dB]	Margin (Ave.) [dB]
0.1683	43.0	34.1	10.0	53.0	44.1	VA	65.1	55.1	12.1	11.0
0.2328	38.3	36.1	10.0	48.3	46.1	VA	62.4	52.4	14.1	6.3
0.4230	30.6	21.5	10.1	40.7	31.6	VA	57.4	47.4	16.7	15.8
0.5047	28.6	20.0	10.1	38.7	30.1	VA	56.0	46.0	17.3	15.9
0.5846	25.4	22.9	10.1	35.5	33.0	VA	56.0	46.0	20.5	13.0
7.7027	25.7	24.0	10.4	36.1	34.4	VB	60.0	50.0	23.9	15.6
15.6379	29.1	25.2	10.7	39.8	35.9	VB	60.0	50.0	20.2	14.1