



DATA SHEET		Date	25-Nov-10
Model	LFA100F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Arataki

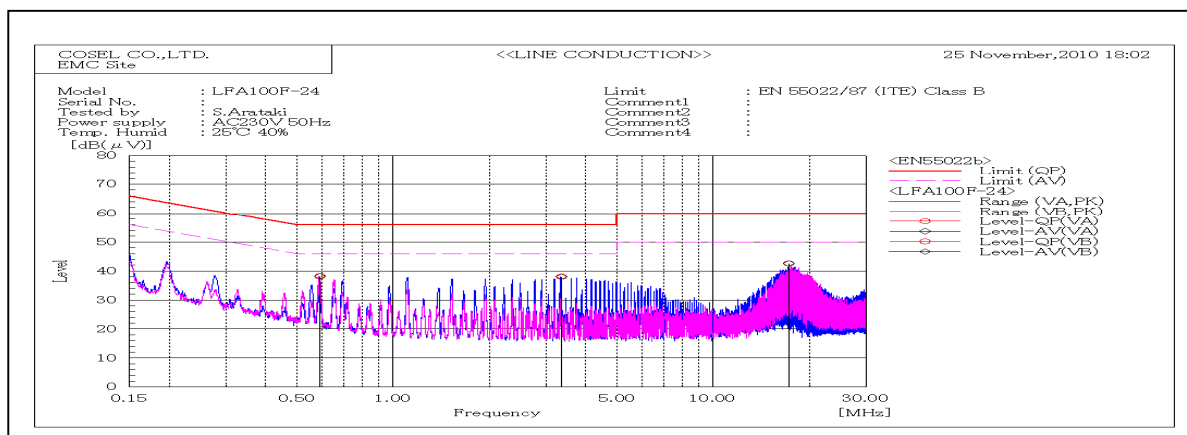

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.59116	VB	28.2	28.2	10	38.2	38.2	56	46	17.8	7.8	Pass	
3.35697	VA	27.8	27.8	10.3	38.1	38.1	56	46	17.9	7.9	Pass	
17.23205	VB	31.6	31.6	11	42.6	42.6	60	50	17.4	7.4	Pass	

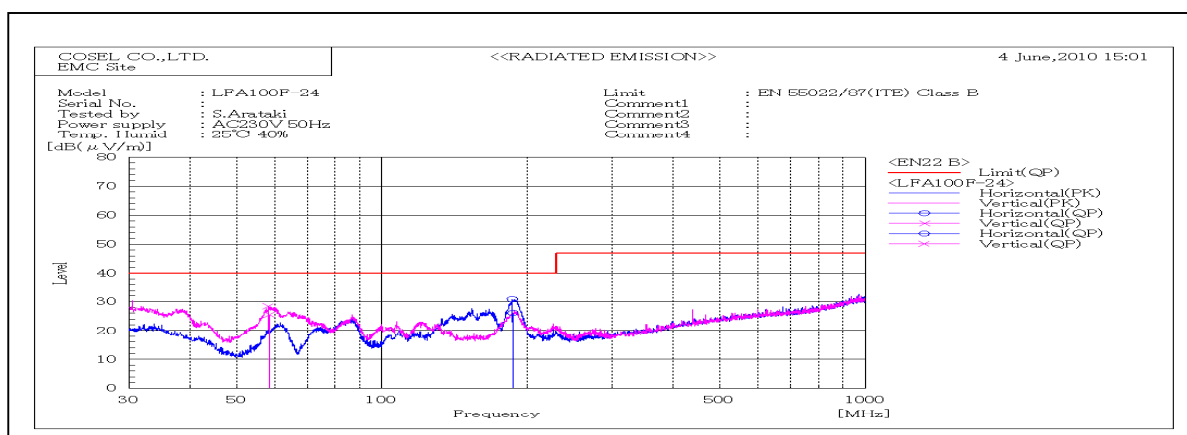


Frequency MHz	Polariz ation	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
58.4	V	47.9	-22.4	25.5	40	14.5	Pass	120	147	
186.58	H	44.2	-18.1	26.1	40	13.9	Pass	153	189	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

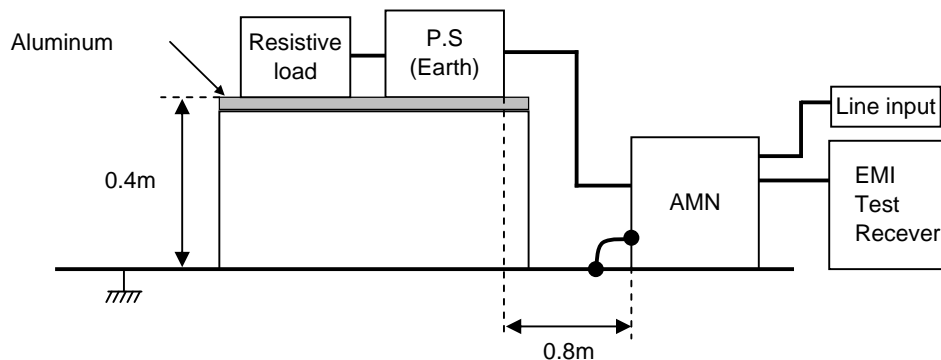

2. Radiated emission

