



DATA SHEET		Date	25-Nov-10
Model	LFA100F-5-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Arataki

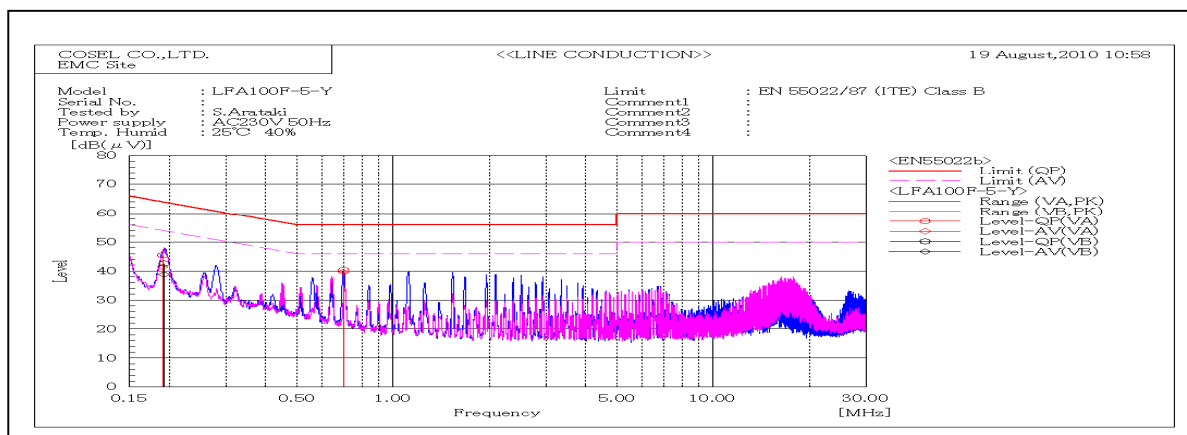

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.19304	VB	32.6	28.8	10	42.6	38.8	63.9	53.9	21.3	15.1	Pass	
0.19055	VA	35.4	31.4	10	45.4	41.4	64	54	18.6	12.6	Pass	
0.70025	VA	30.2	29.5	10.1	40.3	39.6	56	46	15.7	6.4	Pass	

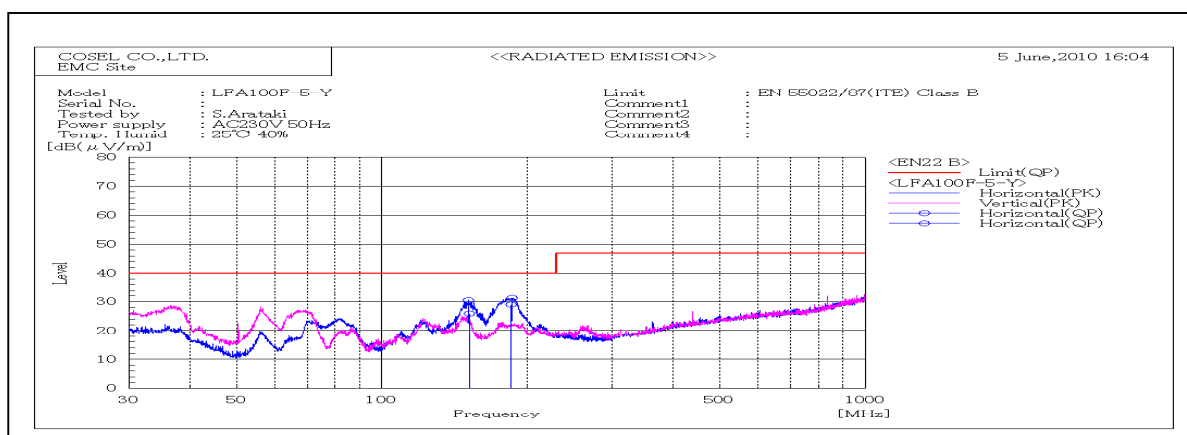

Frequency MHz	Polariz ation	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
151.756	H	42.2	-16.3	25.9	40	14.1	Pass	157	340	
185.048	H	47.1	-18.1	29	40	11	Pass	157	7	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

