



DATA SHEET		Date	10-Dec-10
Model	LFA240F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Imamura

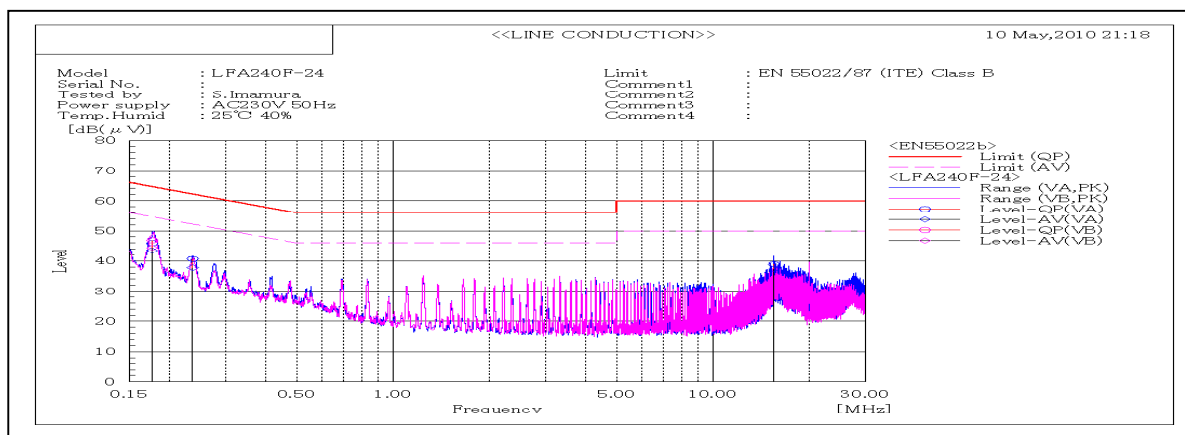

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.17671	VA	35.9	33.5	10	45.9	43.5	64.6	54.6	18.7	11.1	Pass	
0.23633	VA	30.7	27.7	10	40.7	37.7	62.2	52.2	21.5	14.5	Pass	
15.5202	VA	28.3	26.7	10.6	38.9	37.3	60	50	21.1	12.7	Pass	
0.1769	VB	36.9	34.4	10	46.9	44.4	64.6	54.6	17.7	10.2	Pass	

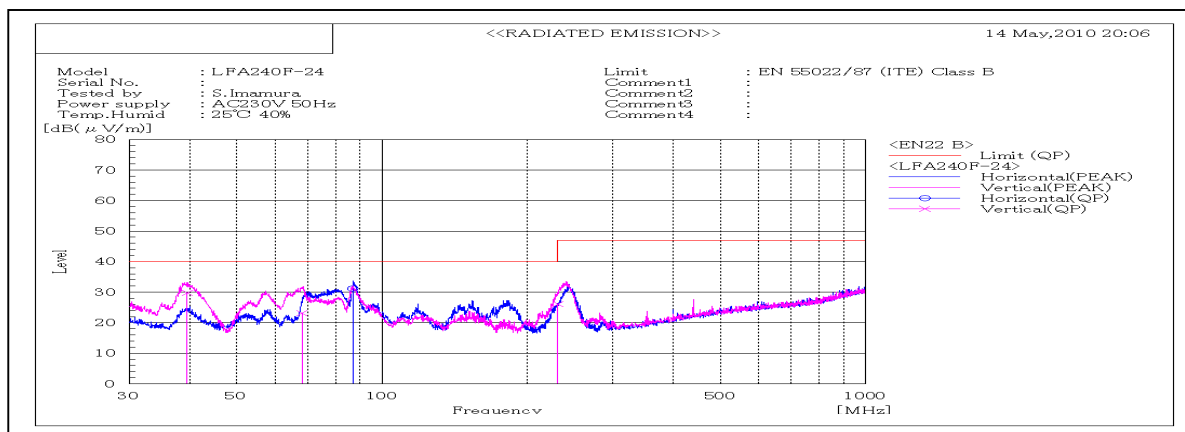

Frequency MHz	Polariz ation	Reading	Space Loss dB	Level	Limit	Margin	Pass/ Fail	Height cm	Angle deg	Remark
		dB(μV)		dB(mW)	dB(mW)	dB				
		QP		QP	QP	QP				
39.492	V	44.1	-14.3	29.8	40	10.2	Pass	110	98	
68.308	V	44.9	-21.7	23.2	40	16.8	Pass	126	1	
230.858	V	41.4	-15.4	26	47	21	Pass	108	260	
86.867	H	50.5	-19.3	31.2	40	8.8	Pass	154	199	

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction



2. Radiated emission

