



DATA SHEET		Date	10-Dec-10
Model	LFA240F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Imamura

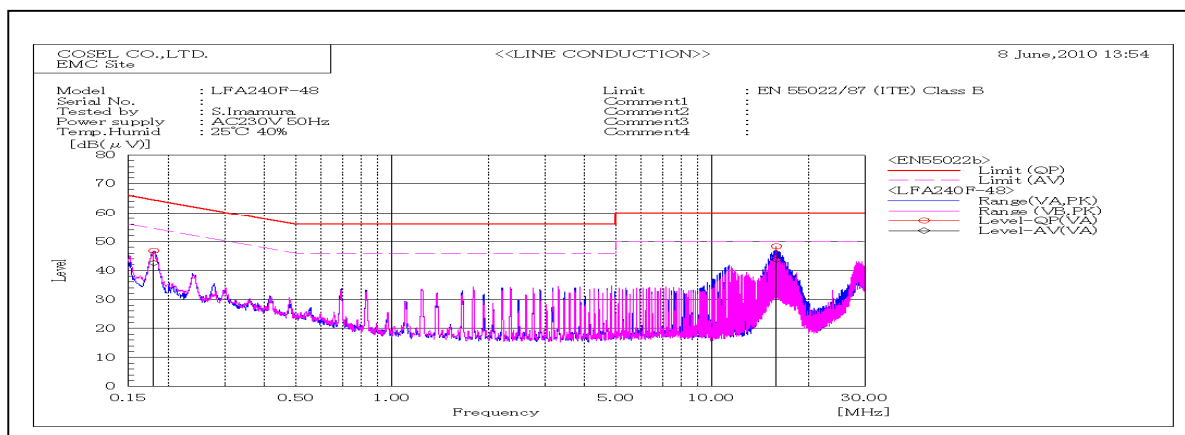

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.18005	VA	36.6	32.4	10.2	46.8	42.6	64.5	54.5	17.7	11.9	Pass	
15.9105	VA	37.7	33.1	10.6	48.3	43.7	60	50	11.7	6.3	Pass	

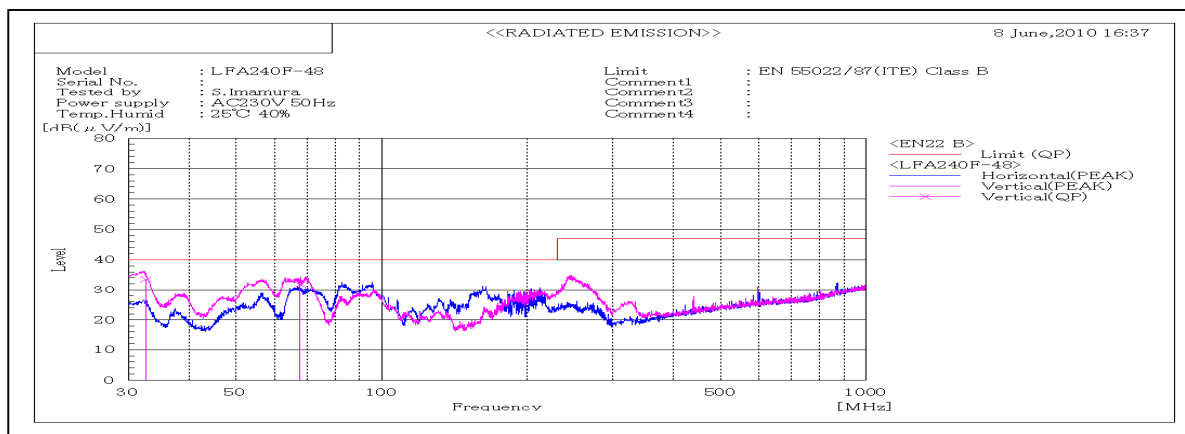

Frequency MHz	Polariz ation	Reading	Space Loss dB	Level	Limit	Margin	Pass/ Fail	Height cm	Angle deg	Remark
		dB(μV)		dB(mW)	dB(mW)	dB				
		QP		QP	QP	QP				
32.516	V	44.4	-10.9	33.5	40	6.5	Pass	106	120	
67.79	V	53.6	-21.8	31.8	40	8.2	Pass	150	264	

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

