



DATA SHEET		Date	28-Dec-10
Model	LFA300F-5-TY	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Akasofu

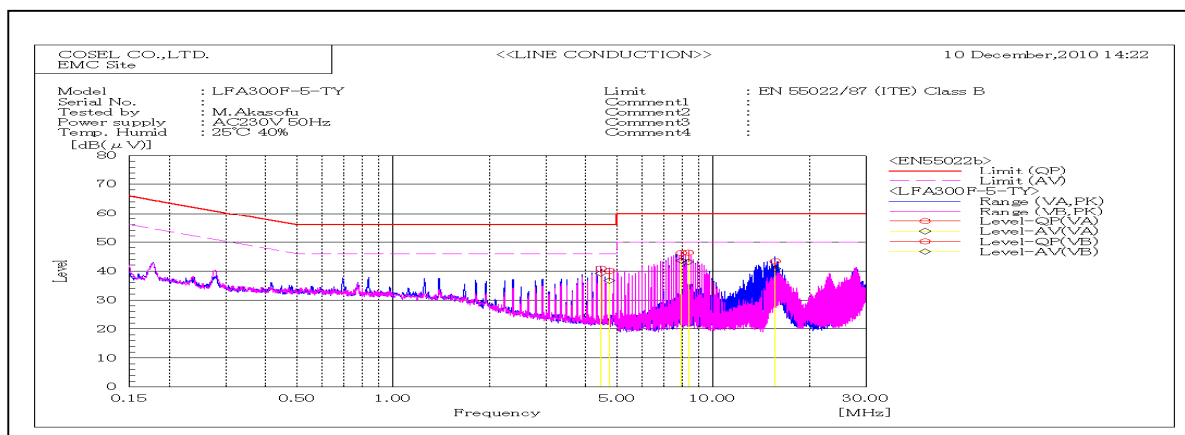

Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
4.46428	VA	30.5	28.9	10.3	40.8	39.2	56	46	15.2	6.8	Pass	
4.74526	VB	29.8	26.3	10.3	40.1	36.6	56	46	15.9	9.4	Pass	
7.95317	VA	35.7	33.1	10.5	46.2	43.6	60	50	13.8	6.4	Pass	
8.37028	VB	35.8	32.6	10.5	46.3	43.1	60	50	13.7	6.9	Pass	
15.6298	VA	32.6	30	10.8	43.4	40.8	60	50	16.6	9.2	Pass	

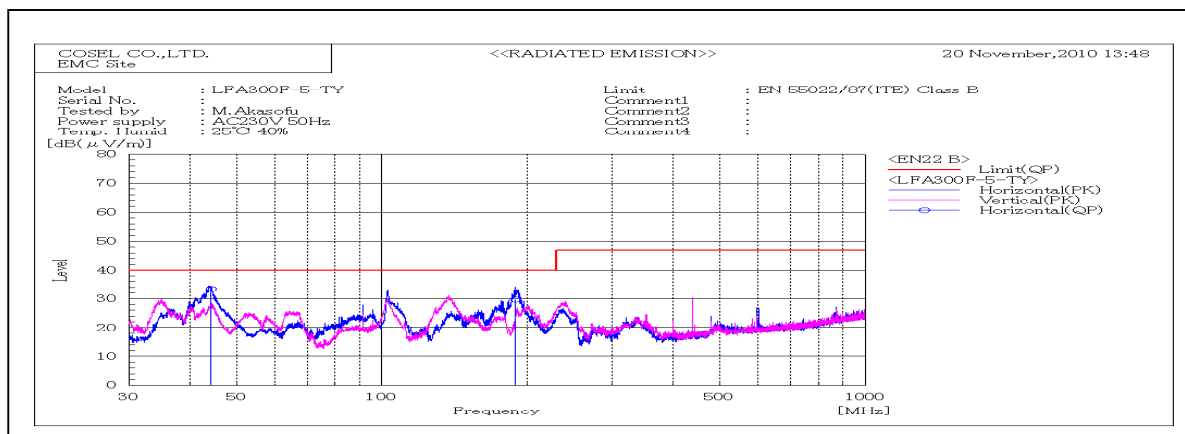

Frequency MHz	Polariz ation	Stability	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
44.313	H	Stable	50.5	-17.1	33.4	40	6.6	Pass	100	304	
189.074	H	Stable	47.9	-18.2	29.7	40	10.3	Pass	157	100	

## DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

### 1. Line conduction



### 2. Radiated emission

