



DATA SHEET

Date		04-Aug-09	
Model	LFA75F-3R3-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	S.IMAMURA

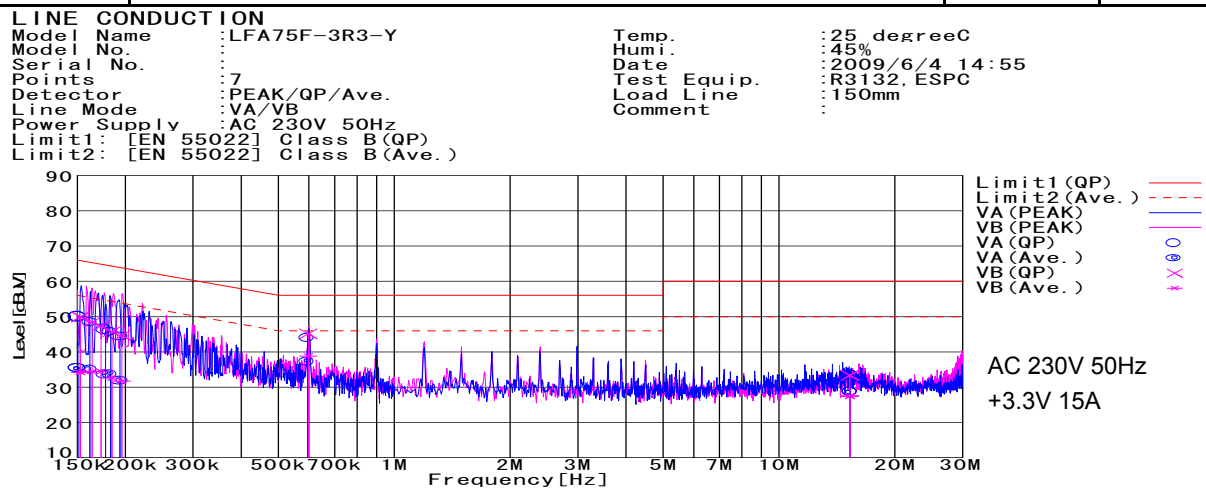

Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1503	25.3	40	10	35.3	50	VA	56	66	20.7	16
0.1619	24.9	38.4	10	34.9	48.4	VA	55.4	65.4	20.5	17
0.1776	23.6	36.3	10	33.6	46.3	VA	54.6	64.6	21	18.3
0.1833	23.7	35.8	10	33.7	45.8	VA	54.3	64.3	20.6	18.5
0.1937	21.8	34.4	10	31.8	44.4	VA	53.9	63.9	22.1	19.5
0.5969	27.2	33.9	10.1	37.3	44	VA	46	56	8.7	12
15.2719	16.8	22.6	10.7	17.5	33.3	VB	50	60	22.5	26.7

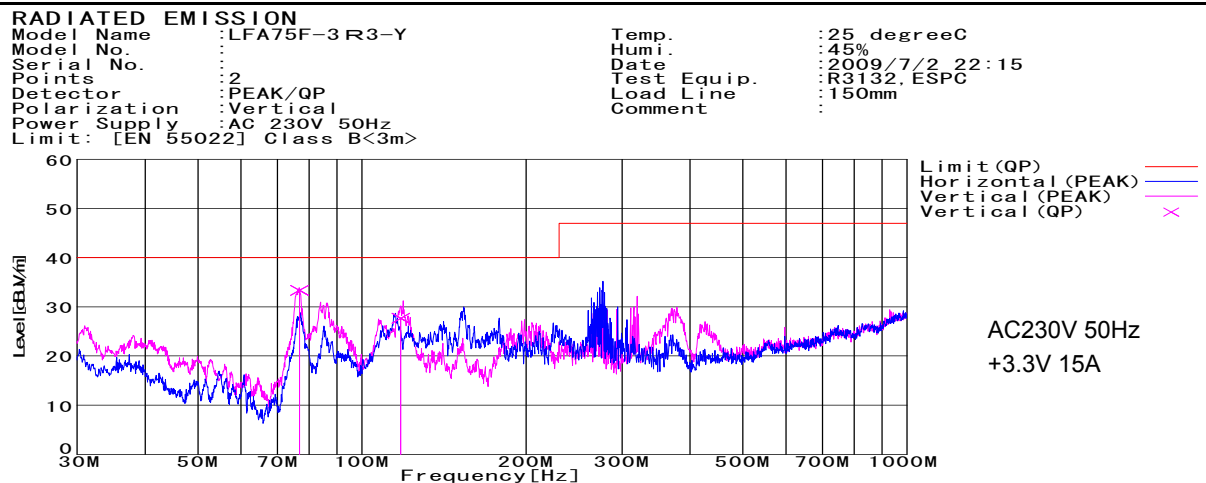


Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
76.801	58.7	BL	6.6	-31.9	33.4	138	148	Vert.	40	6.6
117.849	48.5	BL	10.9	-31.7	27.7	0	117	Vert.	40	12.3

DATA SHEET

Model	Circuit used for measurement
Test	EMI Line conduction & Radiated emission

1. Line conduction

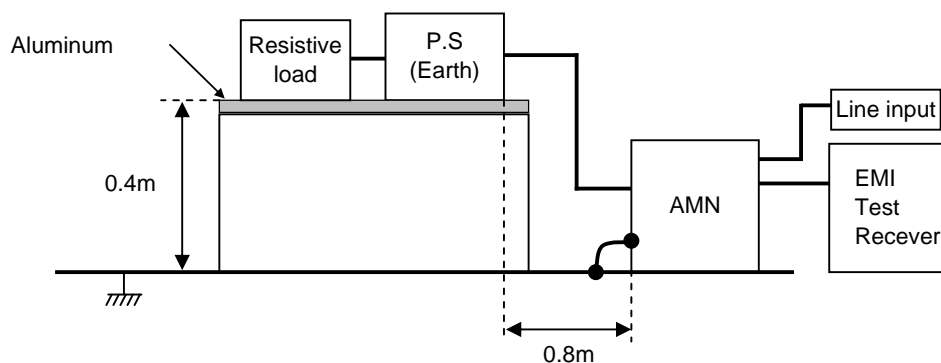

2. Radiated emission

