


DATA SHEET		Date	05-Nov-09
Model	LGA50A-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Oyama

LINE CONDUCTION

Model Name : LGA50A-15
 Model No. :
 Serial No. :
 Points : 3
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC100V 60Hz
 Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

Temp. : 25 degreeC
 Humi. : 40%
 Date : 2009/11/5 15:50
 Test Equip. : R3132.ESPC
 Load Line : 100mm
 Comment :

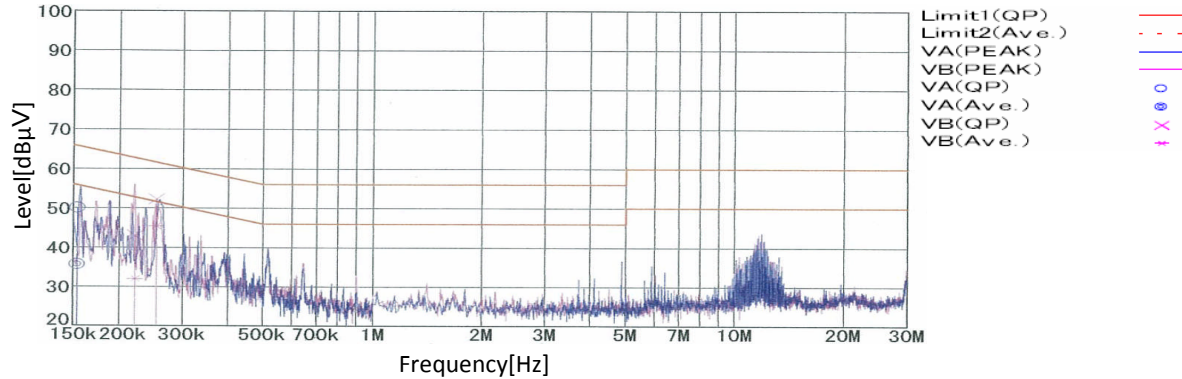


Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1535	25.8	40.2	9.8	35.6	50.0	VA	55.8	65.8	20.2	15.8
0.2216	22.1	33.2	9.8	31.9	43.0	VB	52.8	62.8	20.9	19.8
0.2540	35.6	42.5	9.8	45.4	52.3	VB	51.6	61.6	6.2	9.3

RADIATED EMISSION

Model Name : LGA50A-15
 Model No. :
 Serial No. :
 Points : 3
 Detector : PEAK/QP
 Line Mode : Hori. & Vert.
 Power Supply : AC100V 60Hz
 Limit1: [EN 55022] Class B<3m>


Temp. : 25 degreeC
 Humi. : 40%
 Date : 2009/8/26 16:13
 Test Equip. : R3132.ESPC
 Load Line : 100mm
 Comment :

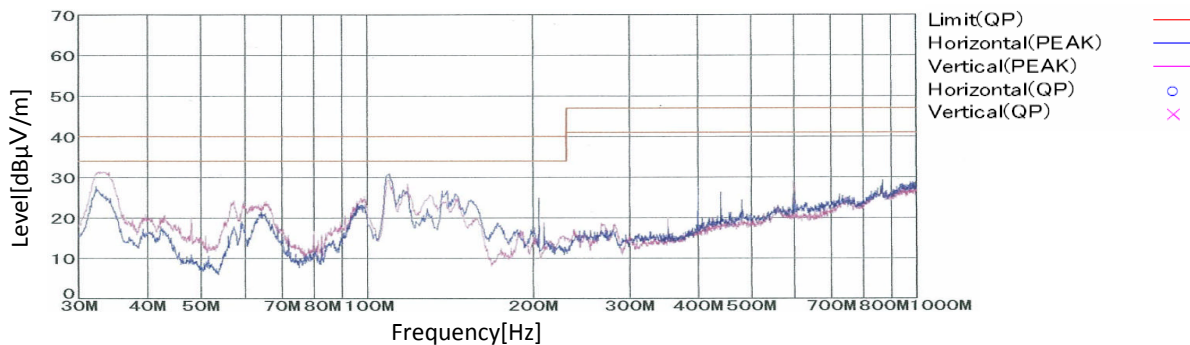

Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
33.2200	43.7	BL	16.3	-28.5	31.5	100	Vert.	40	8.5
109.6000	44.1	BL	10.5	-23.7	30.9	100	Hori.	40	9.1
118.4000	44.2	BL	10.9	-26.7	28.4	100	Vert.	40	11.6

DATA SHEET		Date	05-Nov-09
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Oyama

1. Line conduction

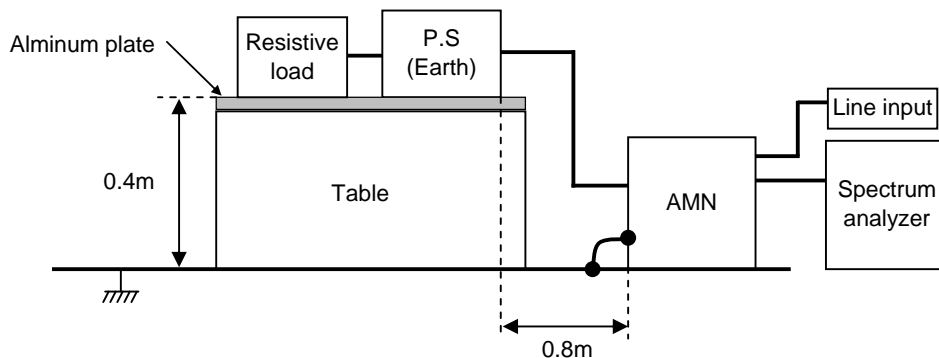

2. Radiated emission

