


DATA SHEET		Date	05-Nov-09
Model	LGA75A-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Oyama

LINE CONDUCTION

Model Name : LGA75A-15
 Model No. :
 Serial No. :
 Points : 4
 Detector : PEAK/QP/Ave.
 Line Mode : VA/VB
 Power Supply : AC100V 60Hz
 Limit1: [EN 55022] Class B(QP)
 Limit2: [EN 55022] Class B(Ave.)

Temp. : 25 degreeC
 Humi. : 40%
 Date : 2009/11/5 13:25
 Test Equip. : R3132.ESPC
 Load Line : 100mm
 Comment :

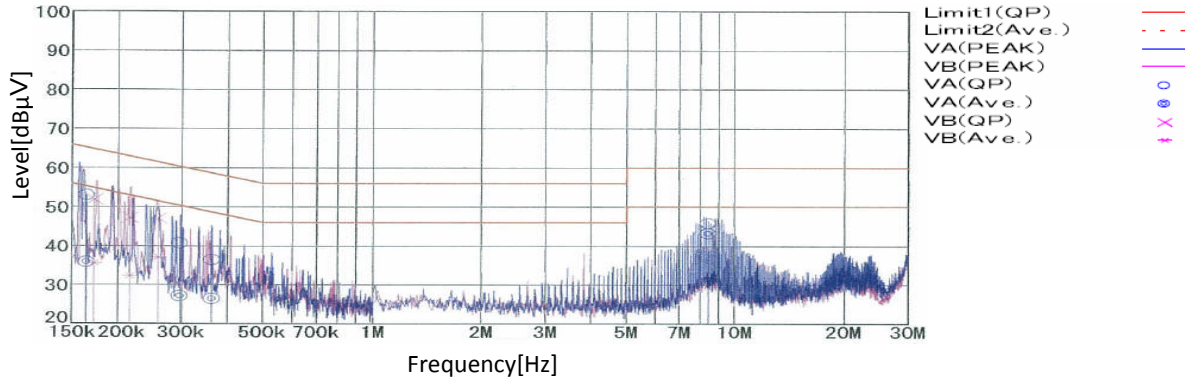


Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1641	26.0	43.2	9.8	35.8	53.0	VA	55.3	65.3	19.5	12.3
0.2970	17.3	30.9	9.8	27.1	40.7	VA	48.7	58.7	23.2	19.6
8.4341	33.1	35.7	10.1	43.2	45.8	VA	50.0	60.0	6.8	14.2
0.2591	27.2	37.2	9.8	37.0	47.0	VB	51.5	61.5	14.5	14.5

RADIATED EMISSION

Model Name : LGA75A-15
 Model No. :
 Serial No. :
 Points : 2
 Detector : PEAK/QP
 Line Mode : Hori. & Vert.
 Power Supply : AC100V 60Hz
 Limit1: [EN 55022] Class B<3m>


Temp. : 25 degreeC
 Humi. : 40%
 Date : 2009/11/5 13:45
 Test Equip. : R3132.ESPC
 Load Line : 100mm
 Comment :

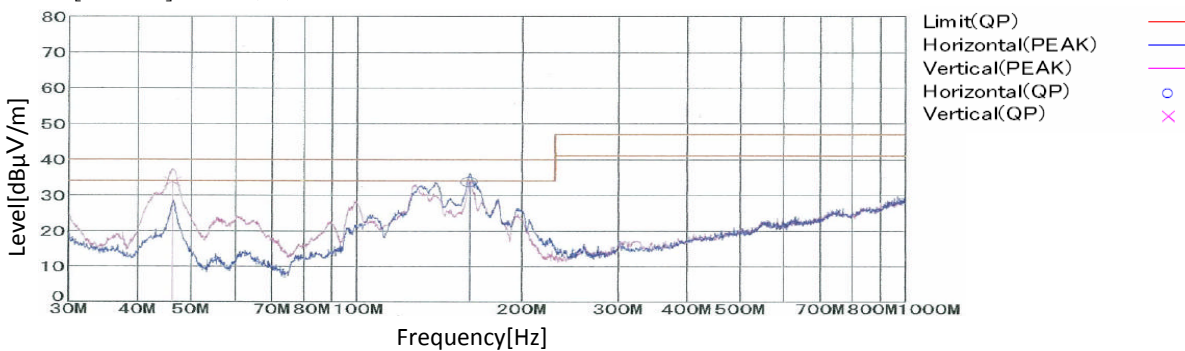

Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
160.8260	55.3	BL	9.8	-31.5	33.6	328	160	Hori.	40	6.4
46.1210	56.2	BL	9.8	-32.1	33.7	86	104	Vert.	40	6.3

DATA SHEET		Date	05-Nov-09
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Oyama

1. Line conduction

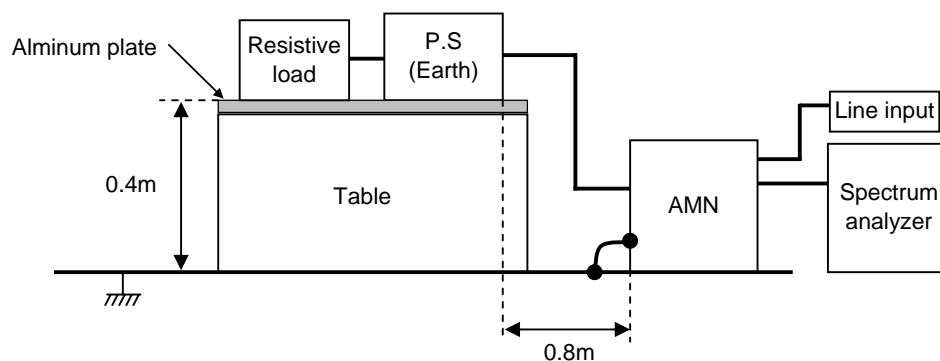

2. Radiated emission

