


DATA SHEET		Date	20-Oct-09
Model	LGA75A-3R3-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Oyama

#### LINE CONDUCTION

Model Name : LGA75A-3R3-Y  
Model No. :  
Serial No. :  
Points : 3  
Detector : PEAK/QP/Ave.  
Line Mode : VA/VB  
Power Supply : AC100V 60Hz  
Limit1: [EN 55022] Class B(QP)  
Limit2: [EN 55022] Class B(Ave.)

Temp. : 25 degreeC  
Humi. : 40%  
Date : 2009/8/25 15:44  
Test Equip. : R3132.ESPC  
Load Line : 100mm  
Comment :

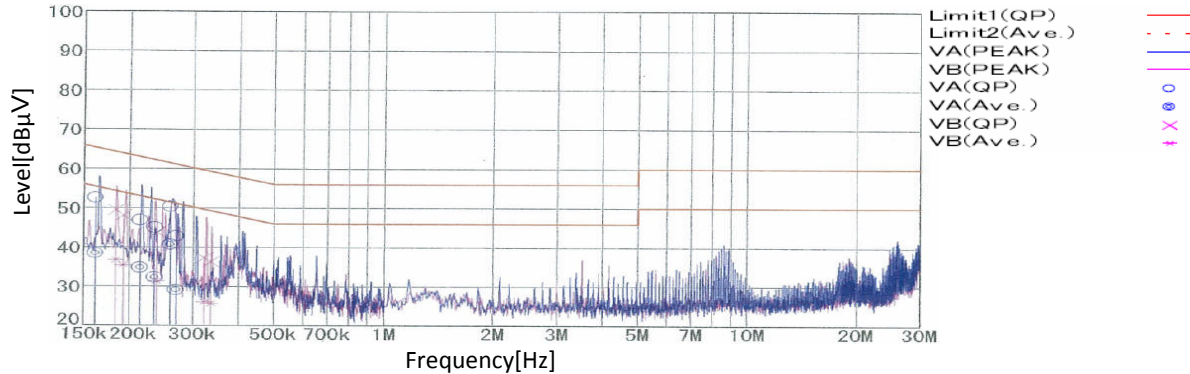


Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.1611	28.6	42.8	9.8	38.4	52.6	VA	55.4	65.4	17.0	12.8
0.2596	30.9	40.5	9.8	40.7	50.3	VA	51.5	61.5	10.8	11.2
0.1838	26.9	39.7	9.8	36.7	49.5	VB	54.3	64.3	17.6	14.8

#### RADIATED EMISSION

Model Name : LGA75A-3R3-Y  
Model No. :  
Serial No. :  
Points : 1  
Detector : PEAK/QP  
Line Mode : Hori. & Vert.  
Power Supply : AC100V 60Hz  
Limit1: [EN 55022] Class B<3m>


Temp. : 25 degreeC  
Humi. : 40%  
Date : 2009/10/20 20:24  
Test Equip. : R3132.ESPC  
Load Line : 100mm  
Comment :

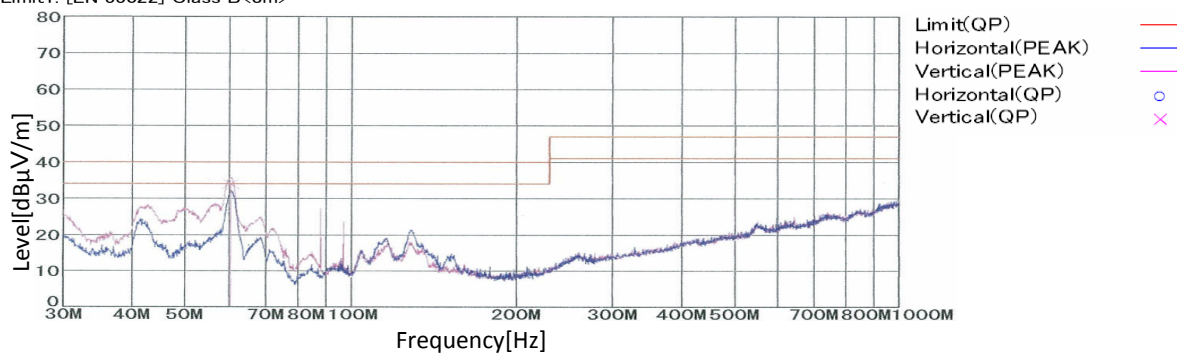

Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
60.3660	61.3	BL	4.7	-32.0	34.0	143	160	Vert.	40	6.0

DATA SHEET		Date	20-Oct-09
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Oyama

1. Line conduction

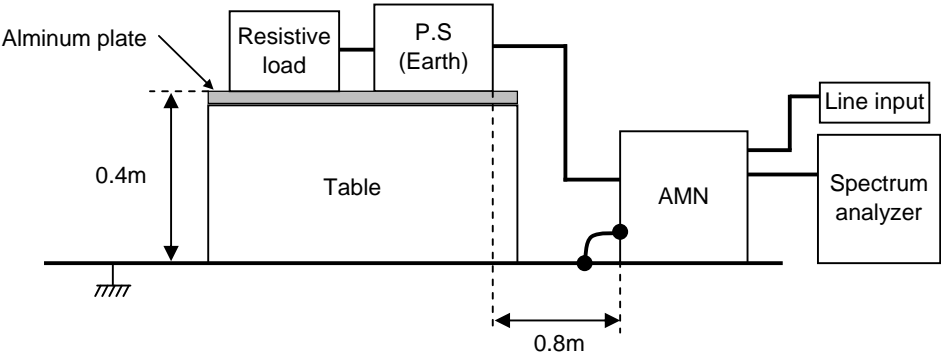

2. Radiated emission

