


DATA SHEET		Date	17-Nov-10
Model	LGA75A-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Saitou

LINE CONDUCTION

Model Name : LGA75A-48
Model No. :
Serial No. :
Points : 4
Detector : PEAK/QP/Ave.
Line Mode : VA/VB
Power Supply : AC100V 60Hz
Limit1: [EN 55022] Class B(QP)
Limit2: [EN 55022] Class B(Ave.)

Temp. : 25 degreeC
Humi. : 40%
Date : 2011/11/16 20:59
Test Equip. : R3132.ESPC
Load Line : 100mm
Comment :

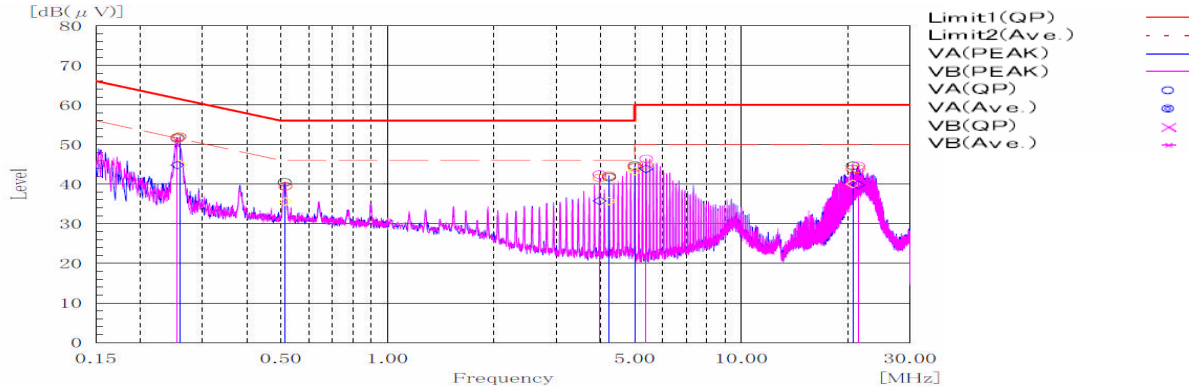


Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.2548	34.7	41.4	10.1	44.8	51.5	VB	51.6	61.6	6.8	10.1
0.2584	34.9	41.9	10.1	45.0	52.0	VA	51.5	61.5	6.5	9.5
5.0032	32.8	33.7	10.5	43.3	44.2	VA	50.0	60.0	6.7	15.8
5.3862	33.3	34.4	10.5	43.8	44.9	VB	50.0	60.0	6.2	15.1

RADIATED EMISSION

Model Name : LGA75A-48
Model No. :
Serial No. :
Points : 3
Detector : PEAK/QP
Line Mode : Hori. & Vert.
Power Supply : AC100V 60Hz
Limit1: [EN 55022] Class B<3m>


Temp. : 25 degreeC
Humi. : 40%
Date : 2010/11/17 12:57
Test Equip. : R3132.ESPC
Load Line : 100mm
Comment :

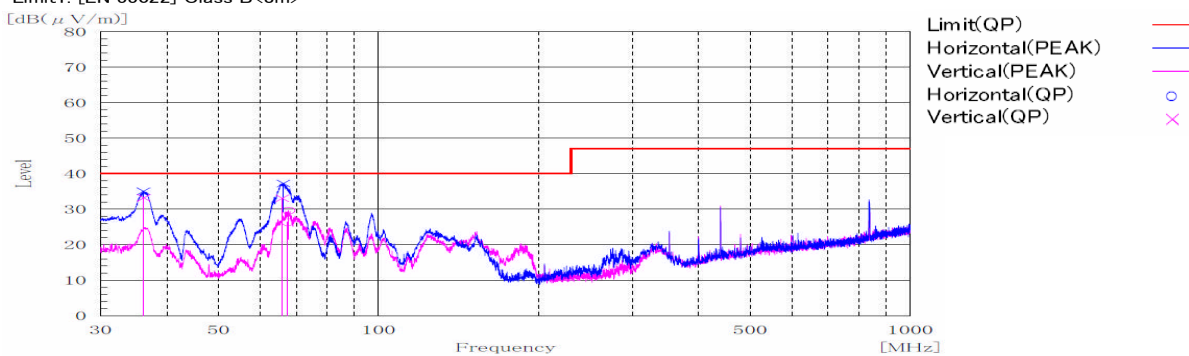

Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
36.199	46.1	BL	-12.9	33.2	86	127	Vert.	40	6.8
65.924	55.3	BL	-22.2	33.1	173	118	Vert.	40	6.9
67.531	48.4	BL	-22.0	26.4	254	114	Hori.	40	13.6

DATA SHEET		Date	17-Nov-10
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Saitou

1. Line conduction

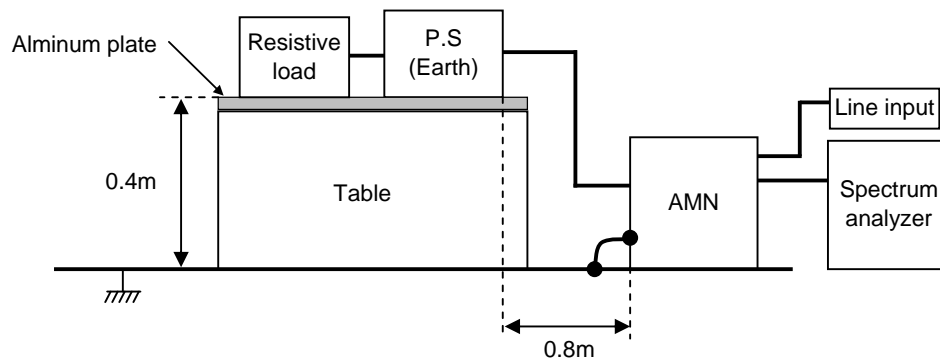

2. Radiated emission

