



DATA SHEET		Date	09-Oct-19
Model	LHA100F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

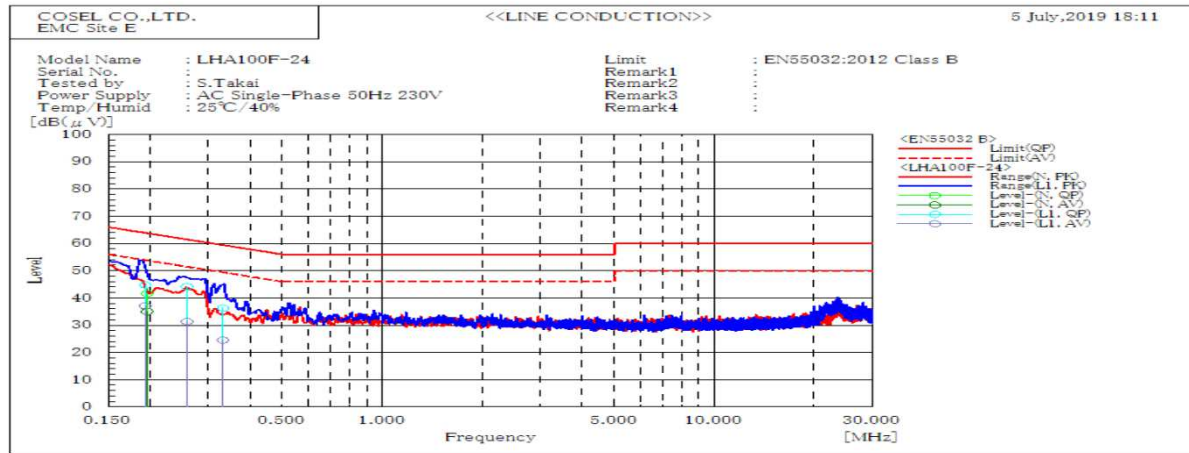


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.194	L1	44.7	37.1	63.9	53.9	19.2	16.8	Pass	
0.259	L1	44.2	31.3	61.5	51.5	17.3	20.2	Pass	
0.331	L1	36.3	24.5	59.4	49.4	23.1	24.9	Pass	
0.196	N	41.7	35	63.8	53.8	22.1	18.8	Pass	

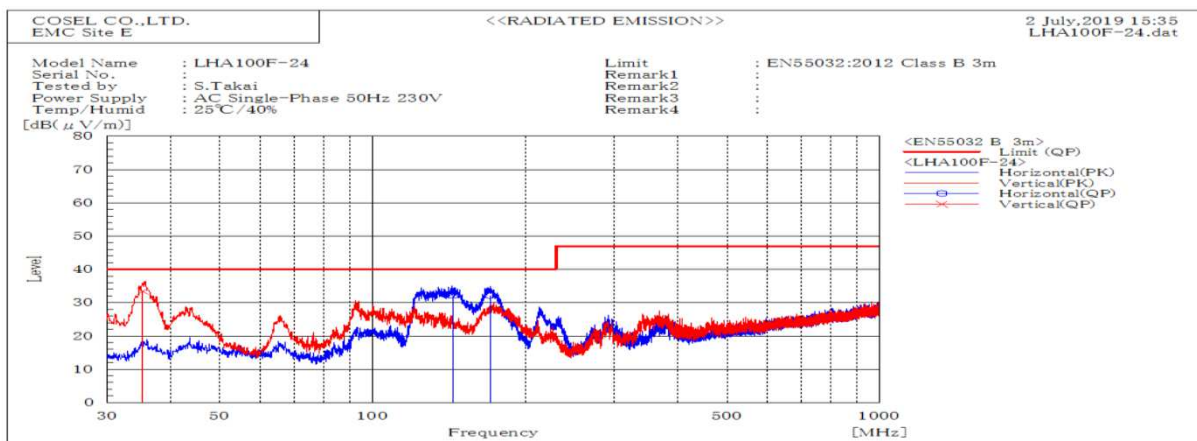


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
35.257	V	Stable	33.5	40	6.5	Pass	100.2	69.8		
170.489	H	Stable	32.1	40	7.9	Pass	196.2	10.2		
144.115	H	Stable	32.2	40	7.8	Pass	199.7	14		

DATA SHEET		Date	09-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

## 1. Line conduction

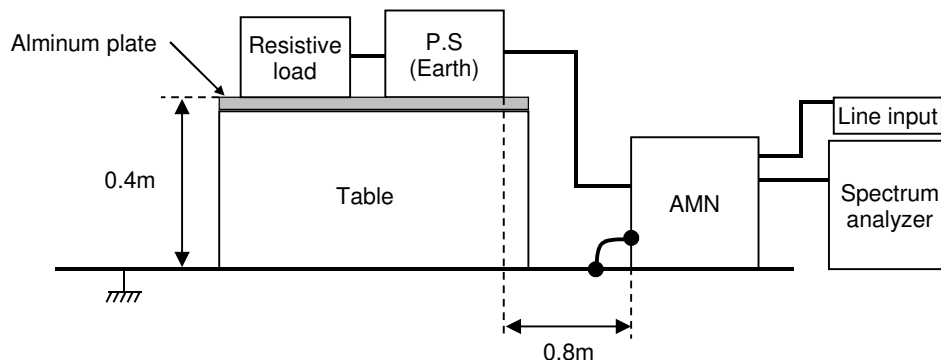

## 2. Radiated emission

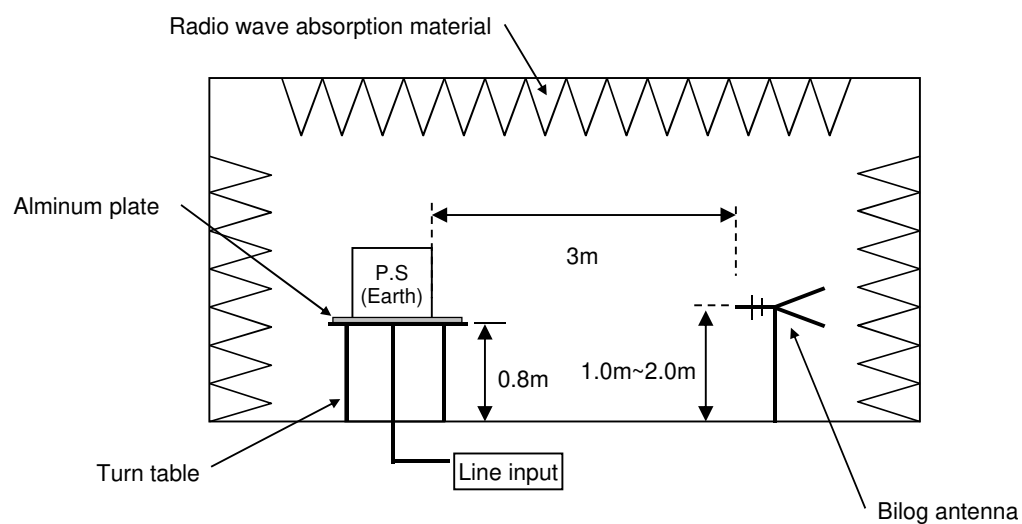

## Conditions

Test : EMI  
Model Name : LHA100F-24

## Photographs of test set-up

### 1.LINE CONDUCTION



### 2.RADIATED EMISSION

