



## ***EXTRA TEST DATA OF LHA100F-24***


*Regulated DC Power Supply  
Mar 20, 2021*

**COSEL CO.,LTD.**

## CONTENTS

1.Inrush Current (enlargement) . . . . .	1
2.Dynamic Line Regulation . . . . .	2
3.Overtoltage Protection (waveform) . . . . .	3
4.Hiccup cycle (by Overcurrent Protection) . . . . .	4
5.Power Consumption (by Input Voltage) . . . . .	5
6.Figure of Testing Circuitry . . . . .	6

(Final Page 6)

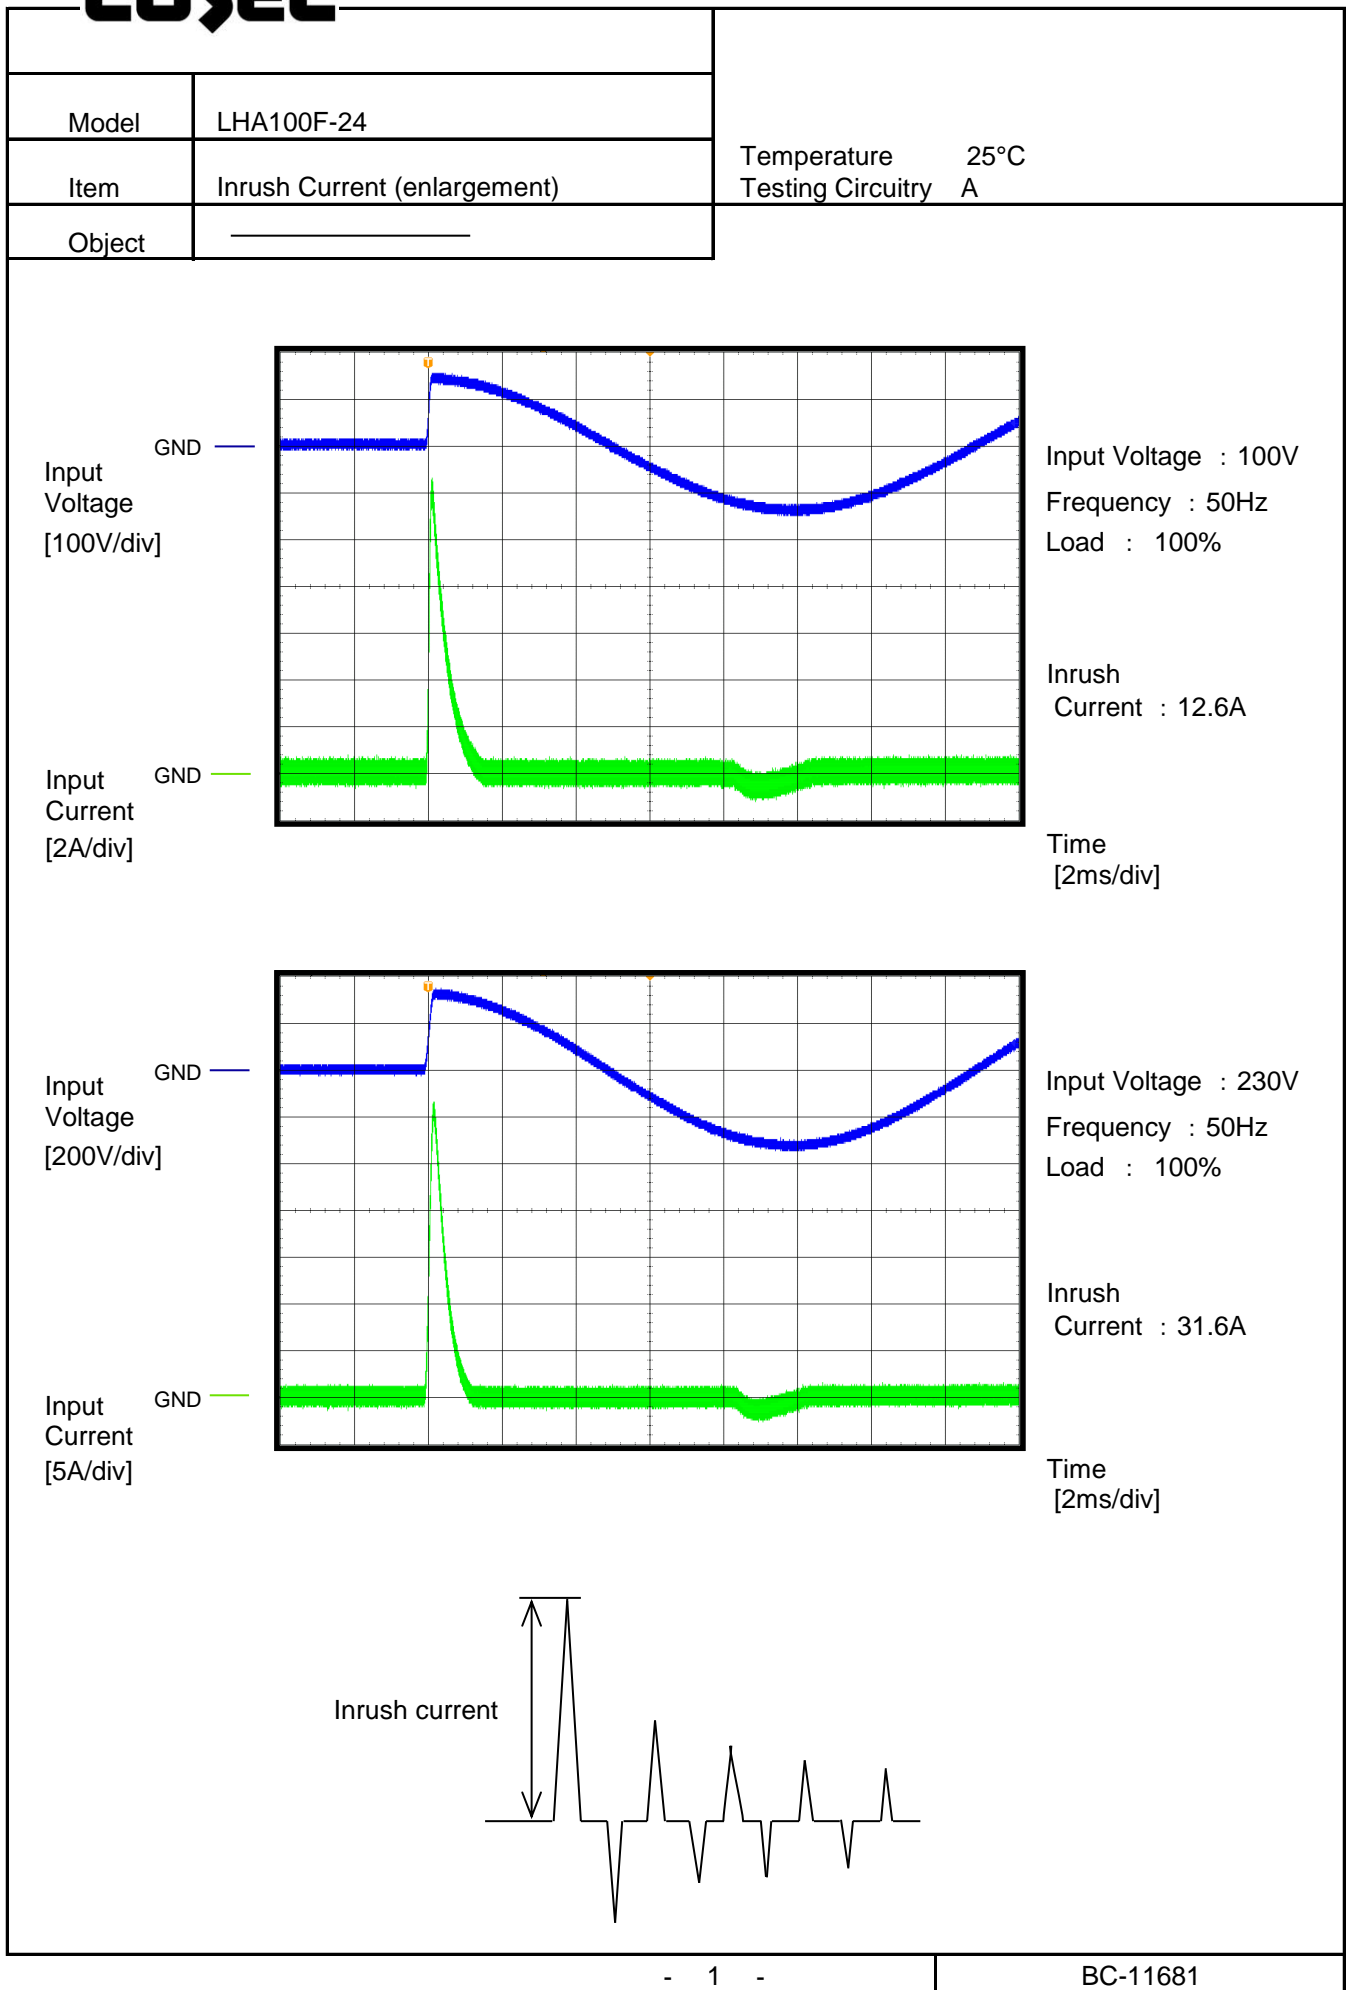
**COSEL**

**COSEL**

Model	LHA100F-24	Temperature    25°C Testing Circuitry   A	
Item	Dynamic Line Regulation		
Object	_____		

Input Voltage  
[200V/div]

Output Voltage  
[50mV/div]

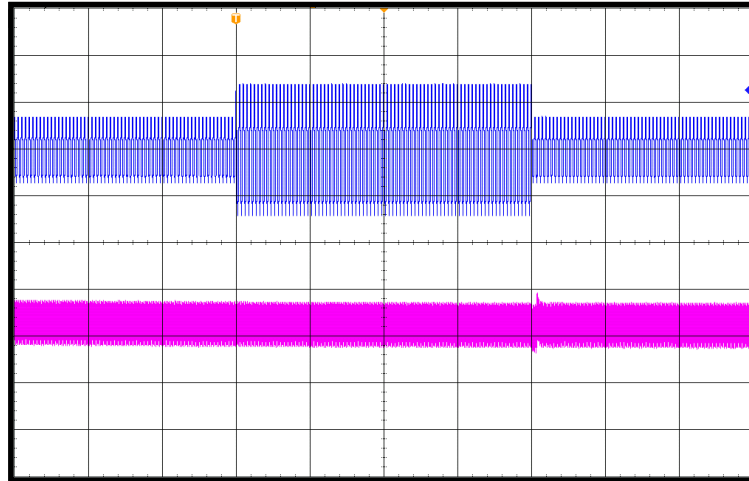


Input Voltage :  
100V ⇔ 230V

Frequency : 50Hz  
Load : 100%

Time  
[400ms/div]

Input Voltage  
[200V/div]



Output Voltage  
[50mV/div]

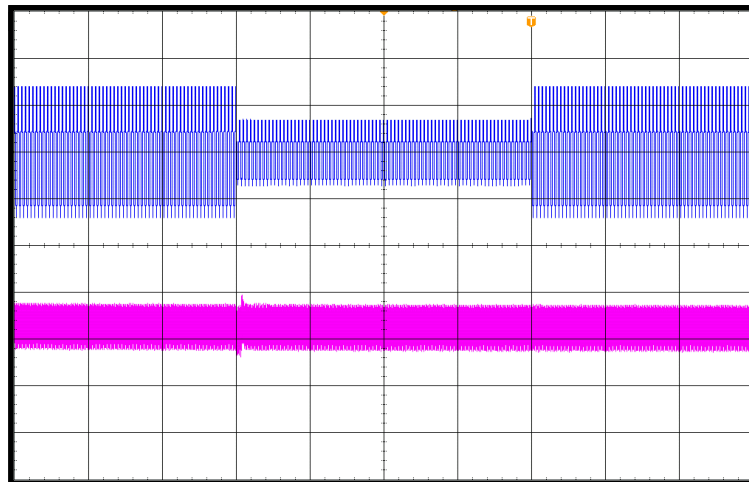



Input Voltage :  
230V ⇔ 100V

Frequency : 50Hz  
Load : 100%


Time  
[400ms/div]

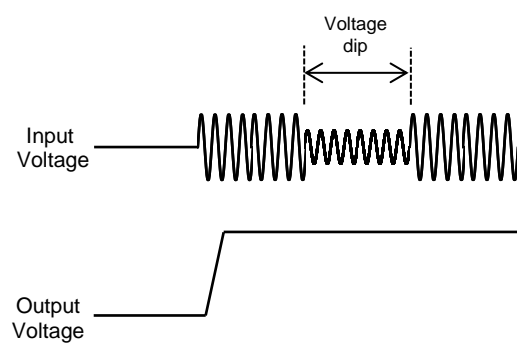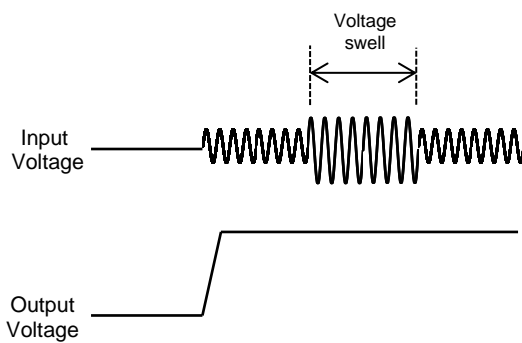

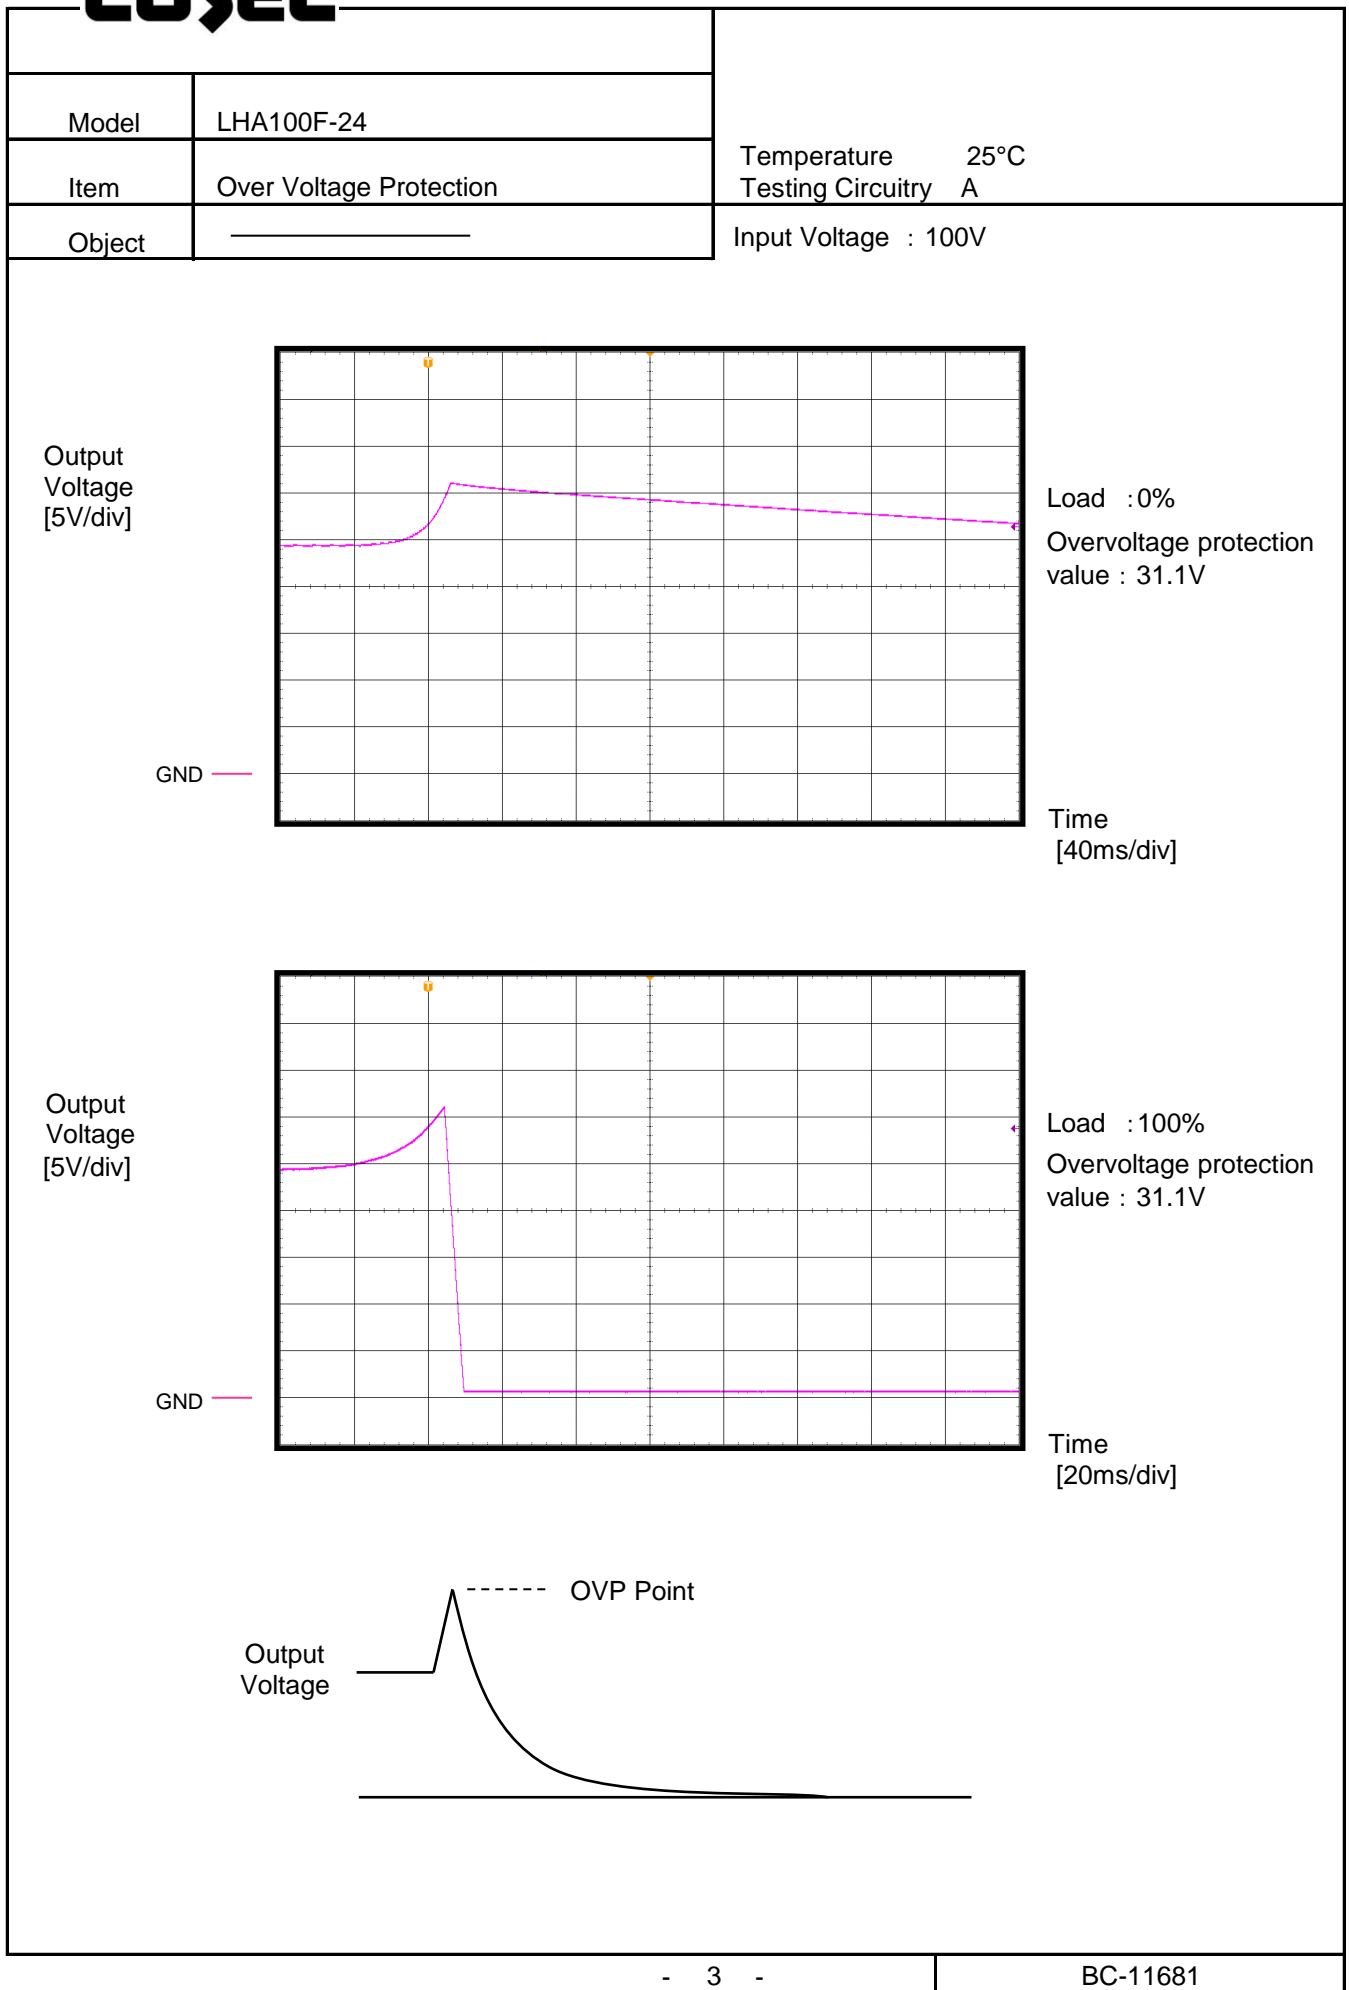**COSEL**

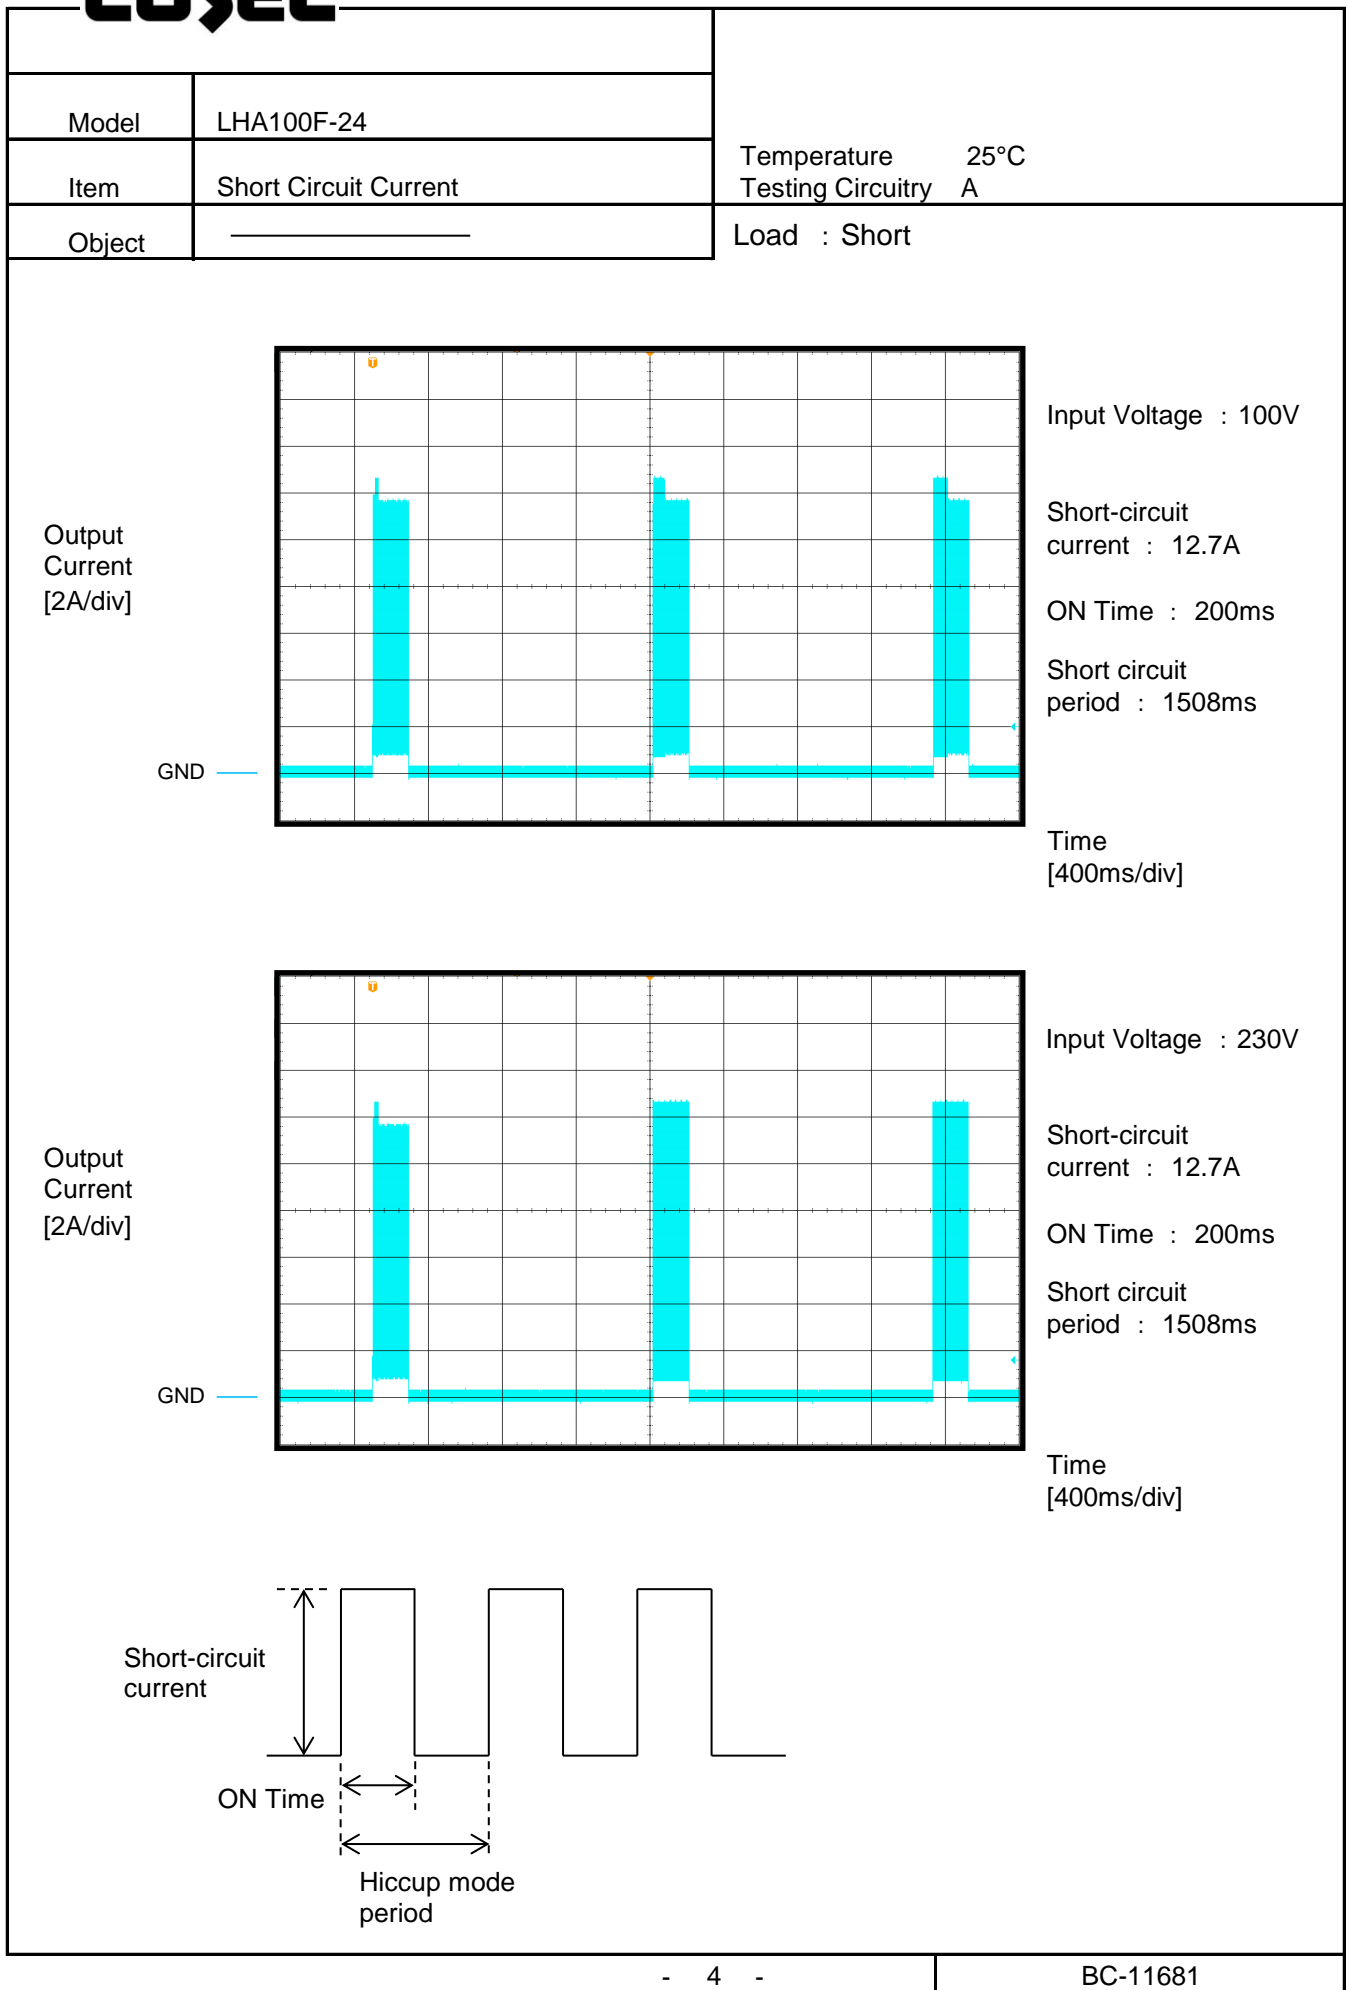**COSEL**

**COSEL**

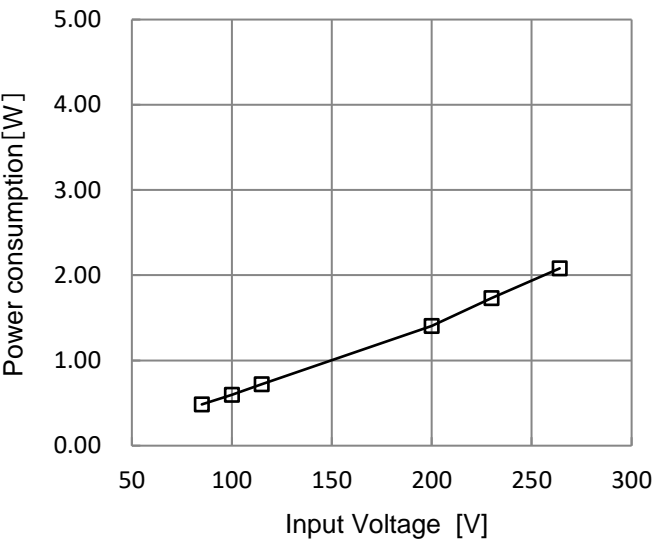Model	LHA100F-24-R2																
Item	Input voltage - Power consumption	Temperature	25°C														
Object	_____	Testing Circuitry	-														
1.Graph		Load :0%															
<div></div> <p>Reducing standby power is possible by OFF signal of the remote control.</p>		2.Values															
		<table><tr><th>Input voltage [V]</th><th>Power consumption [W]</th></tr><tr><td>85</td><td>0.48</td></tr><tr><td>100</td><td>0.60</td></tr><tr><td>115</td><td>0.72</td></tr><tr><td>200</td><td>1.41</td></tr><tr><td>230</td><td>1.73</td></tr><tr><td>264</td><td>2.08</td></tr></table>		Input voltage [V]	Power consumption [W]	85	0.48	100	0.60	115	0.72	200	1.41	230	1.73	264	2.08
Input voltage [V]	Power consumption [W]																
85	0.48																
100	0.60																
115	0.72																
200	1.41																
230	1.73																
264	2.08																

- 5 -

BC-11681

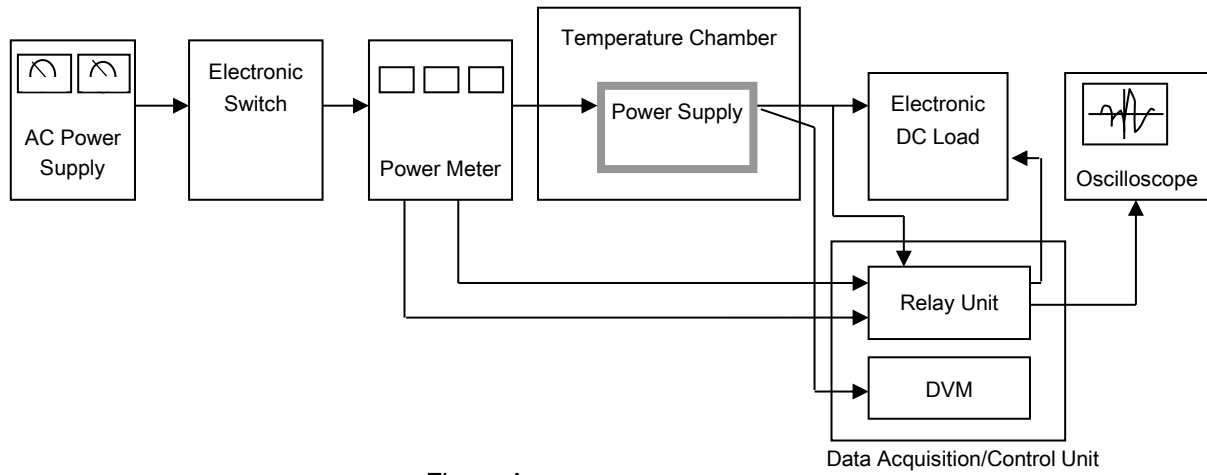


Figure A