



DATA SHEET		Date	09-Oct-19
Model	LHA100F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

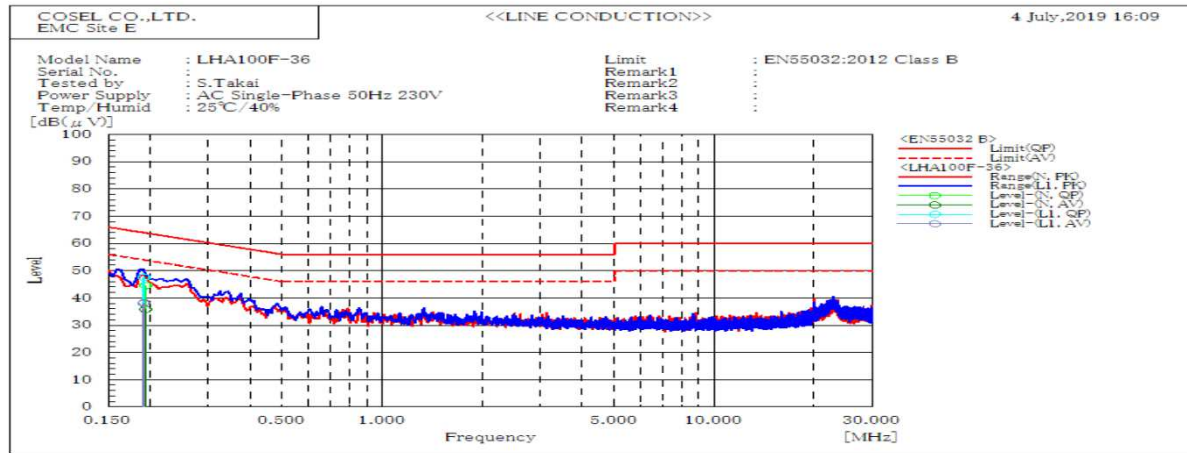


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.194	N	44.5	35.8	63.9	53.9	19.4	18.1	Pass	
0.194	N	44.6	35.8	63.9	53.9	19.3	18.1	Pass	
0.191	L1	47.7	38.1	64	54	16.3	15.9	Pass	
0.192	L1	47.6	38.4	63.9	53.9	16.3	15.5	Pass	

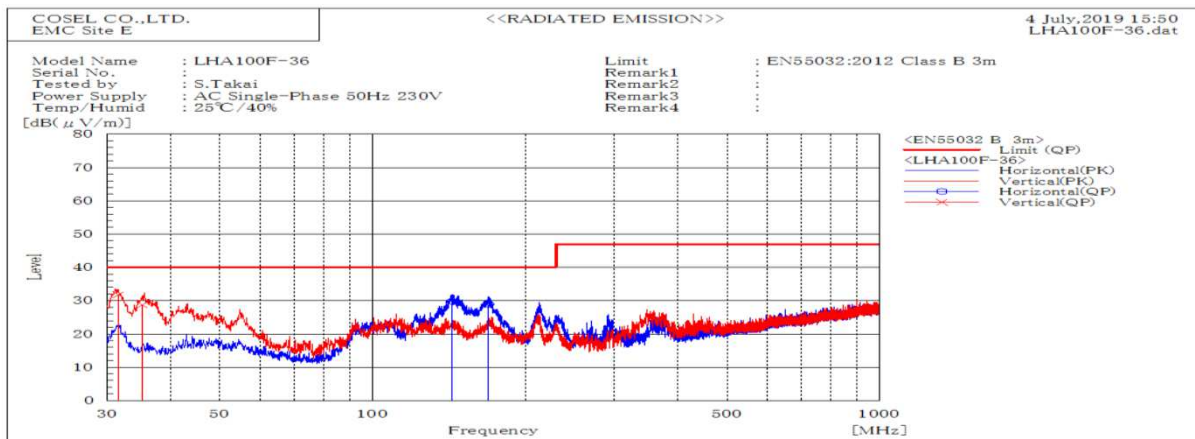


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
31.518	V	Stable	31.9	40	8.1	Pass	100.2	195.3	
35.135	V	Stable	28.7	40	11.3	Pass	100.2	0	
143.377	H	Stable	29.7	40	10.3	Pass	200	0	
169.514	H	Stable	28.8	40	11.2	Pass	188.8	8.9	

DATA SHEET		Date	09-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

1. Line conduction

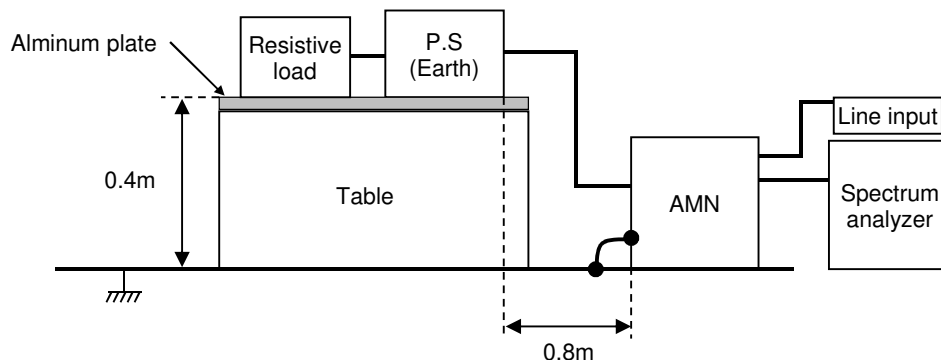

2. Radiated emission

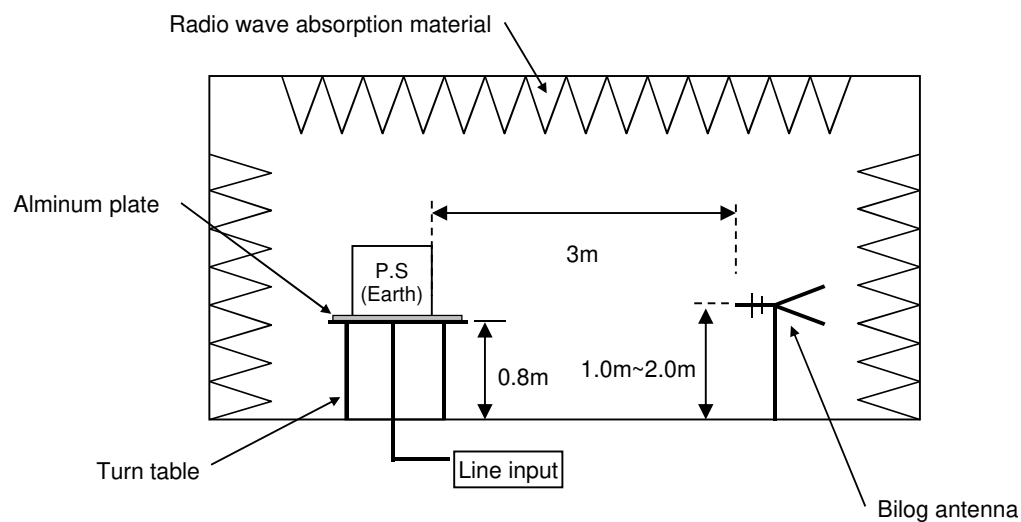

Conditions

Test : EMI

Model Name : LHA100F-36

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

