



# DATA SHEET

DATA SHEET		Date	08-Feb-22
Model	LHA15F-15	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	K.Yamamoto

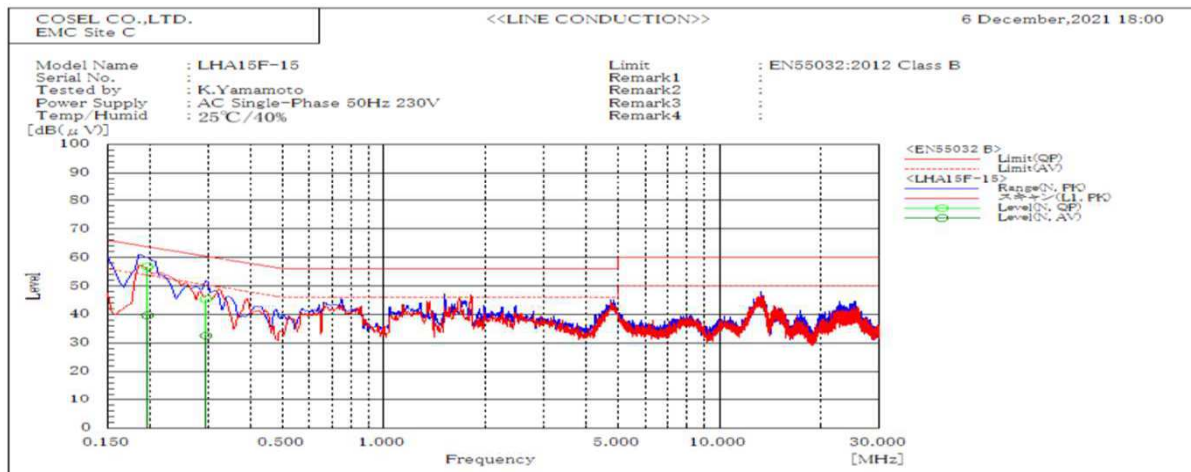

Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.197	N	56.8	39.7	63.7	53.7	6.9	14	Pass	
0.295	N	45.4	32.6	60.4	50.4	15	17.8	Pass	

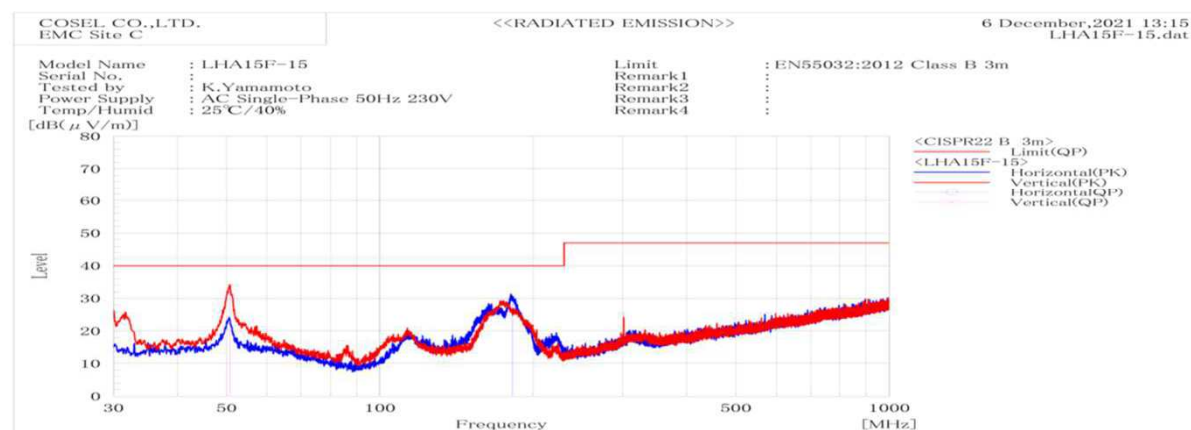


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP						
50.706	V	Stable	32.1	40	7.9	Pass	100.2	117.9		
181.736	H	Stable	29.1	40	10.9	Pass	199.7	186.5		


# DATA SHEET

		Date	08-Feb-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Yamamoto

## 1. Line conduction

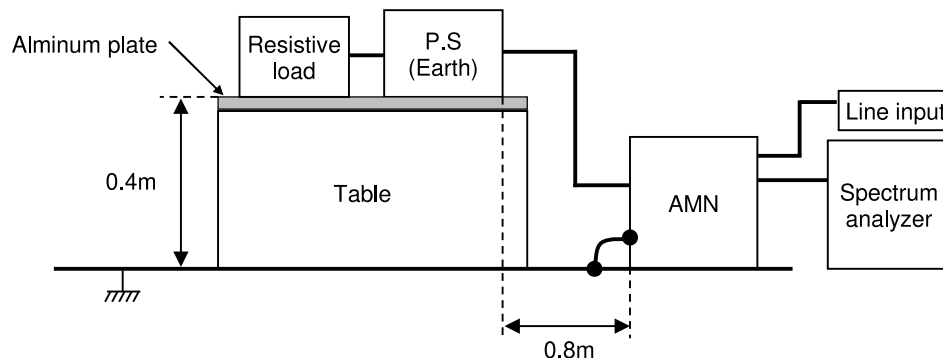

## 2. Radiated emission

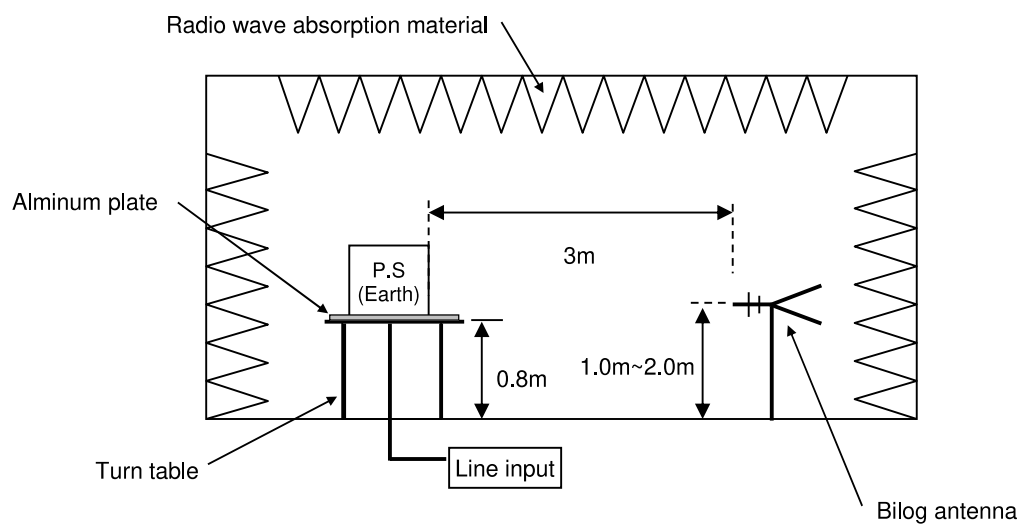




## Conditions

Test : EMI  
Model Name : LHA15F

## Photographs of test set-up

### 1.LINE CONDUCTION

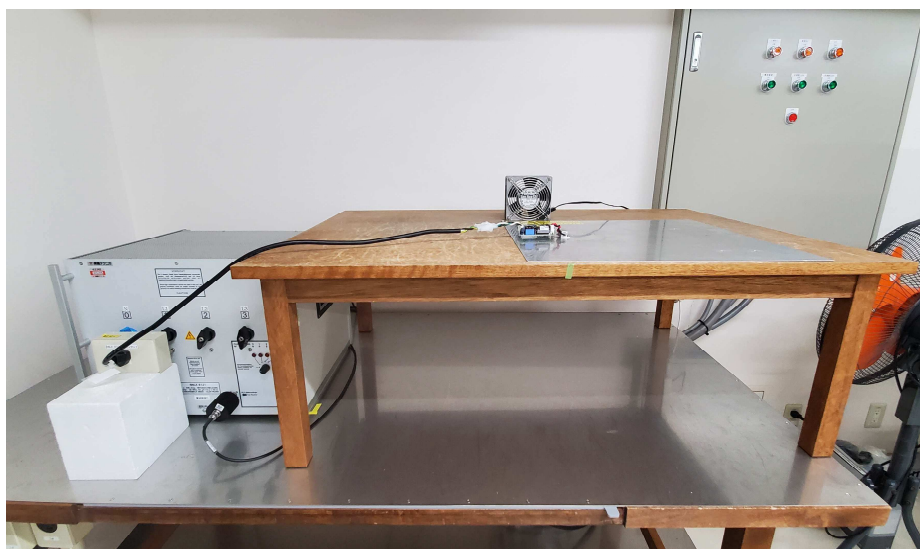

### 2.RADIATED EMISSION

