



DATA SHEET		Date	08-Feb-22
Model	LHA15F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Yamamoto

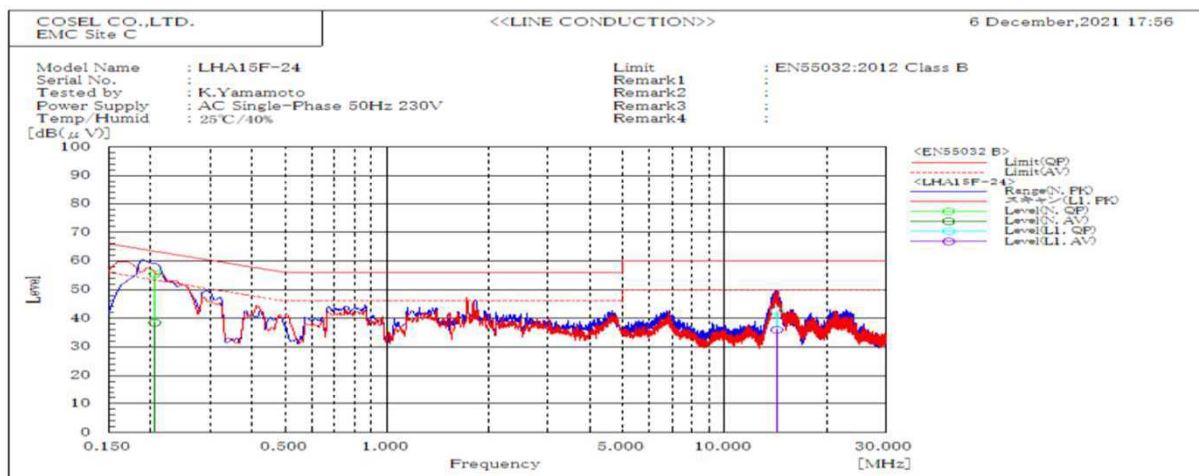

Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
14.263	L1	42.6	36	60	50	17.4	14	Pass	
0.206	N	55.5	38.5	63.4	53.4	7.9	14.9	Pass	

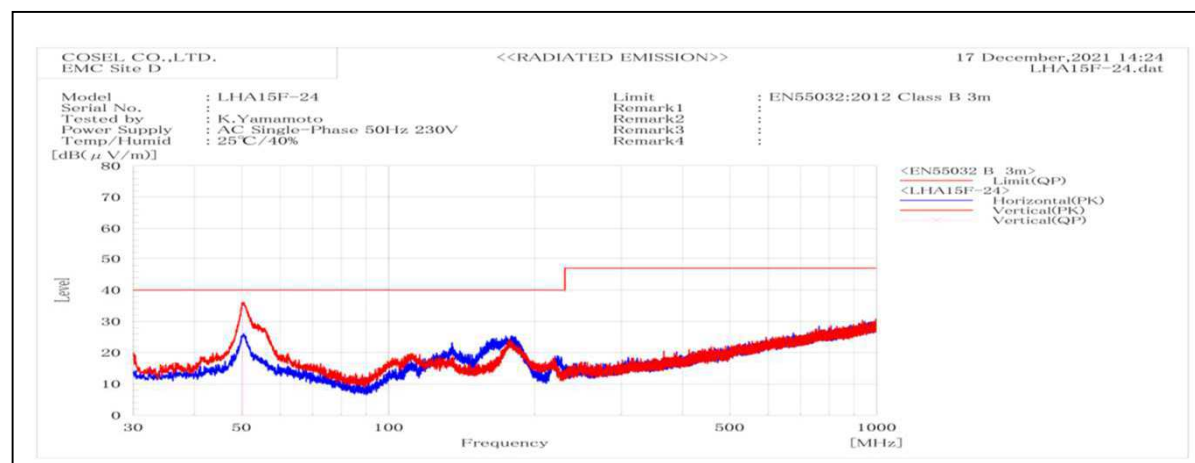


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
50.377	V	Stable	34	40	6	Pass	100	301.6	


DATA SHEET

		Date	08-Feb-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Yamamoto

1. Line conduction

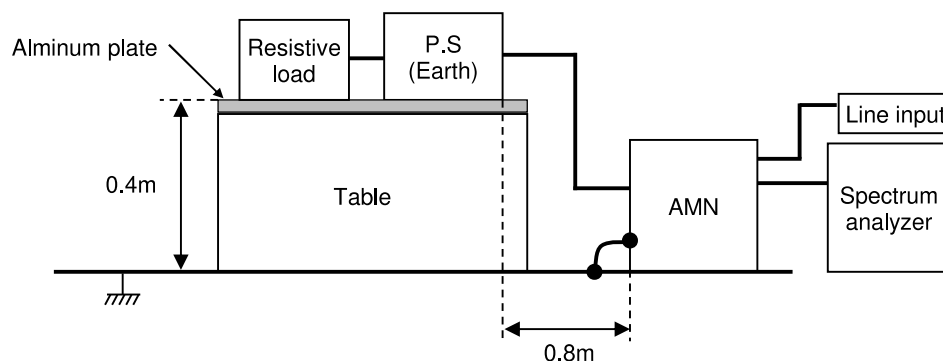

2. Radiated emission

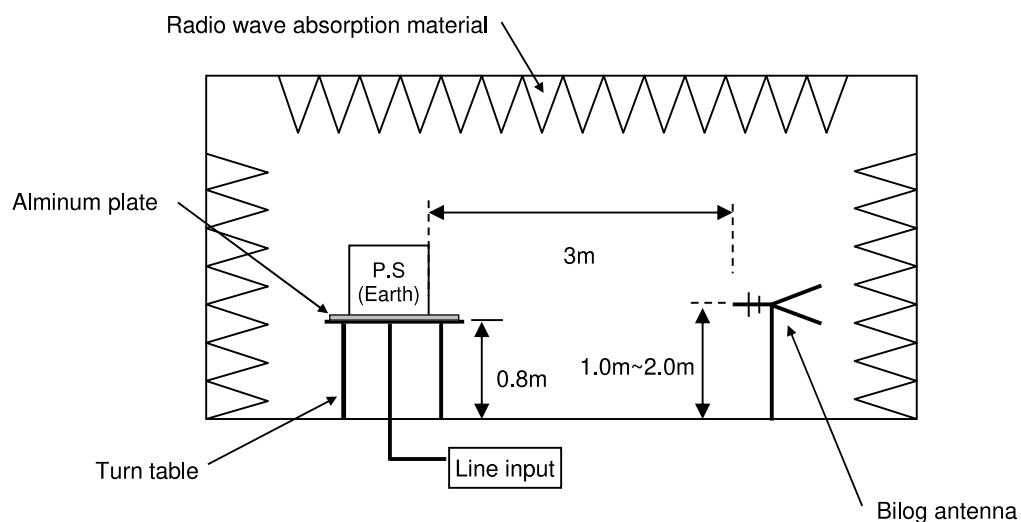




Conditions

Test : EMI
Model Name : LHA15F

Photographs of test set-up

1.LINE CONDUCTION

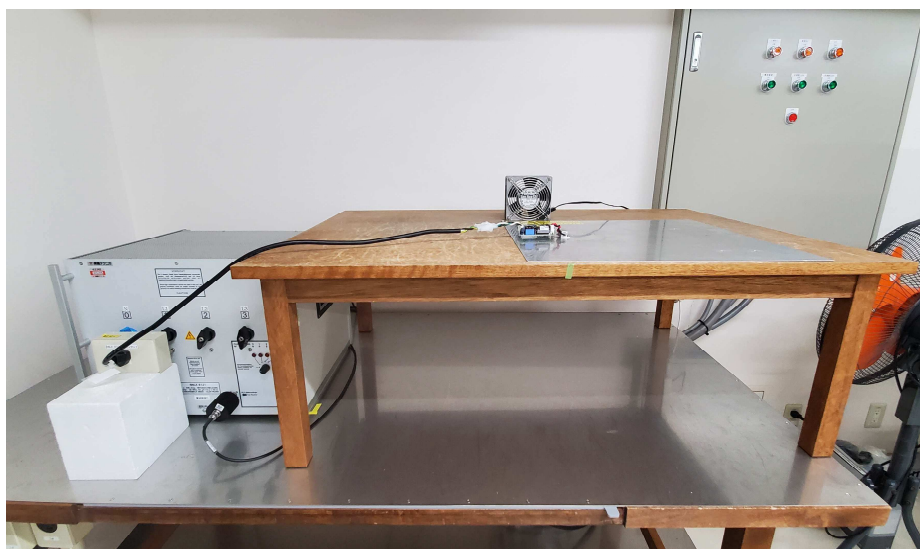

2.RADIATED EMISSION

