



DATA SHEET		Date	10-Oct-19
Model	LHA30F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

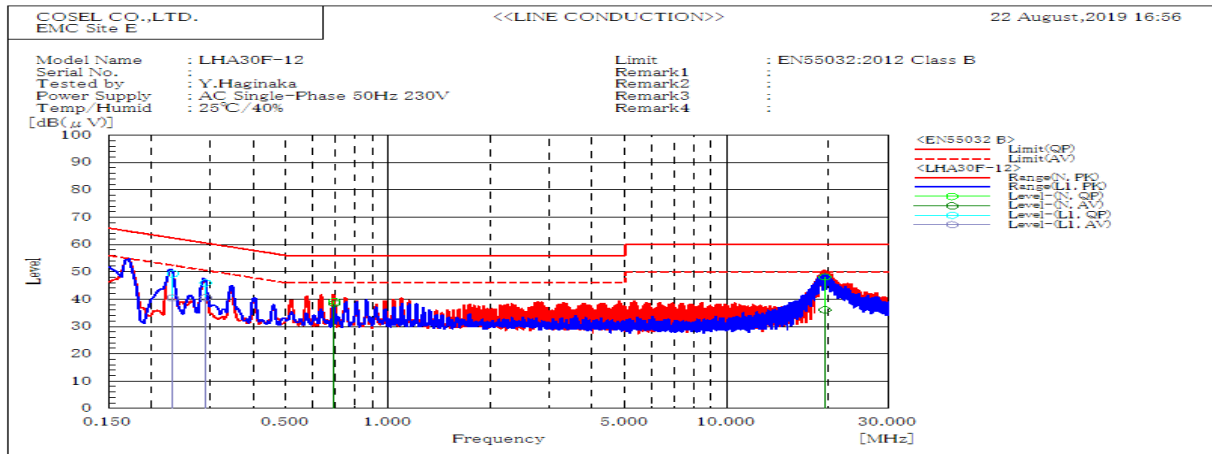


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.696	N	39.1	38.4	56	46	16.9	7.6	Pass	
19.438	N	48.1	36.1	60	50	11.9	13.9	Pass	
0.231	L1	49.3	40.4	62.4	52.4	13.1	12	Pass	
0.29	L1	45.9	40.6	60.5	50.5	14.6	9.9	Pass	

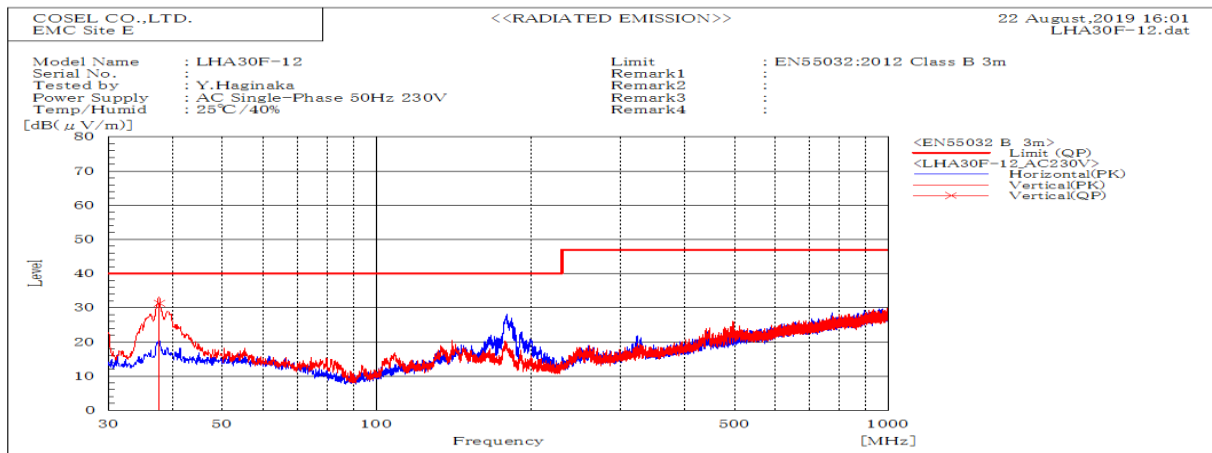


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
37.727	V	Stable	31.3	40	8.7	Pass	100.2	312.7	

DATA SHEET		Date	10-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

1. Line conduction

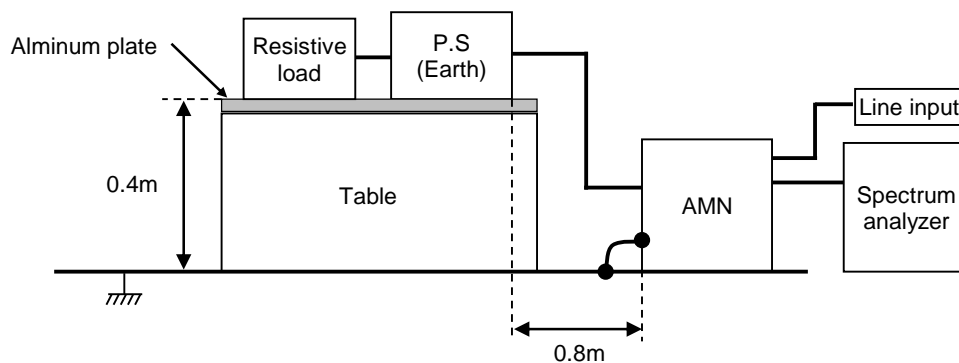

2. Radiated emission

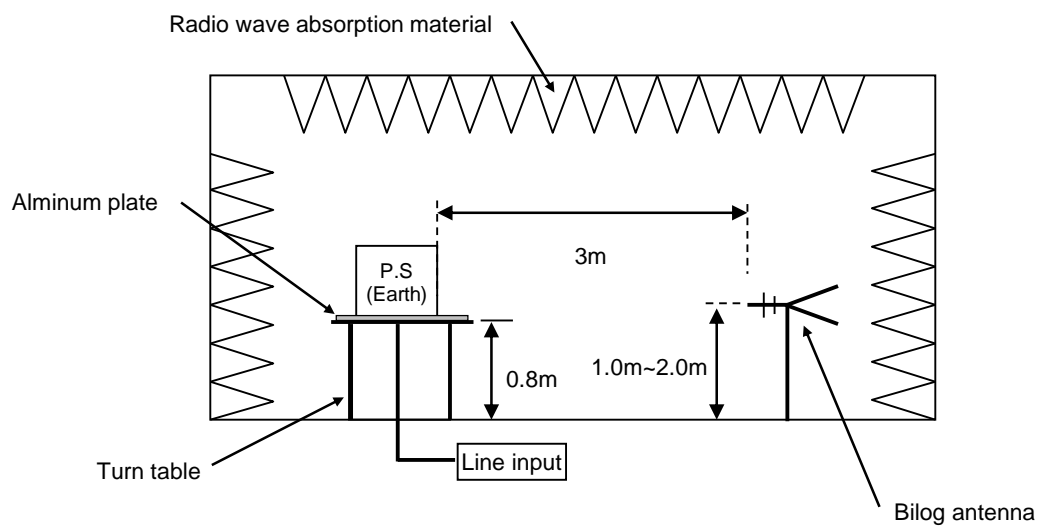

Conditions

Test : EMI
Model Name : LHA30F

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

