


## LHA30F-24 Expected Life : 推定寿命

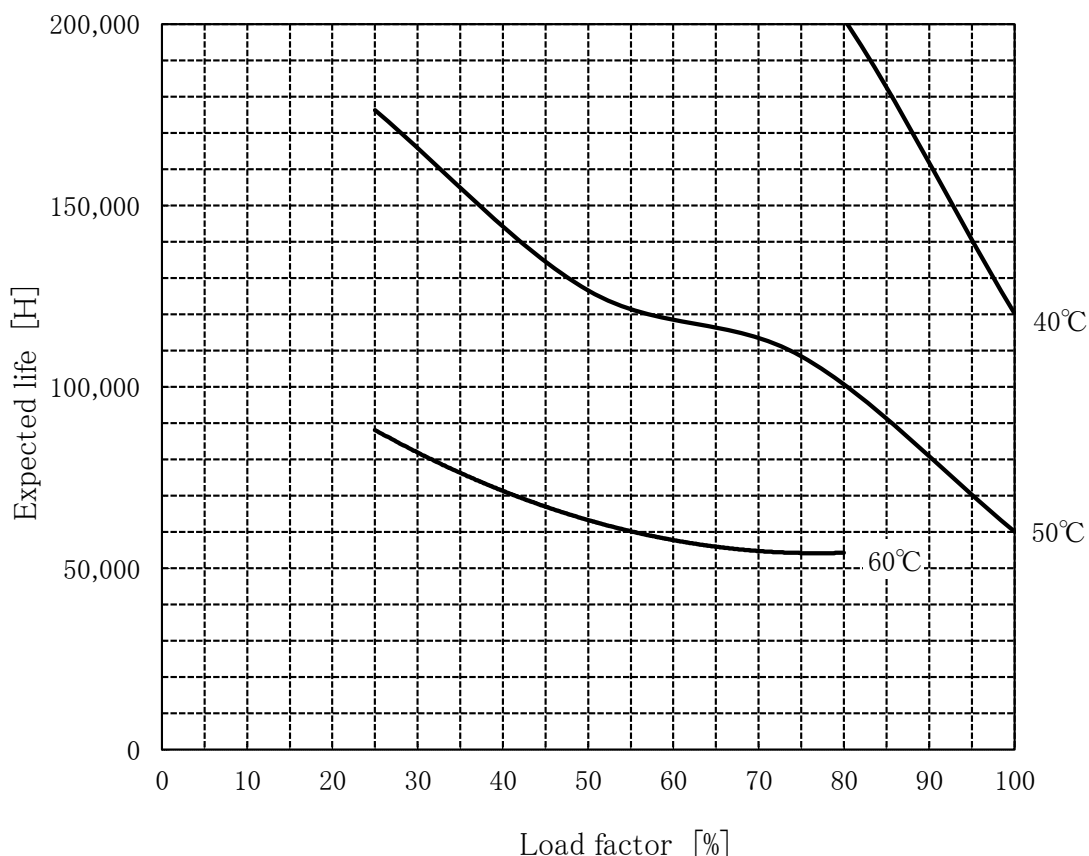

- Above expected life time is calculated according our calculation standard.  
上記推定寿命は、当社算出基準に従い算出したものです。
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.  
10万時間以上の領域では、封ロゴムの劣化等の影響は、計算式には含まれていません。

## Conditions



(1) Input voltage AC90~264V 60Hz

(2) Output voltage/  
current

DC OUTPUT	Load factor			
	100%	75%	50%	25%
24V	1.3A	0.975A	0.65A	0.325A

(3) Cooling method Convection

(4) Mounting method Refer below

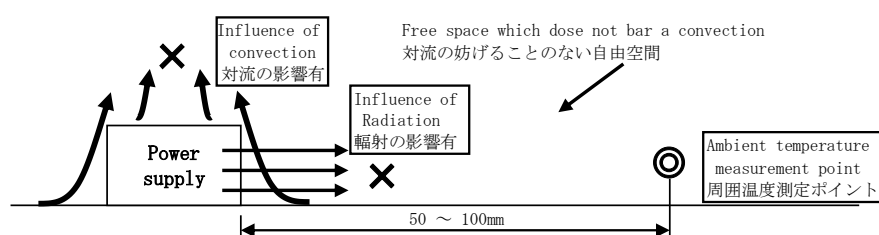

Mounting method(B)

With the ambient temperature of graph, it measures in the enviroment of a figure.  
グラフの周囲温度とは、図の環境で測定したものです。