



## DATA SHEET

Date		10-Oct-19	
Model	LHA50F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

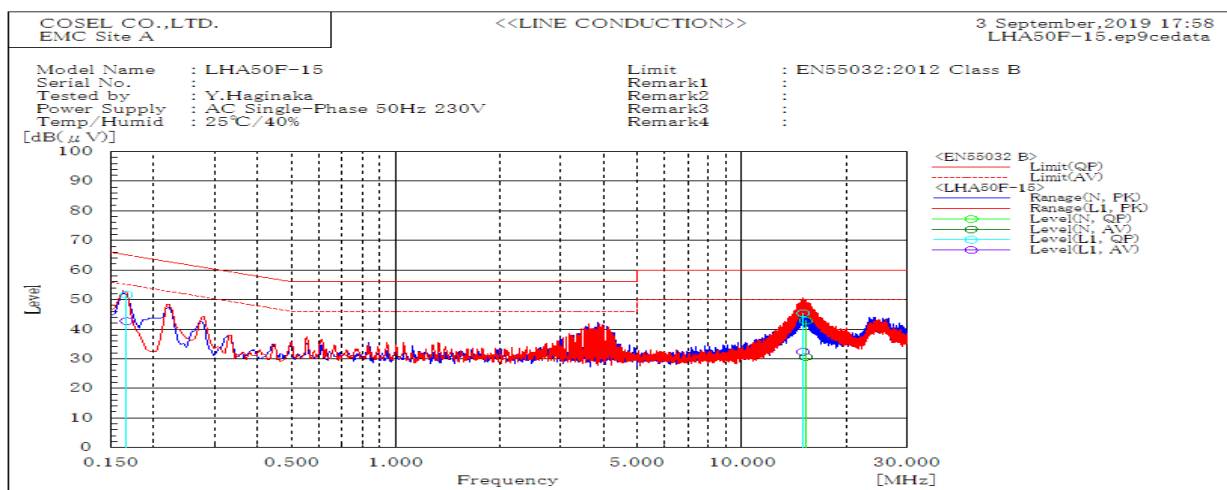


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
15.309	N	42.9	30.6	60	50	17.1	19.4	Pass	
0.167	L1	51.6	42.7	65.1	55.1	13.5	12.4	Pass	
15.028	L1	45.4	32.3	60	50	14.6	17.7	Pass	

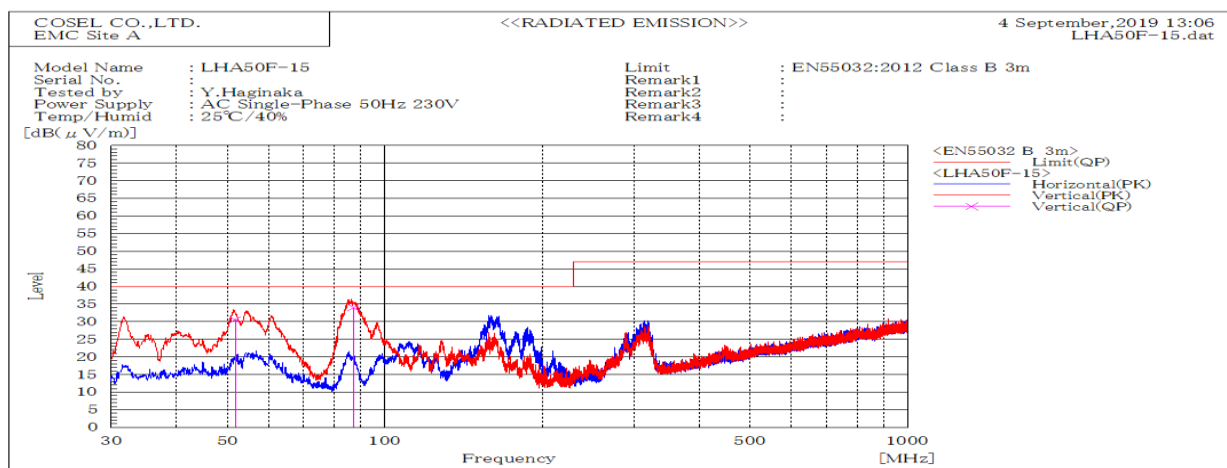


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
87.19	V	Stable	33.9	40	6.1	Pass	100	65	
51.808	V	Stable	30.6	40	9.4	Pass	100	10	

DATA SHEET		Date	10-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

## 1. Line conduction

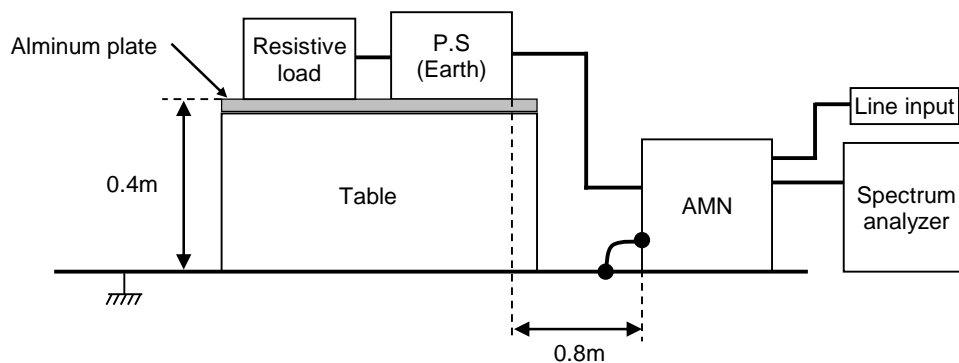

## 2. Radiated emission

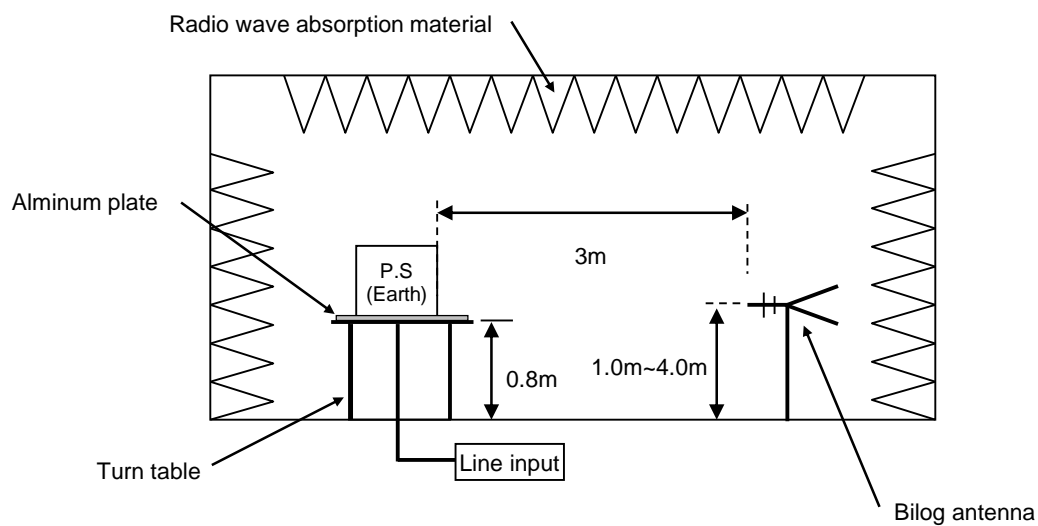

## Conditions

Test : EMI  
Model Name : LHA50F

## Photographs of test set-up

### 1.LINE CONDUCTION



### 2.RADIATED EMISSION

