



DATA SHEET		Date	10-Oct-19
Model	LHA50F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

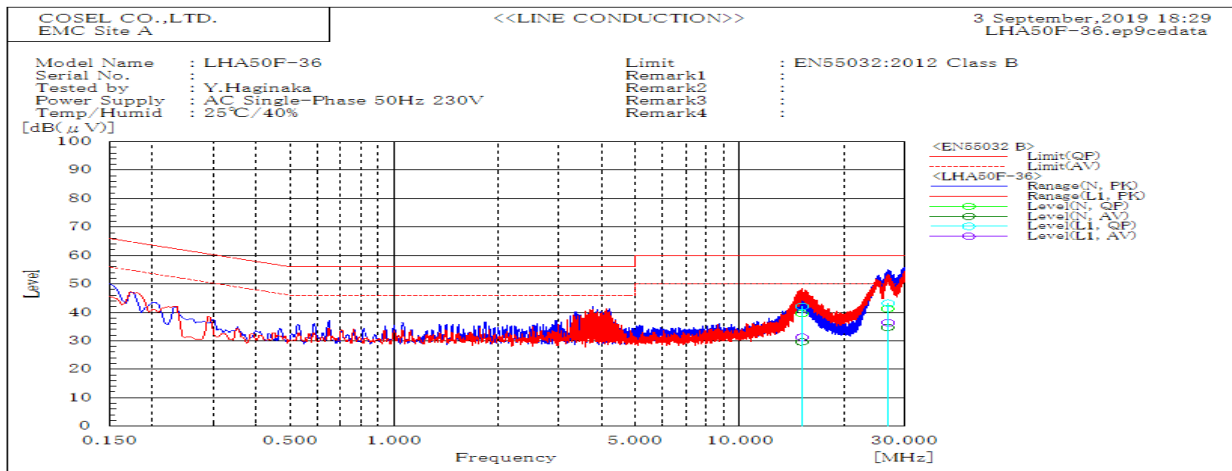


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
15.128	N	39.6	29.6	60	50	20.4	20.4	Pass	
26.777	N	41.3	34.7	60	50	18.7	15.3	Pass	
15.166	L1	42.1	31.3	60	50	17.9	18.7	Pass	
26.91	L1	43.3	36.4	60	50	16.7	13.6	Pass	

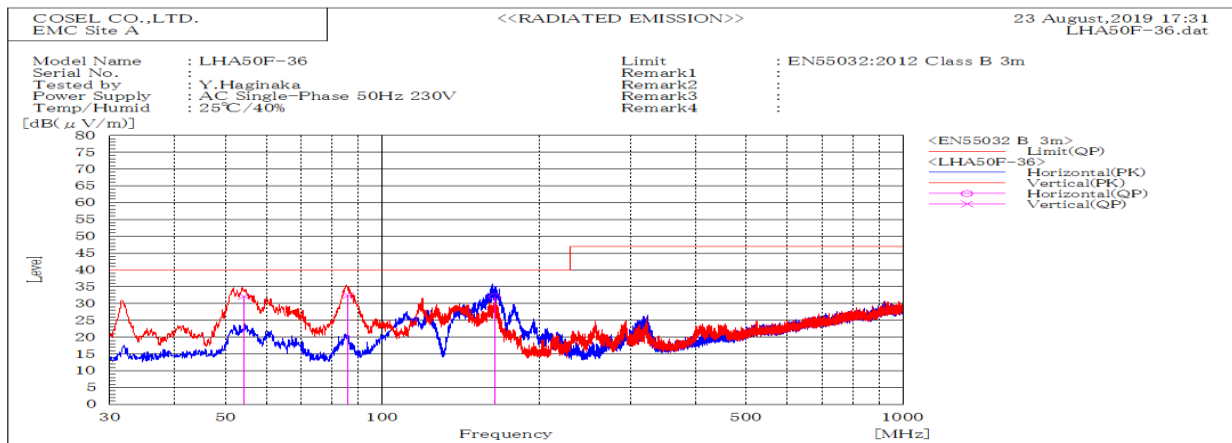


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
164.417	H	Stable	32	40	8	Pass	175.1	194.1		
86.064	V	Stable	32.5	40	7.5	Pass	101.5	22.6		
54.257	V	Stable	32.1	40	7.9	Pass	100	357.5		

DATA SHEET		Date	10-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Haginaka

## 1. Line conduction

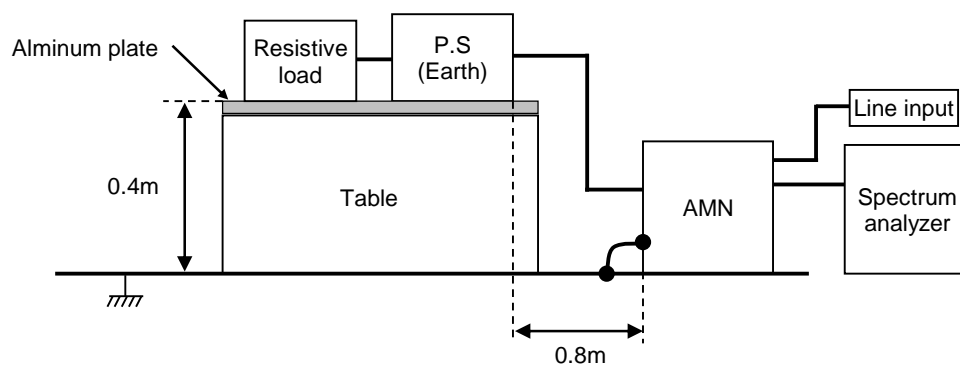

## 2. Radiated emission

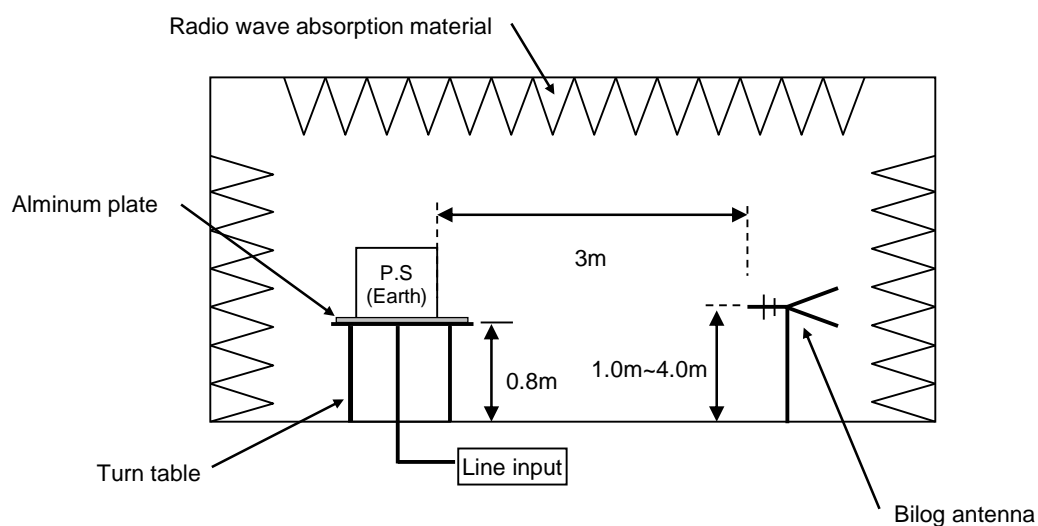

## Conditions

Test : EMI  
Model Name : LHA50F

## Photographs of test set-up

### 1.LINE CONDUCTION



### 2.RADIATED EMISSION

