



EXTRA TEST DATA OF LHA75F-15

*Regulated DC Power Supply
Feb 20, 2021*

COSEL CO.,LTD.




CONTENTS

1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Overtoltage Protection (waveform)	3
4.Hiccup cycle (by Overcurrent Protection)	4
5.Figure of Testing Circuitry	5

(Final Page 5)

COSEL

Model	LHA75F-15		
Item	Inrush Current (enlargement)	Temperature	25°C
Object	_____	Testing Circuitry	A

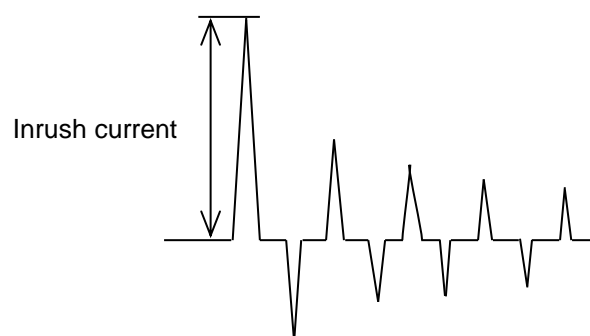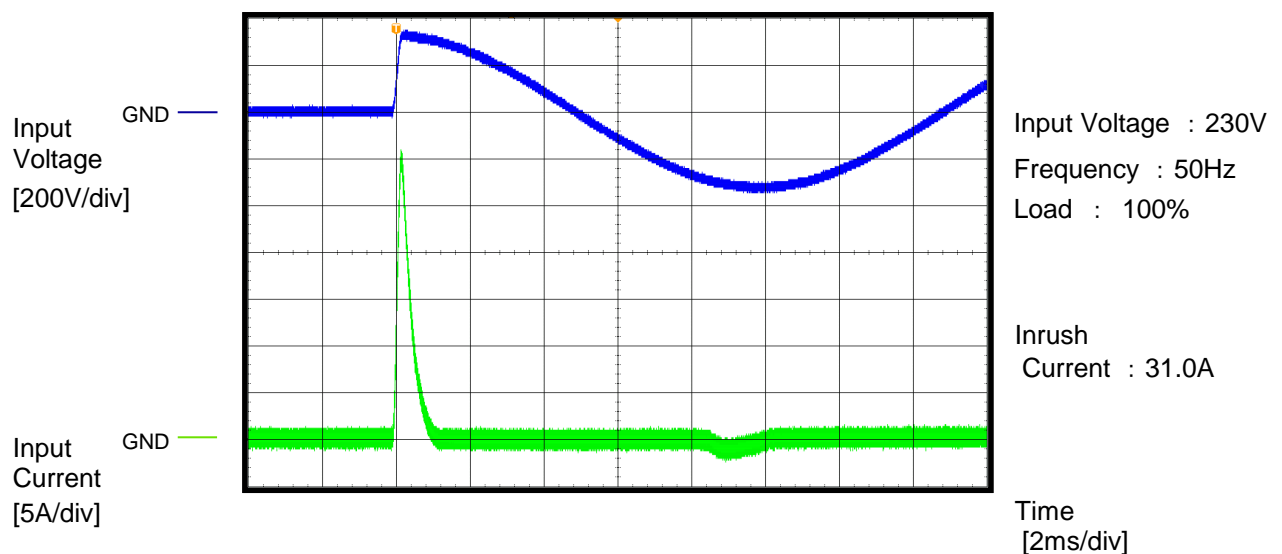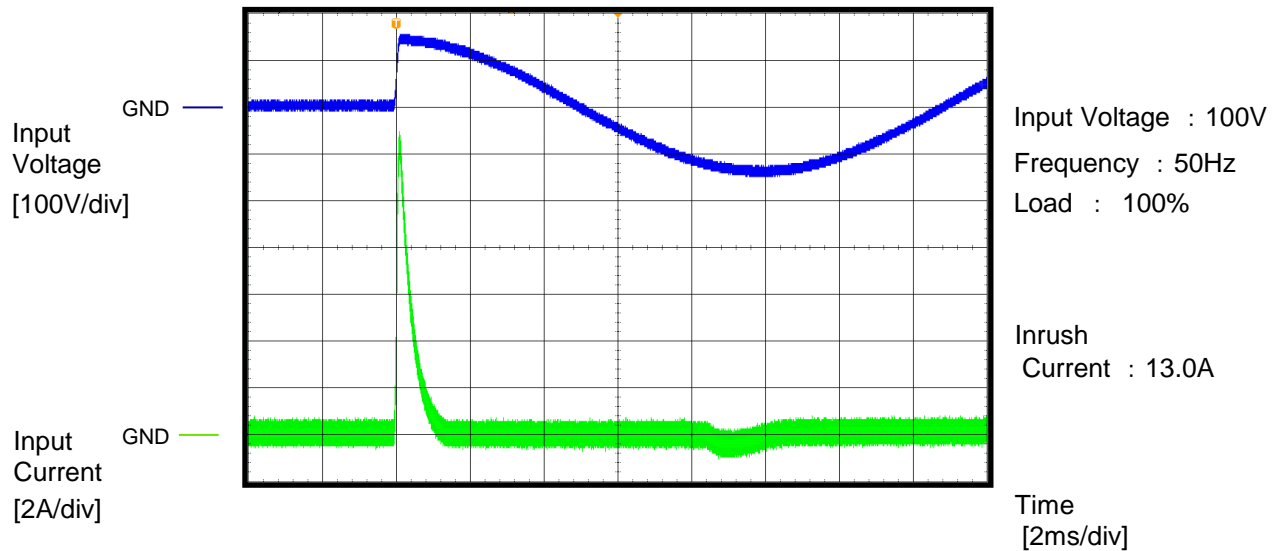


COSEL

Model	LHA75F-15	Temperature	25°C
Item	Dynamic Line Regulation	Testing Circuitry	A
Object	_____		

Input Voltage
[200V/div]

Output Voltage
[50mV/div]

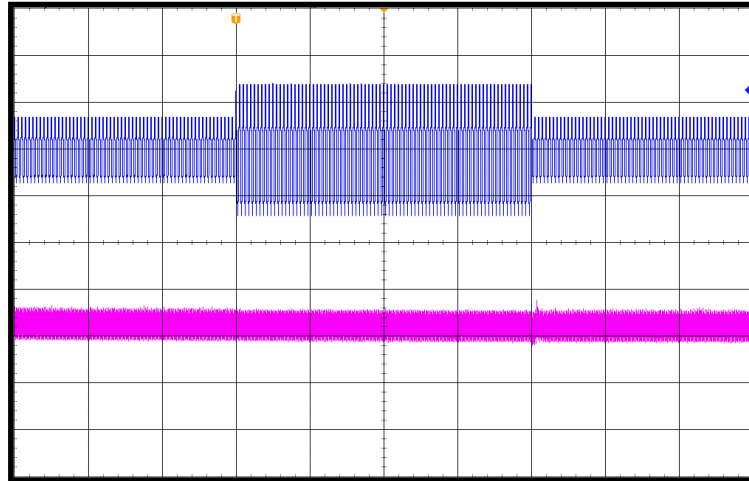


Input Voltage :
100V \Leftrightarrow 230V

Frequency : 50Hz
Load : 100%

Time
[400ms/div]

Input Voltage
[200V/div]



Output Voltage
[50mV/div]

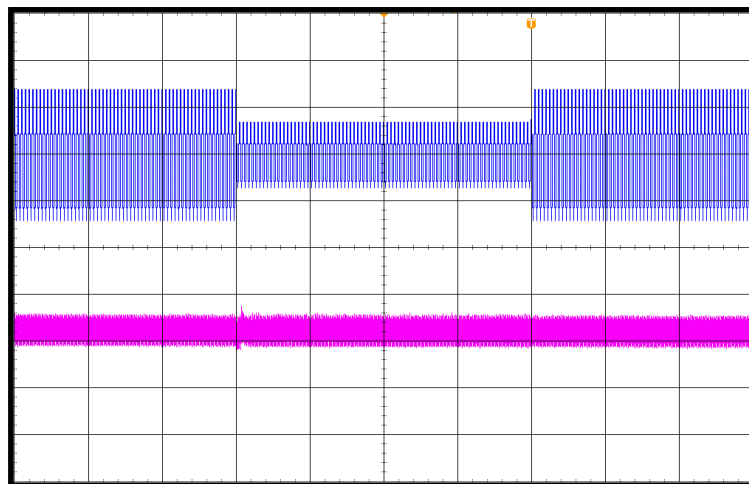


Input Voltage :
230V \Leftrightarrow 100V

Frequency : 50Hz
Load : 100%

Time
[400ms/div]

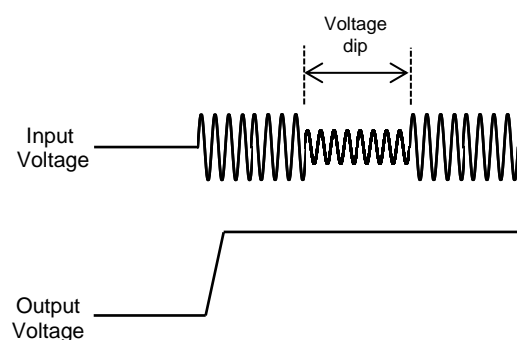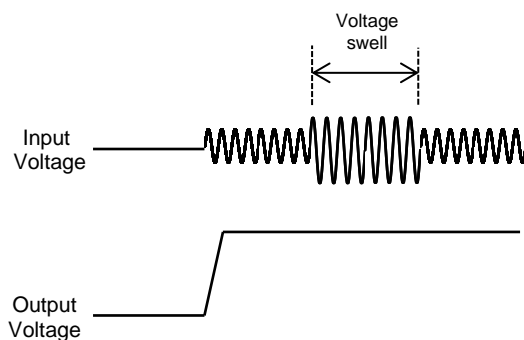

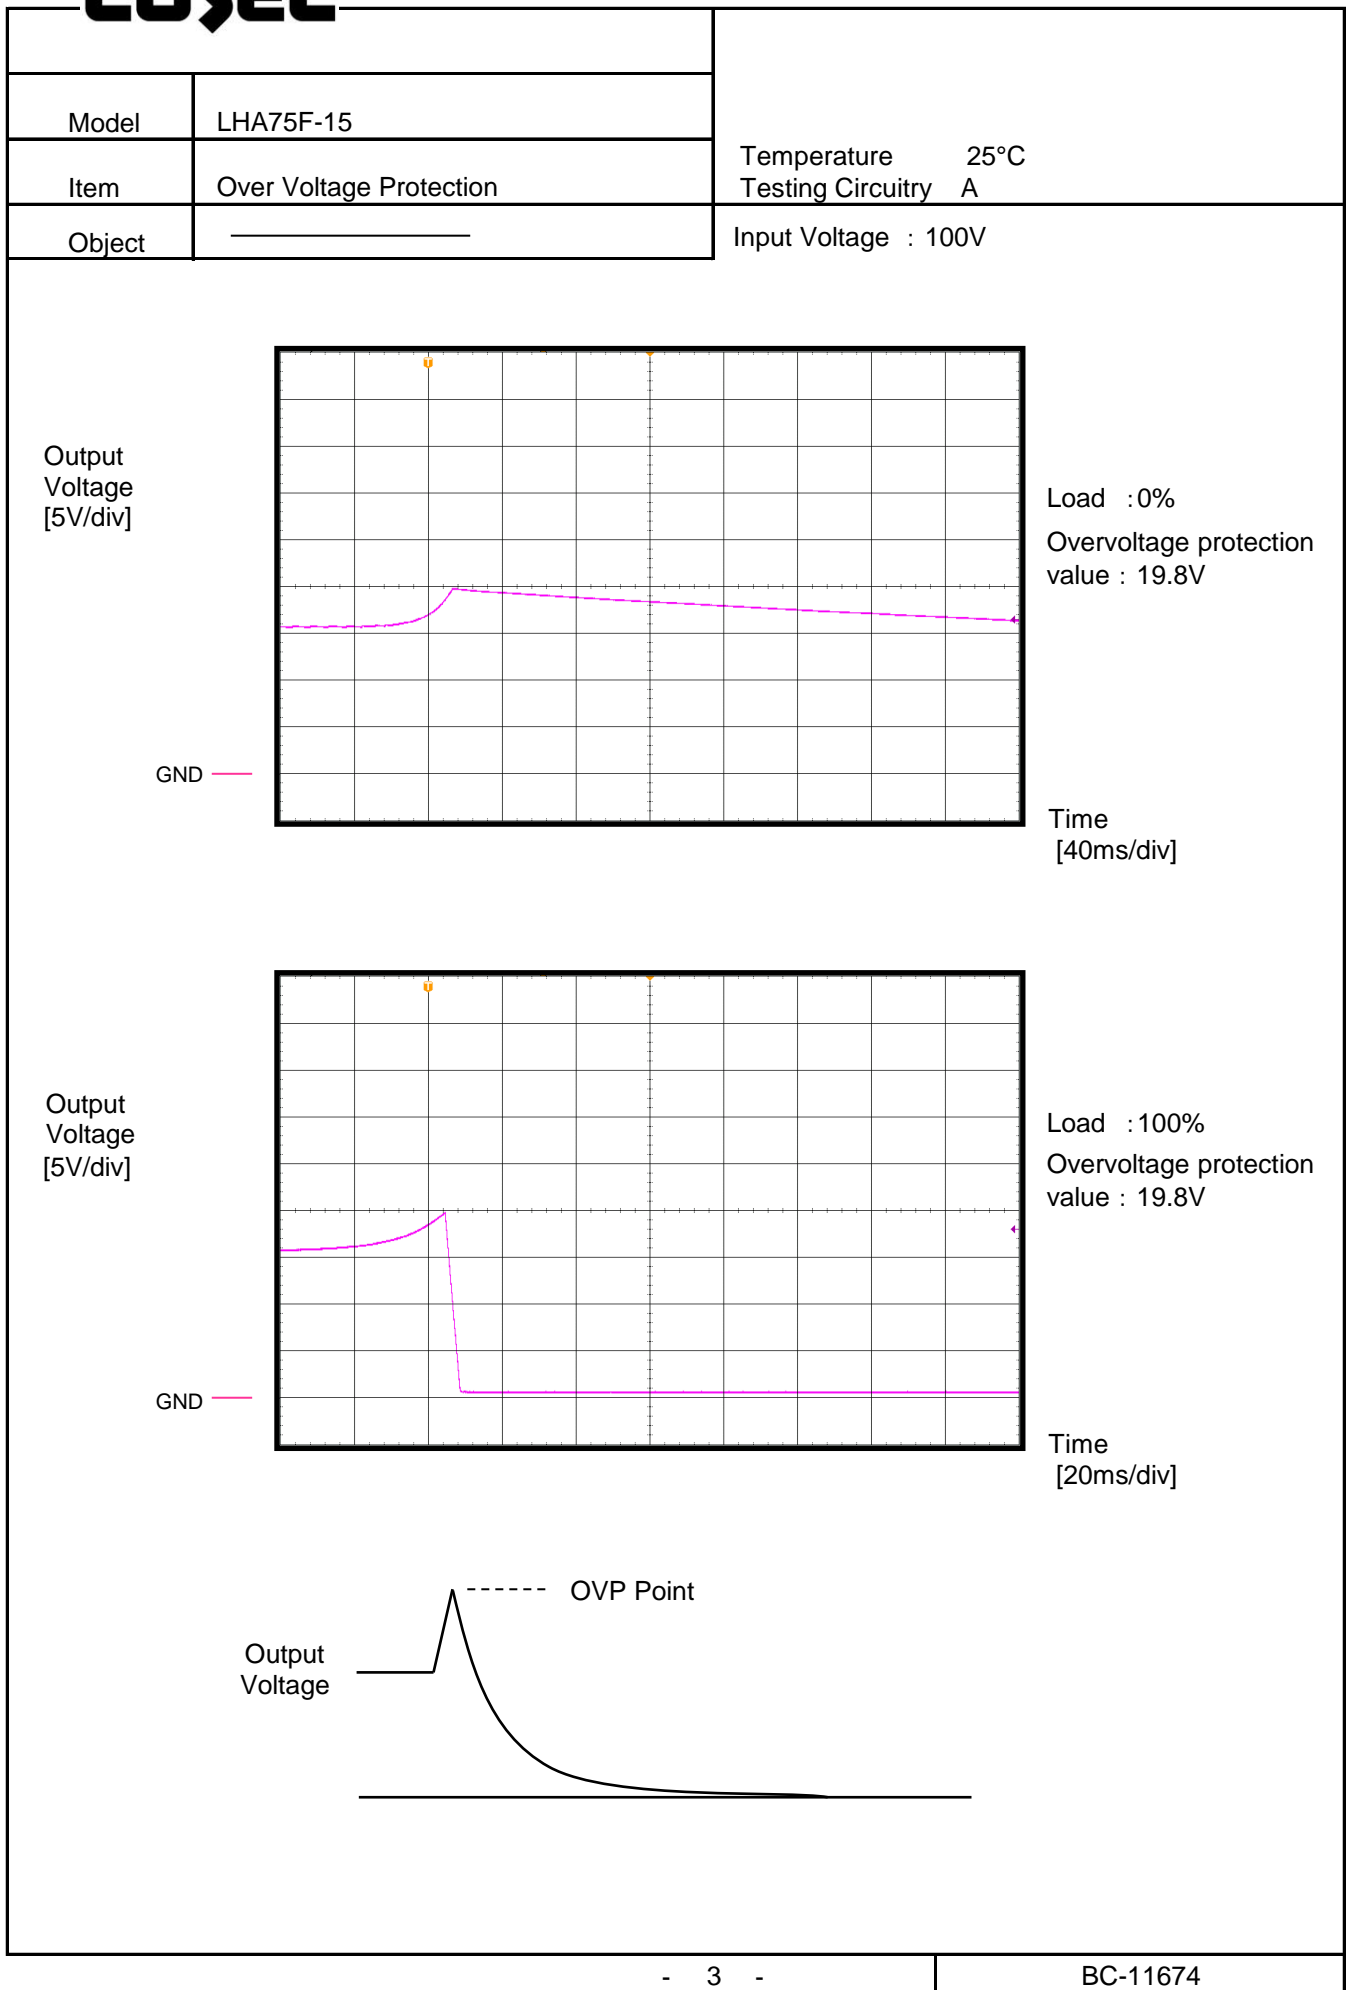
COSEL

COSEL

		Temperature 25°C Testing Circuitry A Load : Short
Model	LHA75F-15	
Item	Short Circuit Current	
Object	_____	

Output Current
[2A/div]

GND

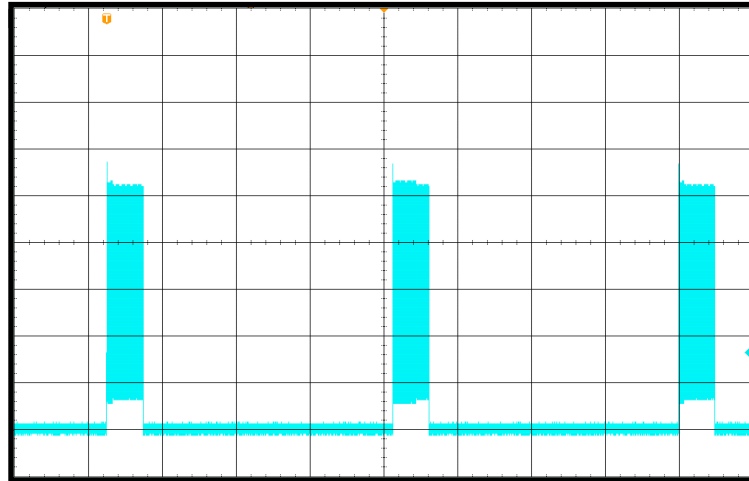


Input Voltage : 100V

Short-circuit
current : 12.8A

ON Time : 200ms

Short circuit
period : 1556msTime
[400ms/div]Output Current
[2A/div]

GND

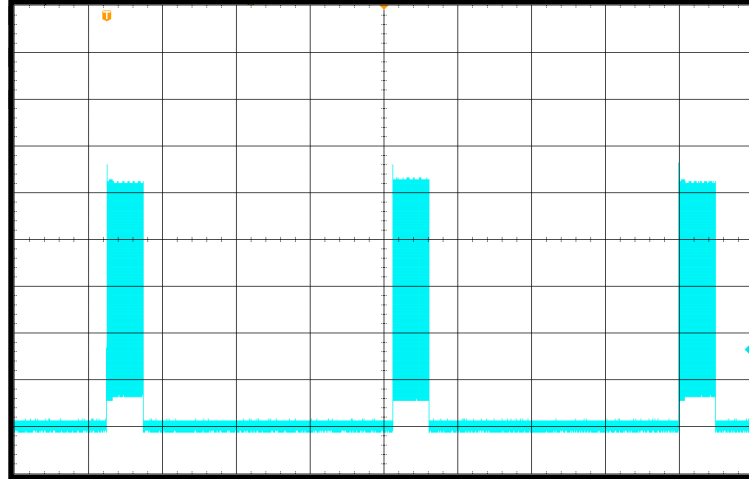

Input Voltage : 230V

Short-circuit
current : 12.8A

ON Time : 200ms

Short circuit
period : 1556msTime
[400ms/div]