



DATA SHEET		Date	09-Oct-19
Model	LHA75F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

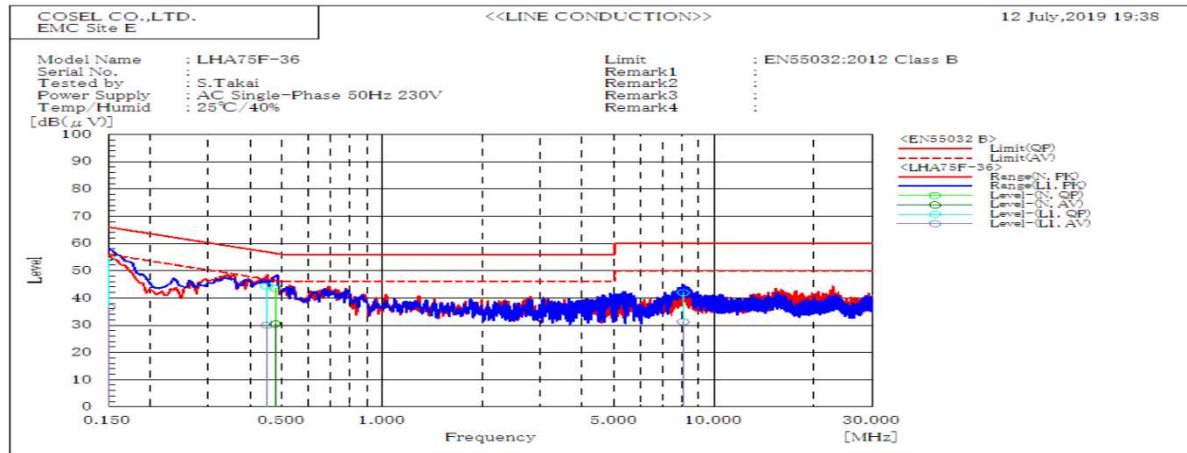


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.151	L1	54.8	36.5	66	56	11.2	19.5	Pass	
0.449	L1	44.3	30	56.9	46.9	12.6	16.9	Pass	
8.061	L1	42	31.3	60	50	18	18.7	Pass	
0.476	N	43.6	30.4	56.4	46.4	12.8	16	Pass	

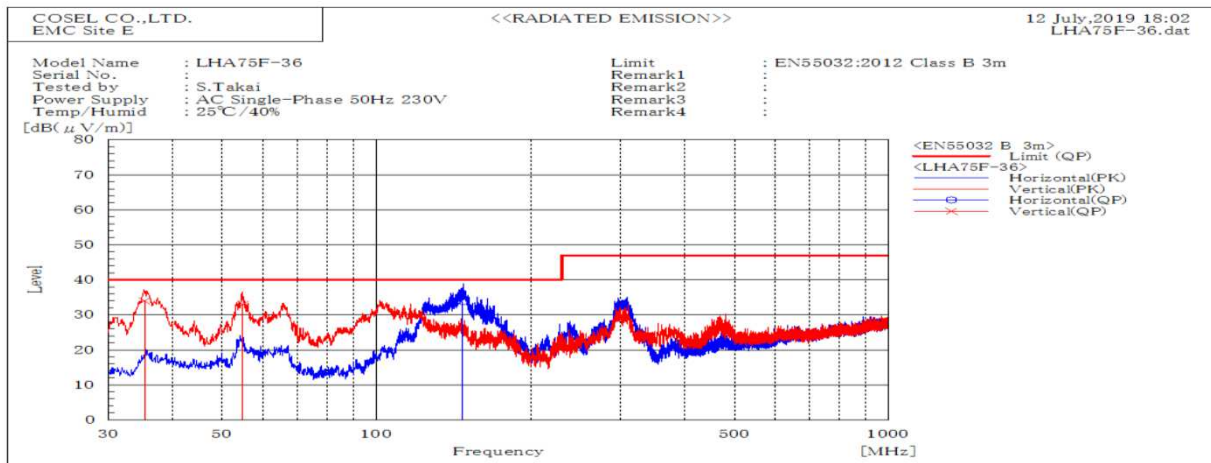


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
35.282	V	Stable	34	40	6	Pass	100	191.9	
54.852	V	Stable	33.1	40	6.9	Pass	100	250	
147.622	H	Stable	33.8	40	6.2	Pass	199.7	11.4	

DATA SHEET		Date	09-Oct-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Takai

1. Line conduction

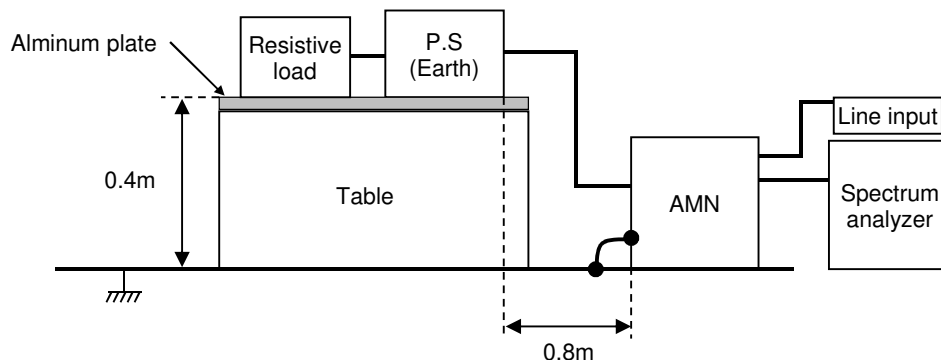

2. Radiated emission

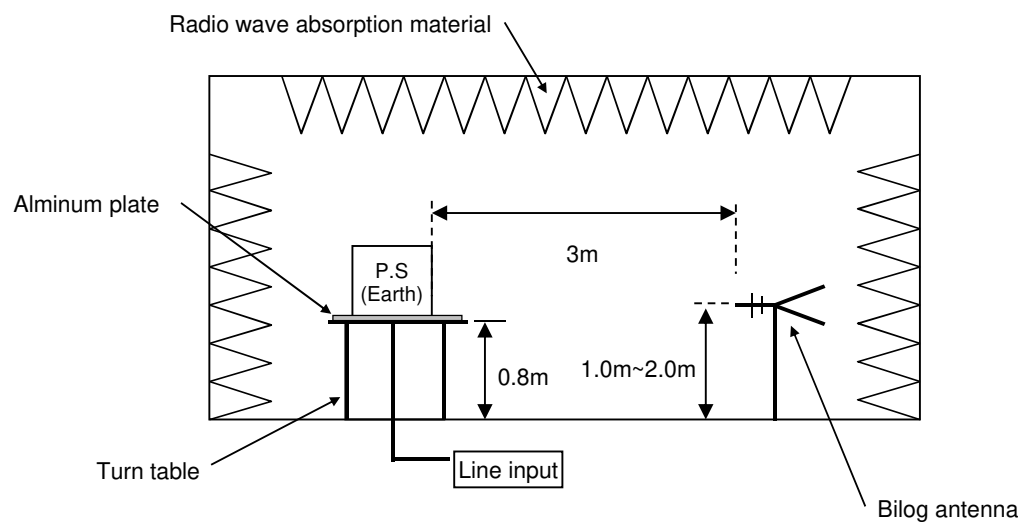

Conditions

Test : EMI
Model Name : LHA75F-36

Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

