



DATA SHEET		Date	05-Jul-21
Model	LHP150F-48-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Nakao

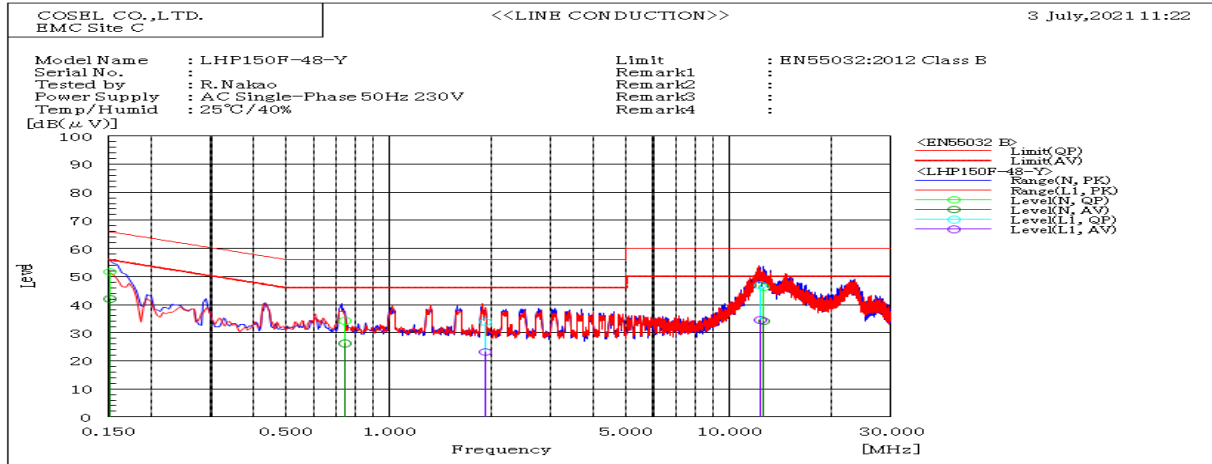


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.151	N	51.7	42.1	66.0	56.0	14.3	13.9	Pass	
0.740	N	34.3	26.2	56.0	46.0	21.7	19.8	Pass	
12.697	N	46.2	34.2	60.0	50.0	13.8	15.8	Pass	
1.931	L1	33.9	23.2	56.0	46.0	22.1	22.8	Pass	
12.383	L1	47.0	34.6	60.0	50.0	13.0	15.4	Pass	

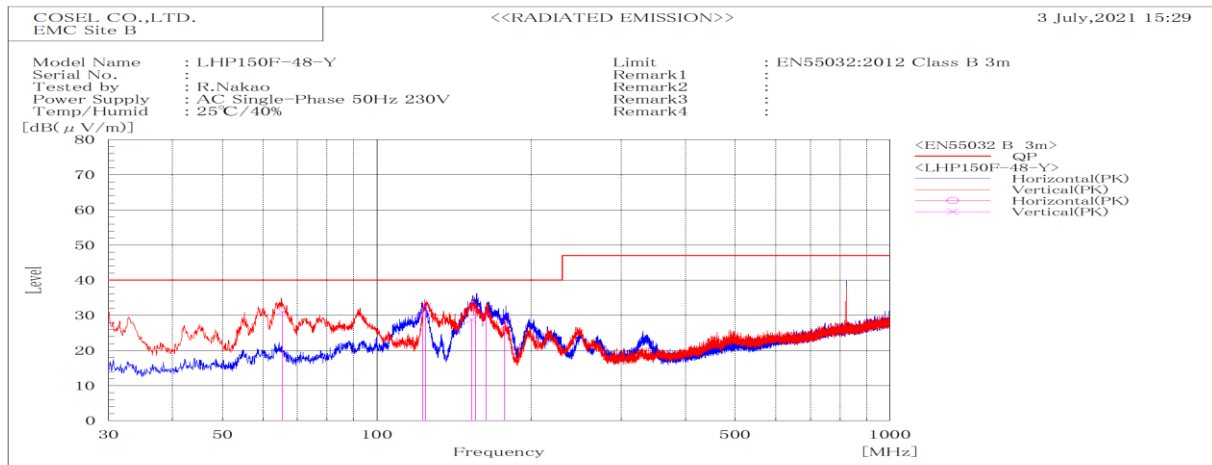


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
123.028	H	Stable	30.2	40.0	9.8	Pass	199.7	12.0	
156.015	H	Stable	32.0	40.0	8.0	Pass	199.7	328.4	
177.626	H	Stable	29.0	40.0	11.0	Pass	199.4	183.4	
65.480	V	Stable	31.0	40.0	9.0	Pass	101.7	188.8	
124.551	V	Stable	32.6	40.0	7.4	Pass	131.2	121.4	
153.158	V	Stable	28.8	40.0	11.2	Pass	100.2	6.8	
163.313	V	Stable	30.0	40.0	10.0	Pass	100.0	250.3	

DATA SHEET		Date	05-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Nakao

## 1. Line conduction

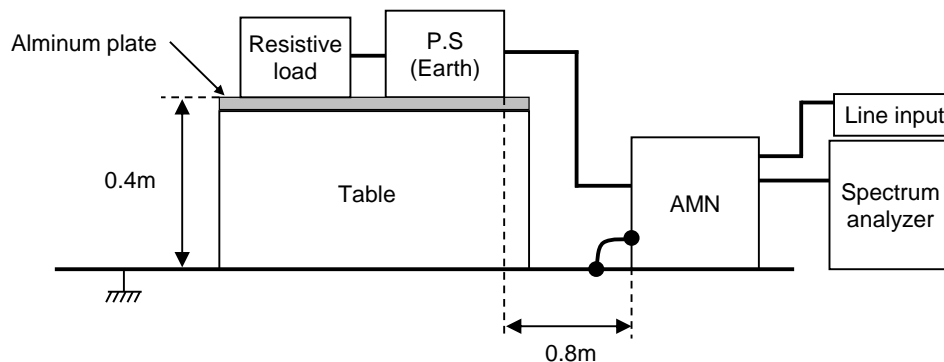

## 2. Radiated emission

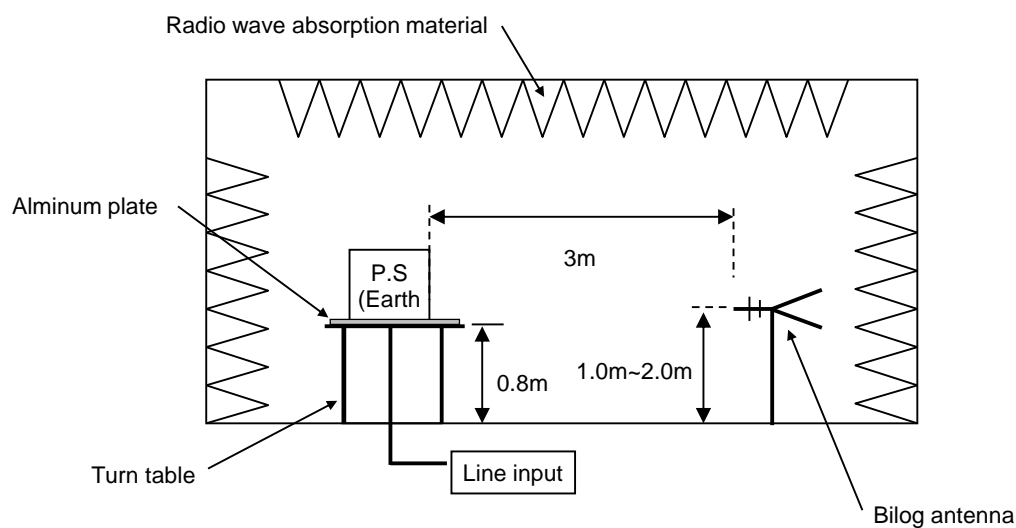


## Conditions

Test : EMI  
Model Name : LHP150F-48-Y

## Photographs of test set-up

### 1.LINE CONDUCTION

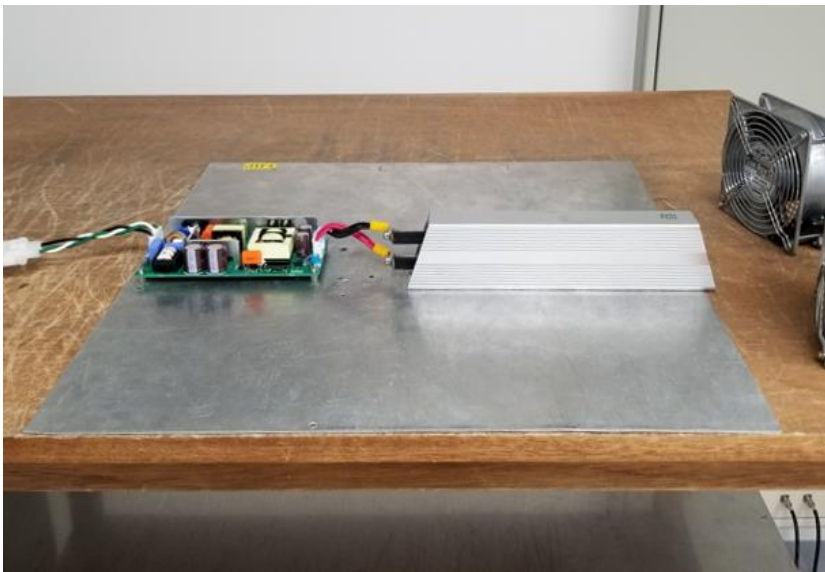

### 2.RADIATED EMISSION

