



DATA SHEET		Date	05-Jul-21
Model	LHP300F-24-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Nakao

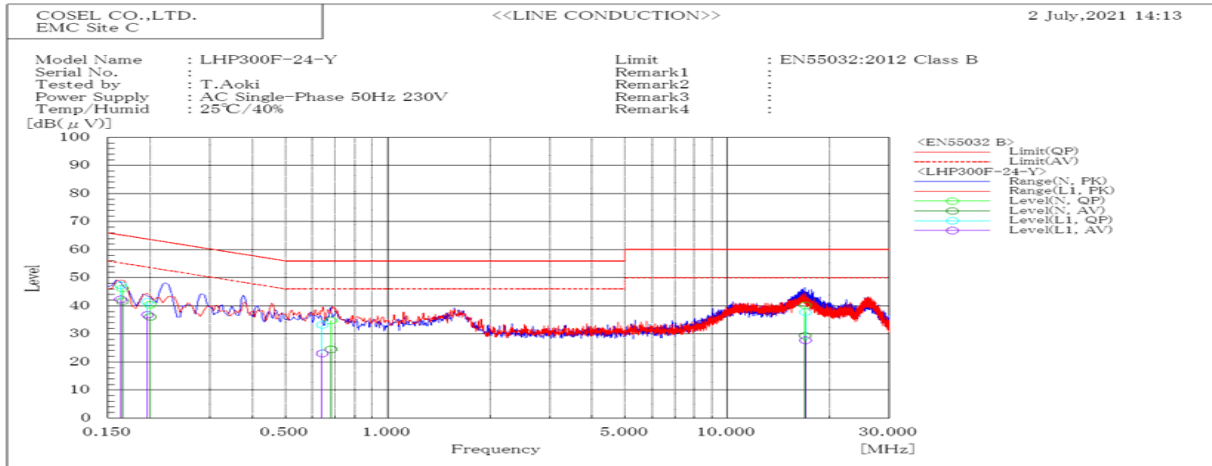


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.165	N	46.2	41.6	65.2	55.2	19.0	13.6	Pass	
0.200	N	40.4	36.1	63.6	53.6	23.2	17.5	Pass	
0.681	N	34.8	24.5	56.0	46.0	21.2	21.5	Pass	
16.963	N	40.1	29.3	60.0	50.0	19.9	20.7	Pass	
0.164	L1	47.3	42.3	65.3	55.3	18.0	13.0	Pass	
0.196	L1	41.4	36.8	63.8	53.8	22.4	17.0	Pass	
0.641	L1	33.2	23.1	56.0	46.0	22.8	22.9	Pass	
16.984	L1	37.7	27.7	60.0	50.0	22.3	22.3	Pass	

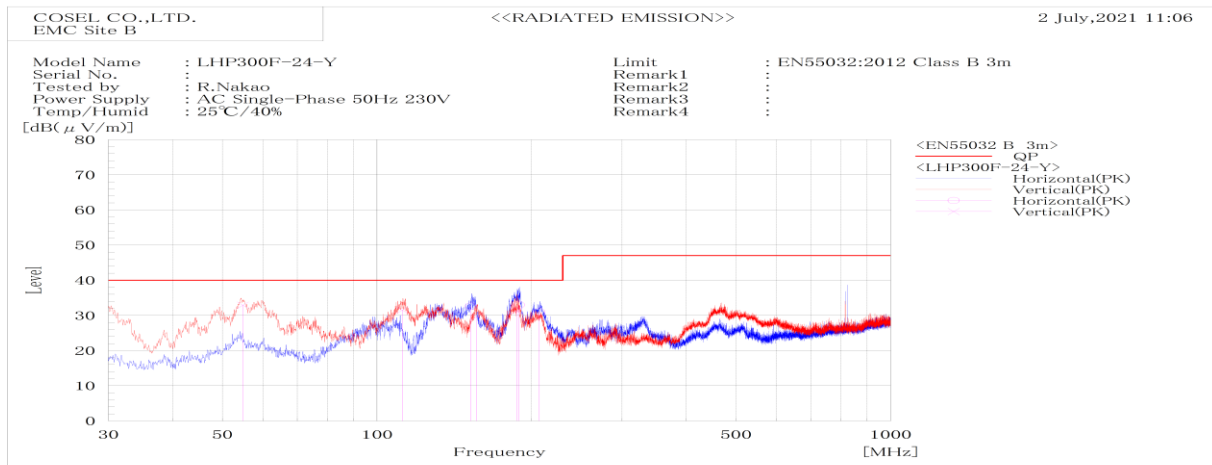


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
152.191	H	Stable	32.6	40.0	7.4	Pass	198.5	198.8	
188.951	H	Stable	33.0	40.0	7.0	Pass	198.5	175.1	
207.143	H	Stable	31.0	40.0	9.0	Pass	111.1	209.9	
54.818	V	Stable	32.9	40.0	7.1	Pass	100.2	26.9	
111.963	V	Stable	31.5	40.0	8.5	Pass	107.3	95.1	
156.527	V	Stable	29.7	40.0	10.3	Pass	100.2	52.8	
187.075	V	Stable	31.2	40.0	8.8	Pass	100.2	237.9	

DATA SHEET		Date	05-Jul-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	R.Nakao

1. Line conduction

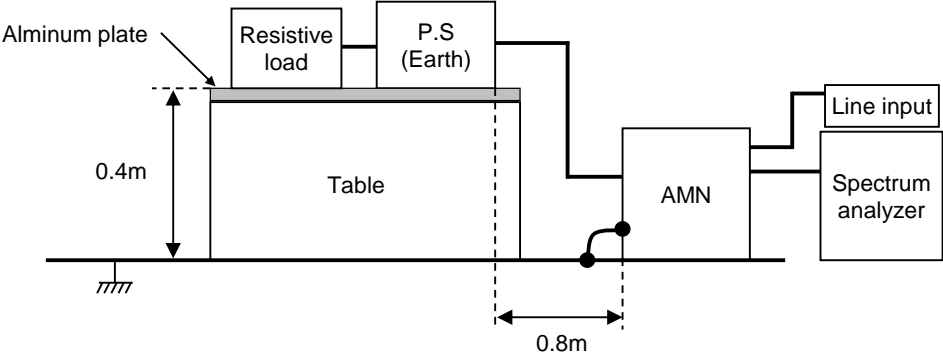

2. Radiated emission

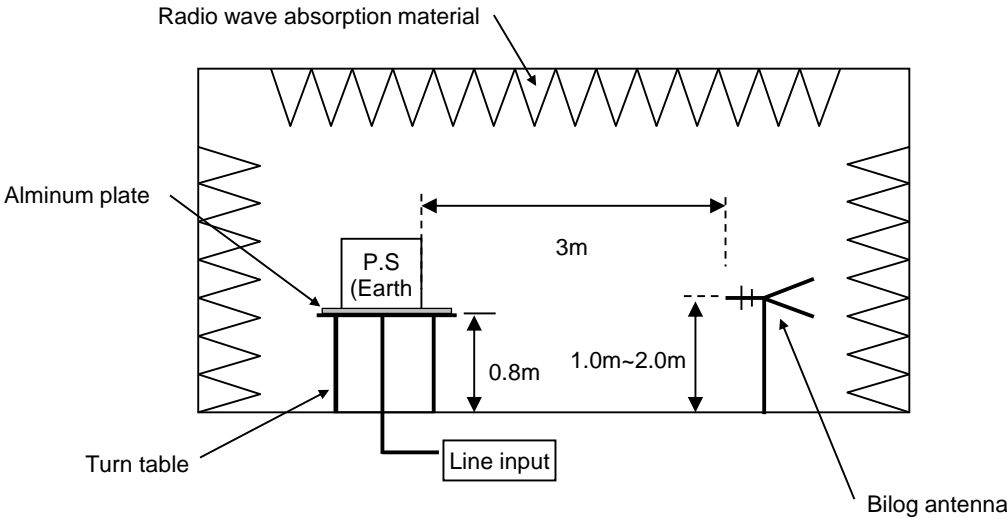


## Conditions

Test : EMI  
Model Name : LHP300F-24-Y

## Photographs of test set-up

### 1.LINE CONDUCTION

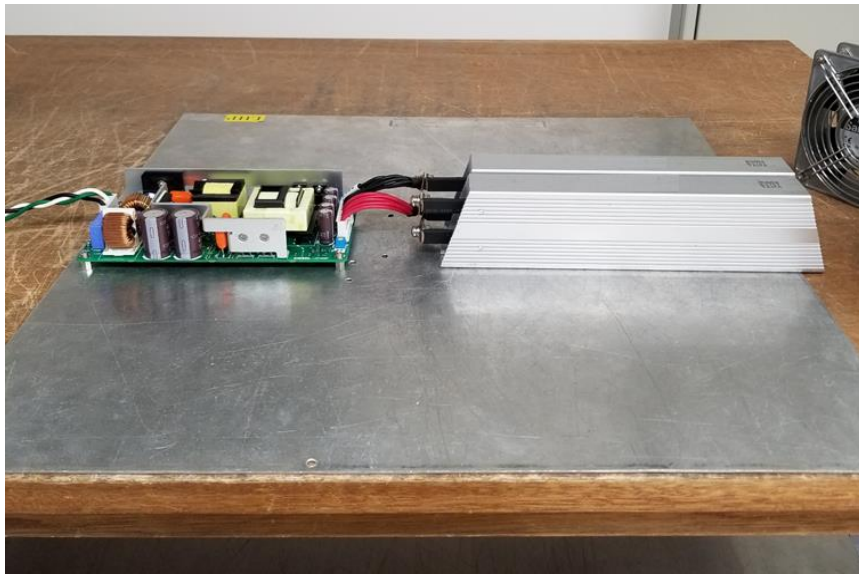

### 2.RADIATED EMISSION

