

Temperature increase of main components

Model: MGFW4048□□


1. Conditions

- (1) Input :DC 48 [V]
 (2) Output :Rated output
 (3) Cooling method :Convection cooling
 (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

Table 2.1 Temperature increase of main components						
No.	Parts name	Symbol No.	Increase (ΔT)		Rated temp. [°C]	Reference
			[deg]			
			±12V	±15V		
1	Switching MOS-FET	TR101	53	47	150	Junction Temp.
2	Input Choke Coil	L101	45	41	125	
3	Rectified MOS-FET(Output)	TR501	51	44	150	Junction Temp.
4	Output Choke Coil	L501	46	41	125	
5	Rectified MOS-FET(Output)	TR511	52	43	150	Junction Temp.
6	Output Choke Coil	L511	46	42	125	
7	CASE	CASE	44	42	110	Top Surface Center
8						
9						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						

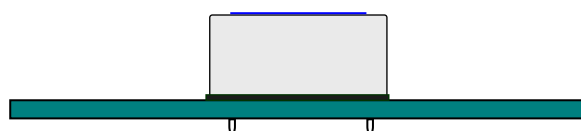

(Side view)

Fig.1.1 Mounting method
(Normal position)