

Temperature increase of main components

Model: MGW1524□□

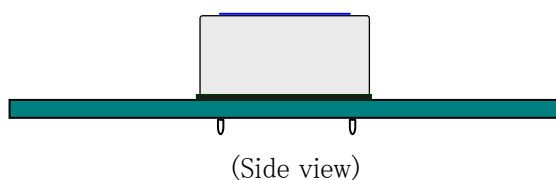
1. Conditions

- (1) Input :DC 24 [V]
 (2) Output :Rated output
 (3) Cooling method :Convection cooling
 (4) Mounting method :Shown as Fig.1.1

2. Result

Table 2.1 Temperature increase of main components

Table 2.1 Temperature increase of main components							
No.	Parts name	Symbol No.	Increase (ΔT)			Rated temp. [°C]	Reference
			[deg]				
			$\pm 5V$	$\pm 12V$	$\pm 15V$		
1	Transformer	T101	71	51	46	155	
2	Switching MOS-FET	TR101	61	51	48	150	Junction Temp.
3	Rectified Diode(Output)	D201	62	48	42	150	Junction Temp.
4	Output Choke Coil	L201	62	46	40	130	
5	Bipolar Transistor	TR113	55	48	44	150	Junction Temp.
6	Case	—	54	42	37	—	
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							

Fig.1.1 Mounting method
(Normal position)