



DATA SHEET		Date	15-May-25
Model	MUS6053R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Kawaguchi

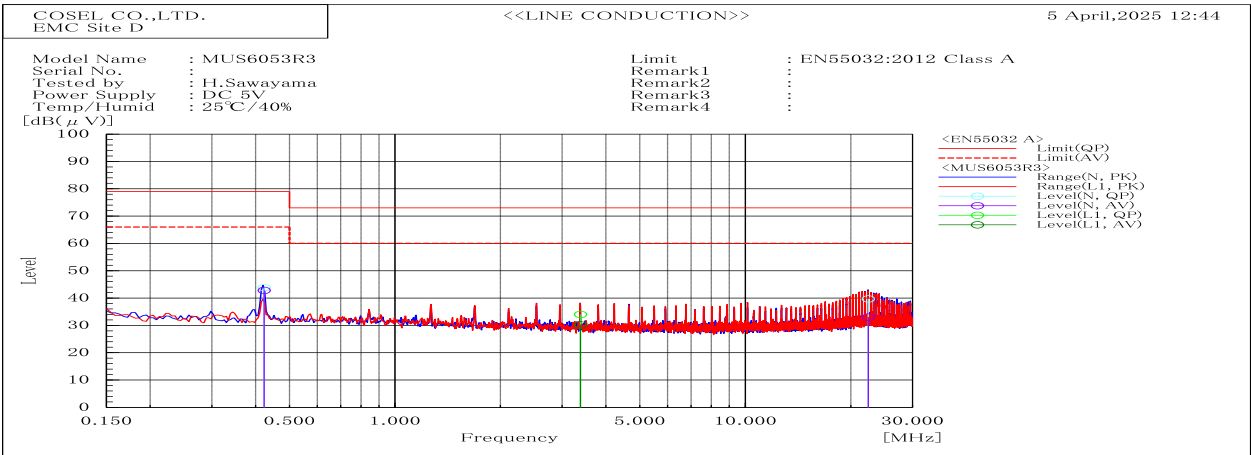


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
3.386	L1	34	30.2	73	60	39	29.8	Pass	
0.423	N	43.8	42.8	79	66	35.2	23.2	Pass	
22.431	N	39.7	33	73	60	33.3	27	Pass	

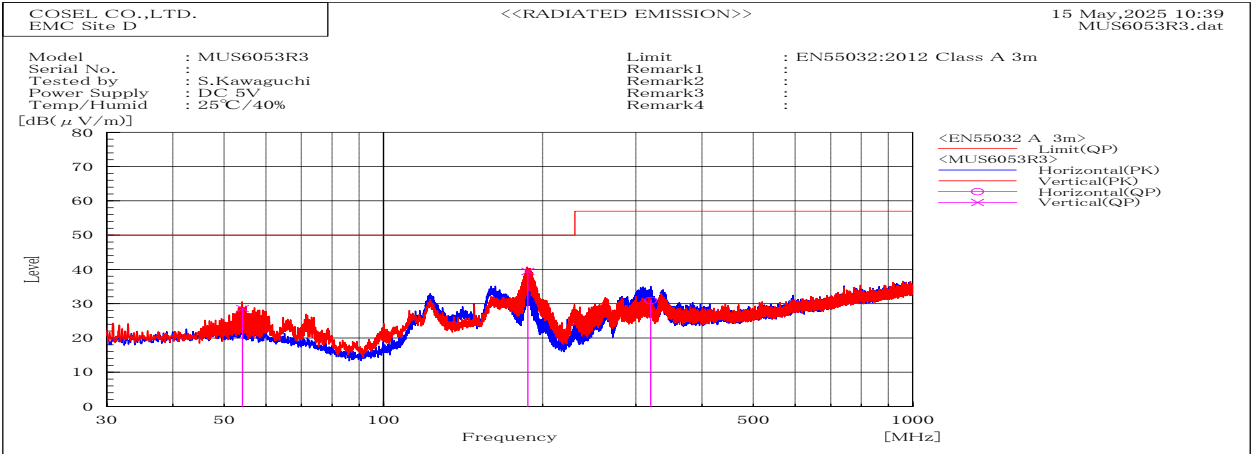


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV/m) QP	dB(uV/m) QP	dB QP				
187.417	V	Stable	39.4	50	10.6	Pass	100.2	30.7	
54.155	V	Stable	28.6	50	21.4	Pass	100.4	148.8	
319.859	H	Stable	30.9	57	26.1	Pass	100.6	100.4	

DATA SHEET		Date	15-May-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Kawaguchi

1. Line conduction

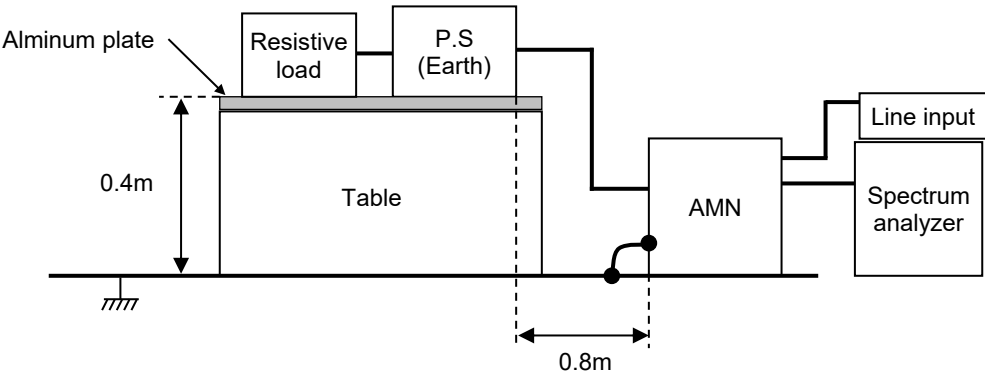

2. Radiated emission

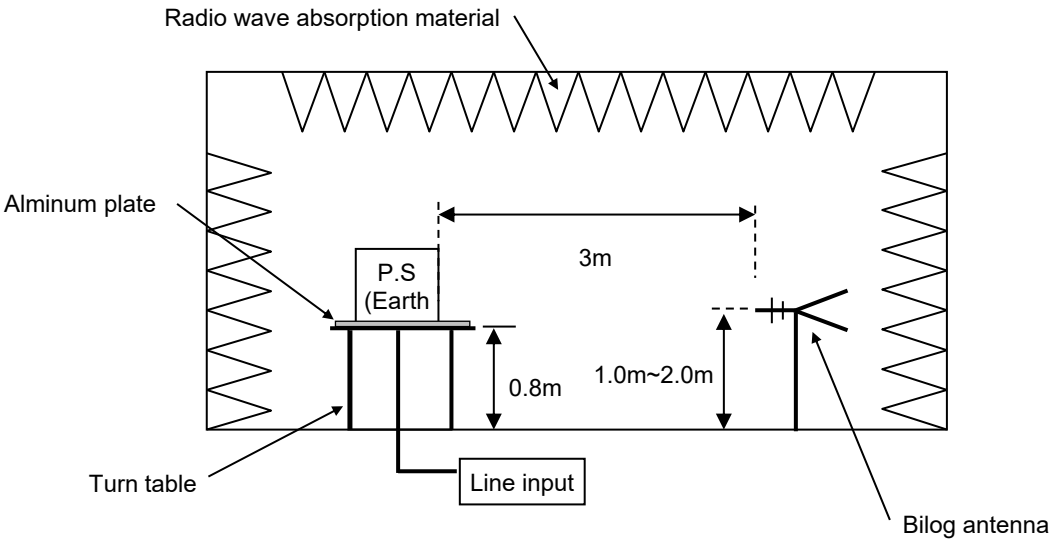

Conditions


Test : EMI
Model Name: MUS6□□

○Photographs of Test Set-Up

LINE CONDUCTION



RADIATED EMISSION

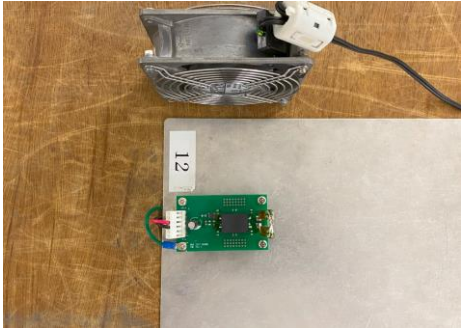

○Testing circuitry

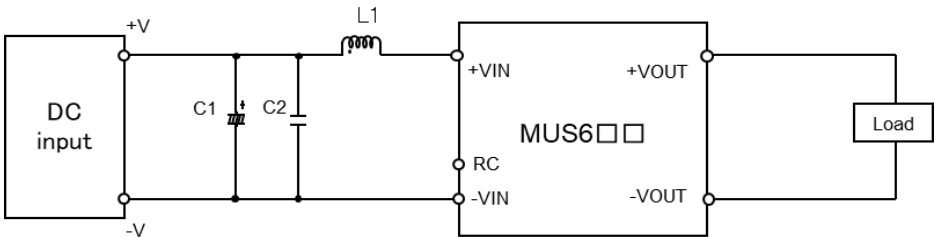


Fig.1 MUS6□□ Testing circuitry

C1 :	MUS605□	16V 220 μ F	Electric capacitor (UPWseries NICHICON)
	MUS612□	50V 100 μ F	Electric capacitor (UPWseries NICHICON)
	MUS624□	—	
	MUS648□	—	
C2 :	MUS605□	16V 22 μ F	Ceramic capacitor (GRM31CC71C226M MURATA MANUFACTURING)
	MUS612□	25V 10 μ F	Ceramic capacitor (CM316X7R106K25AT KYOCERA)
	MUS624□	50V 4.7 μ F	Ceramic capacitor (GRM31CR71H475K MURATA MANUFACTURING)
	MUS648□	100V 2.2 μ F	Ceramic capacitor (C3216X7S2A225KT TDK)
L1 :	MUS605□	6500mA 1.5 μ H	Inductor(LQH5BPN1R5N38 MURATA MANUFACTURING)
	MUS612□	5000mA 2.2 μ H	Inductor(LQH5BPN2R2N38 MURATA MANUFACTURING)
	MUS624□	2600mA 10 μ H	Inductor(LQH5BPN100M38 MURATA MANUFACTURING)
	MUS648□	1600mA 22 μ H	Inductor(LQH5BPN220M38 MURATA MANUFACTURING)