

TEST DATA OF NAP-06-□□□

Noise Filter

Apr. 22. 2005

Approved by : Toshio Watanabe
Toshio Watanabe Design Manager

Prepared by : Tadayuki Noda
Tadayuki Noda Design Engineer

COSEL CO.,LTD.



CONTENTS

1.Attenuation Characteristics	1
2.Pulse Attenuation Characteristics	6
3.Leakage Current	9
4.Figure of Testing Circuitry	10

(Final Page 11)



COSEL

Model	NAP-06-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

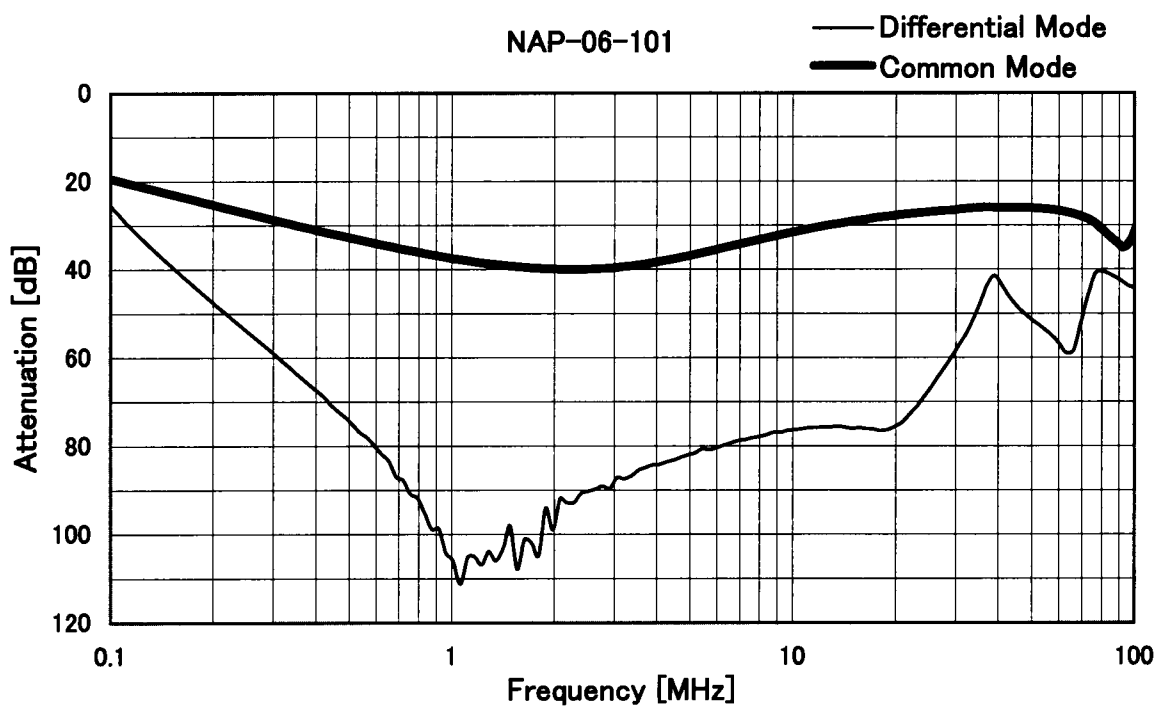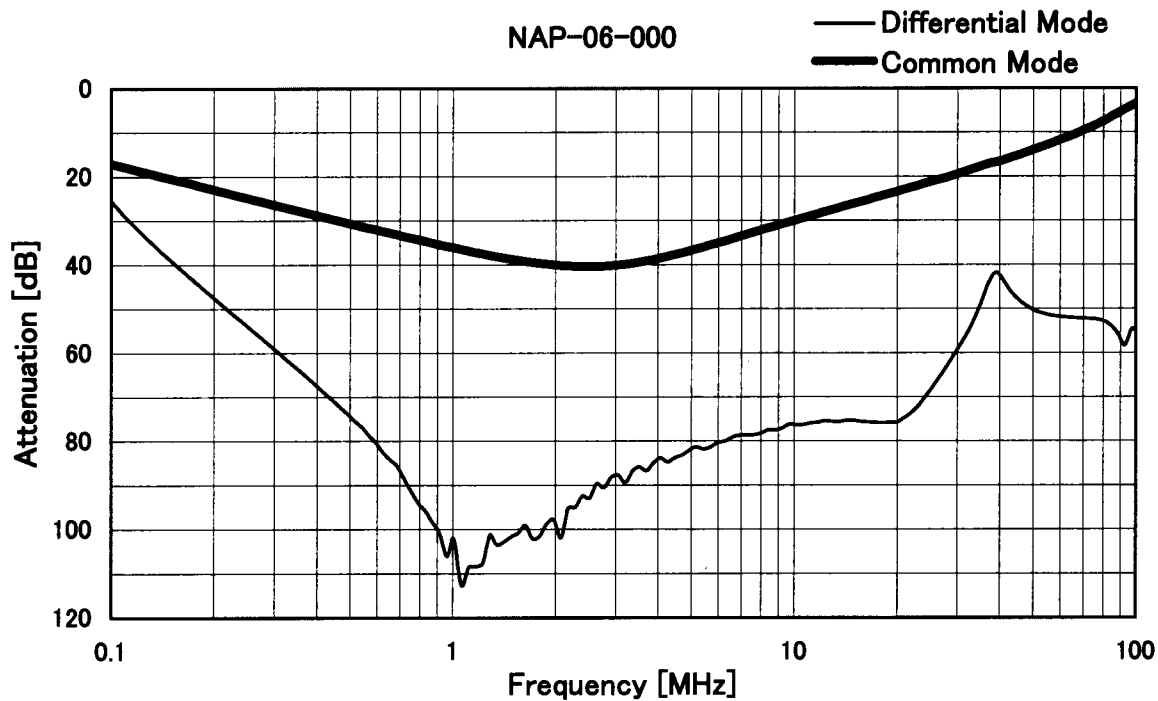



COSEL

Model	NAP-06-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

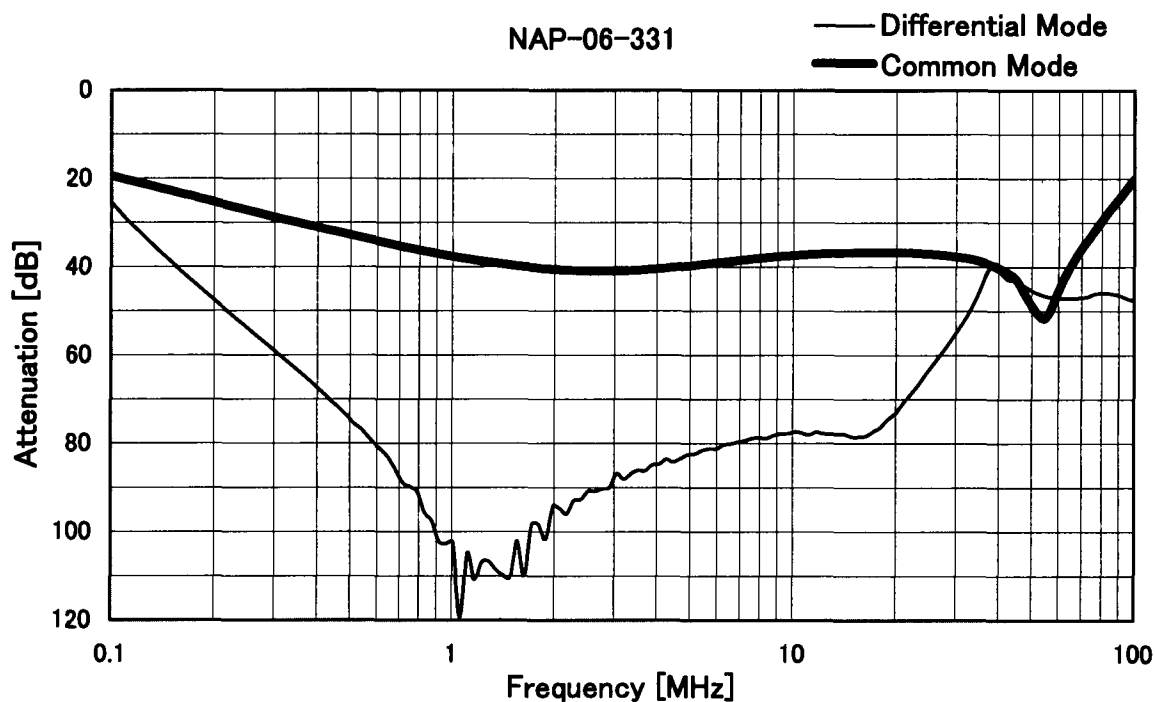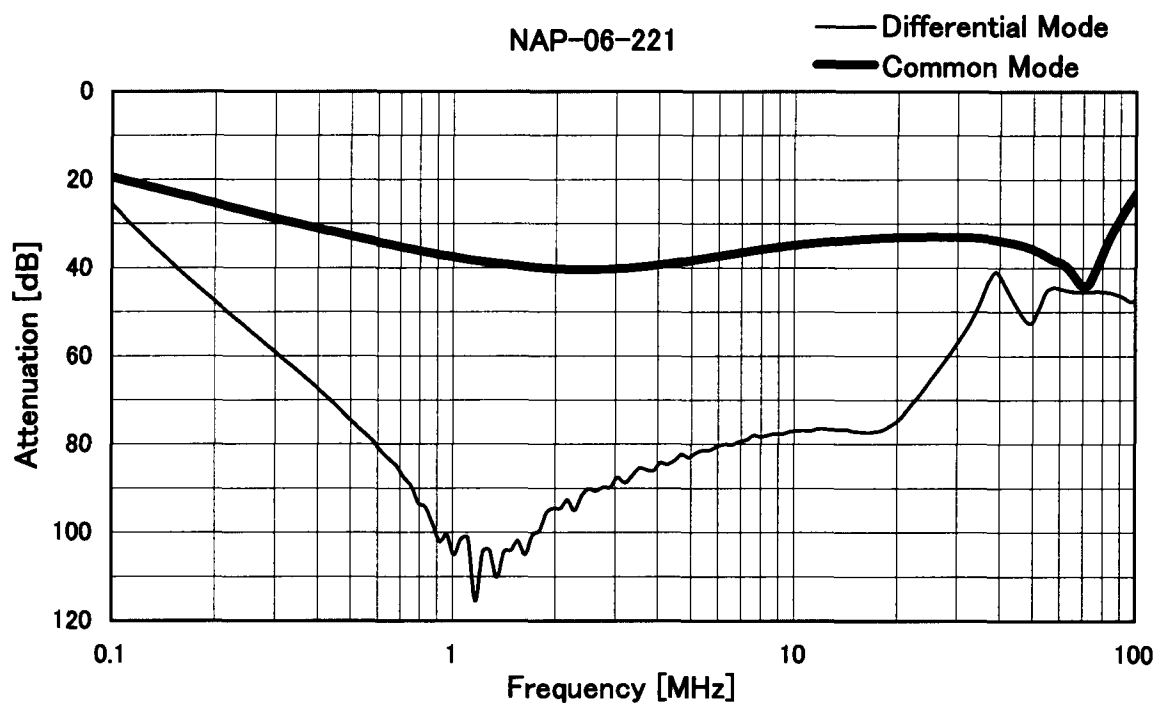



COSEL

Model	NAP-06-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

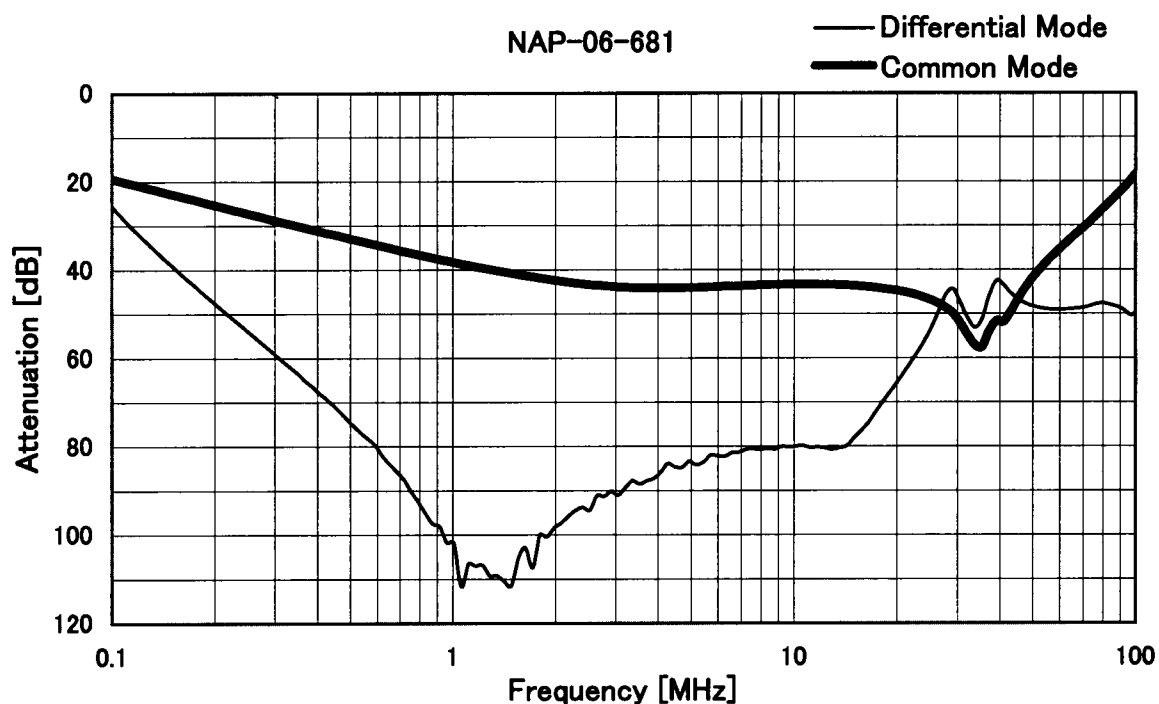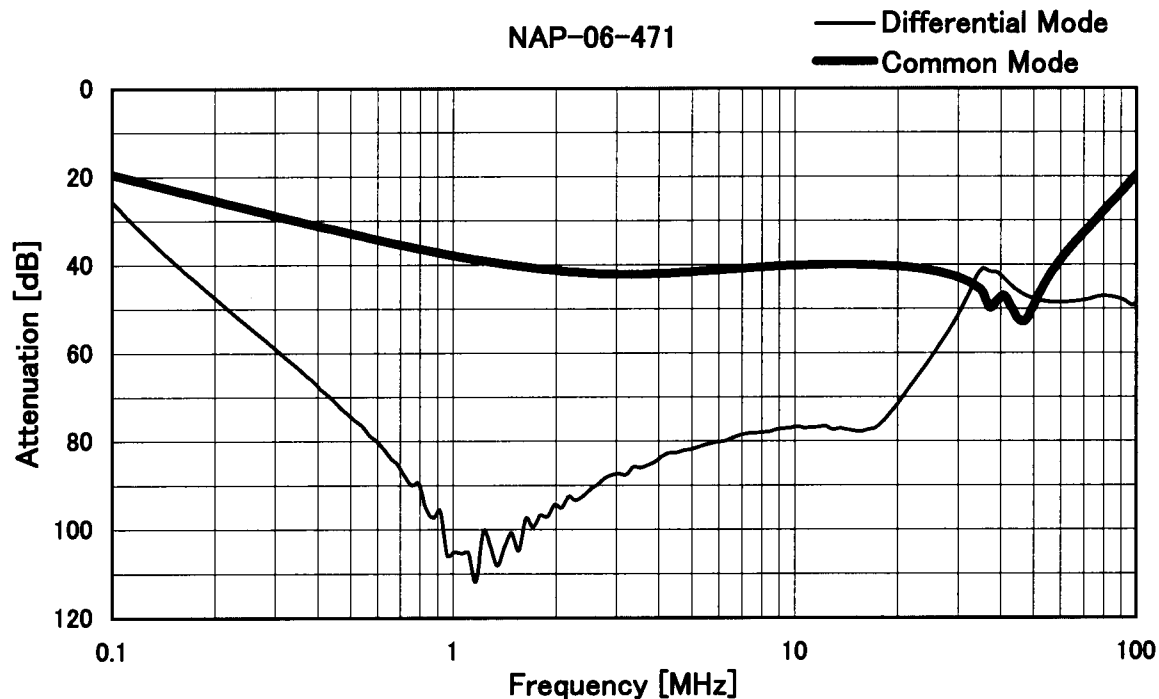



COSEL

Model	NAP-06-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		



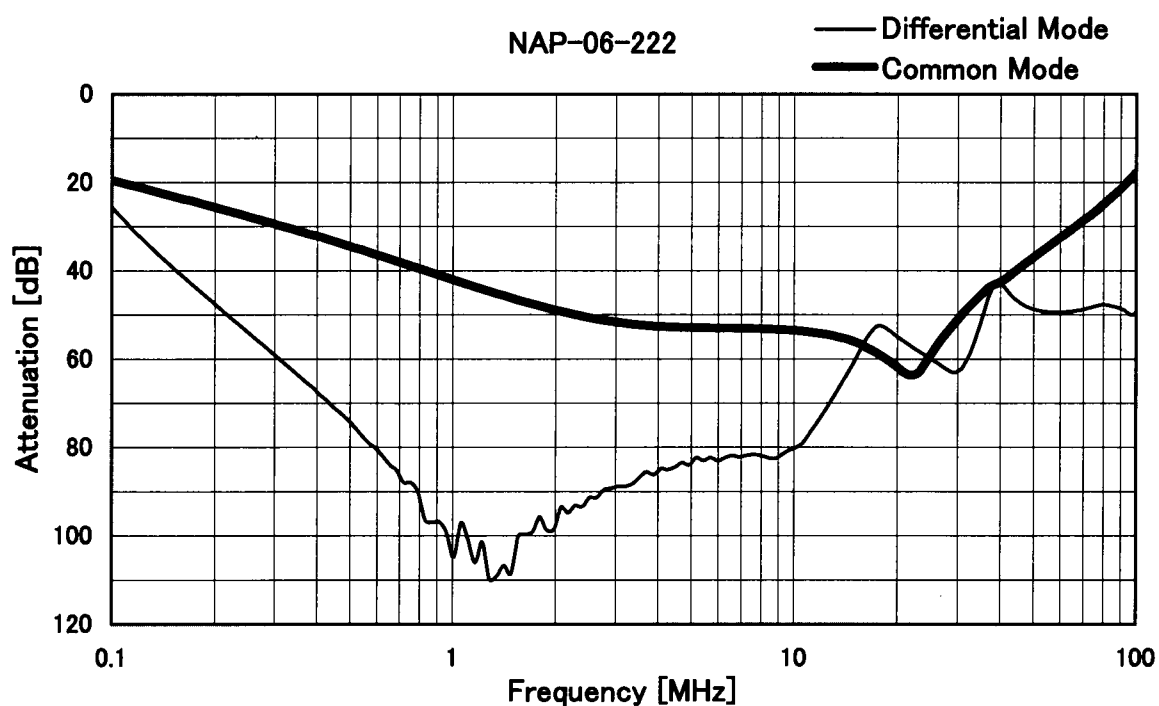
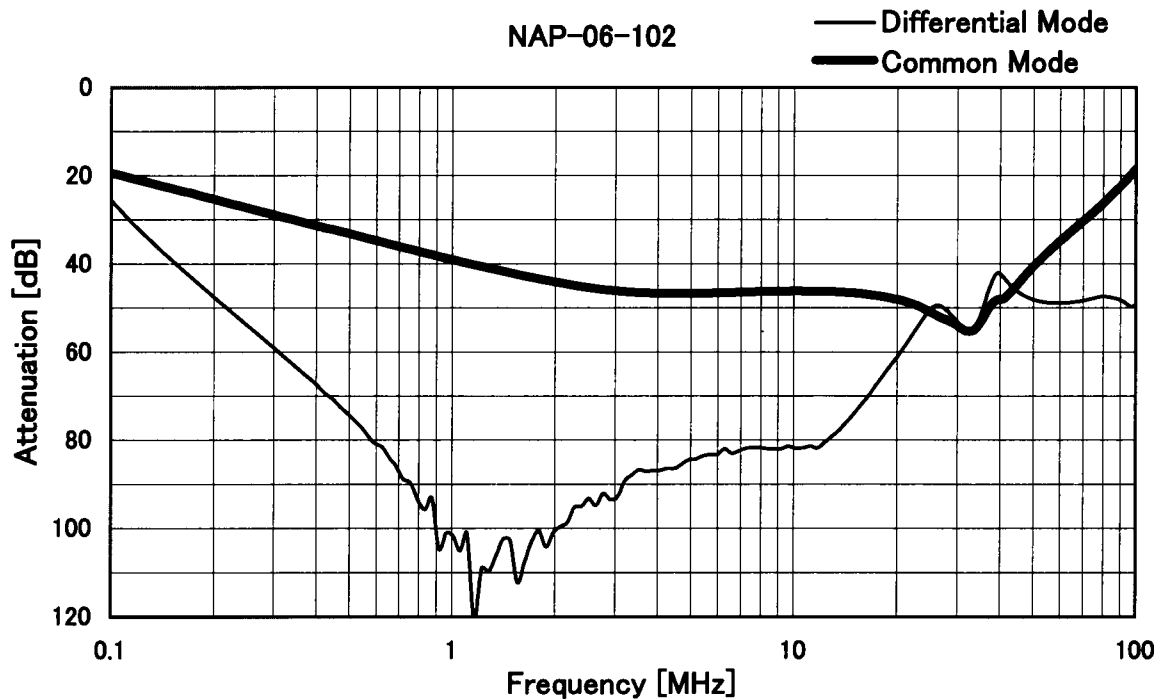


COSEL

Model	NAP-06-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		



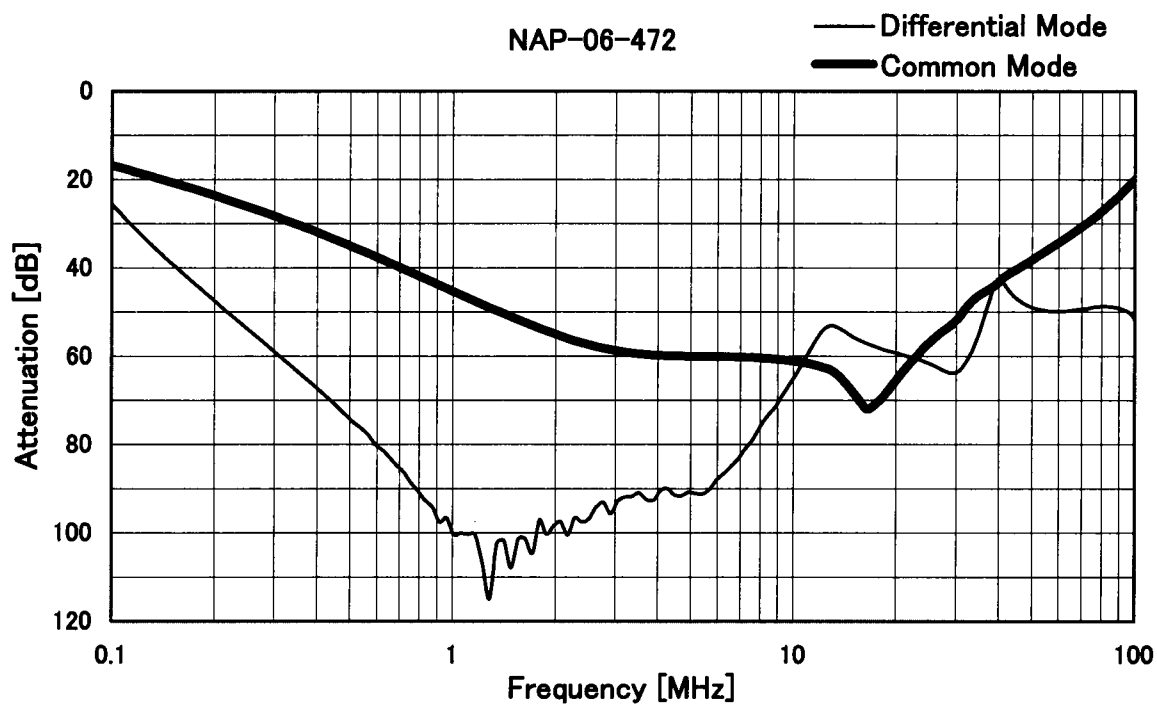
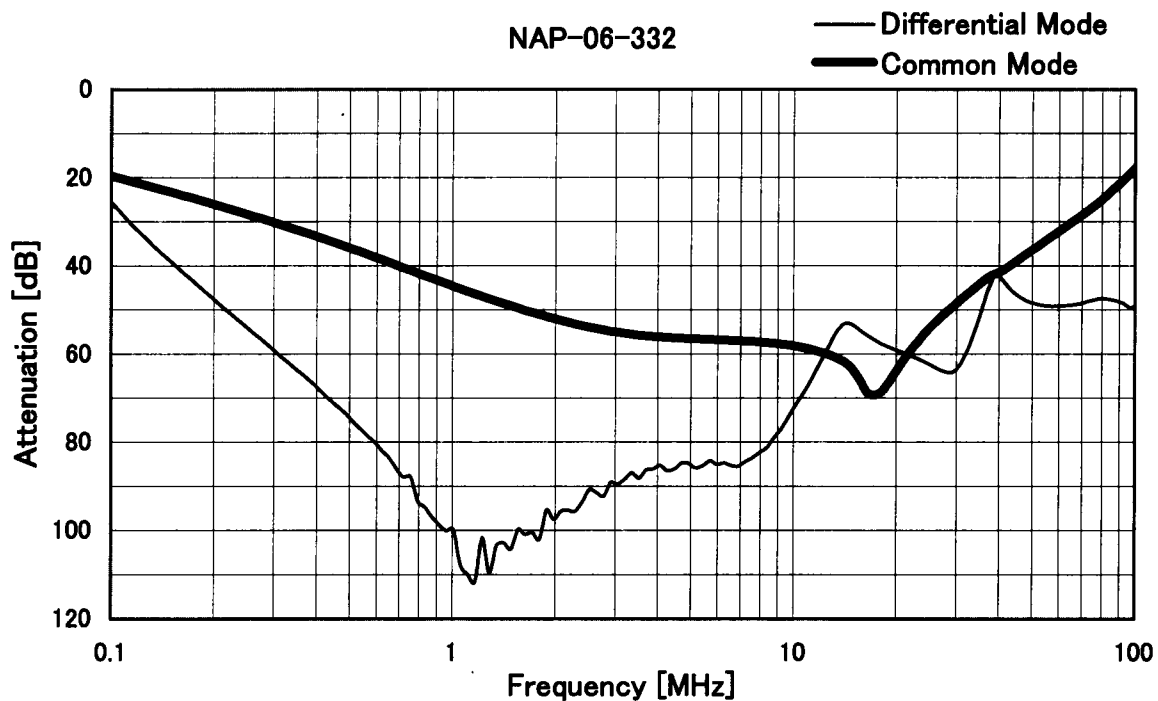


Model	NAP-06-□□□	Temperature	25°C
Item	Pulse Attenuation Characteristics	Testing Circuitry	Figure B
Object	_____		

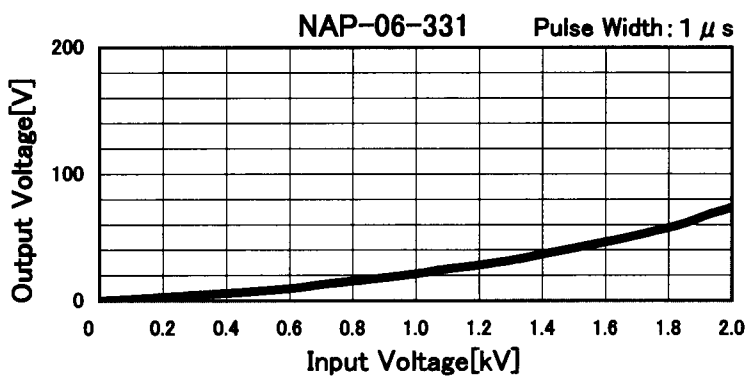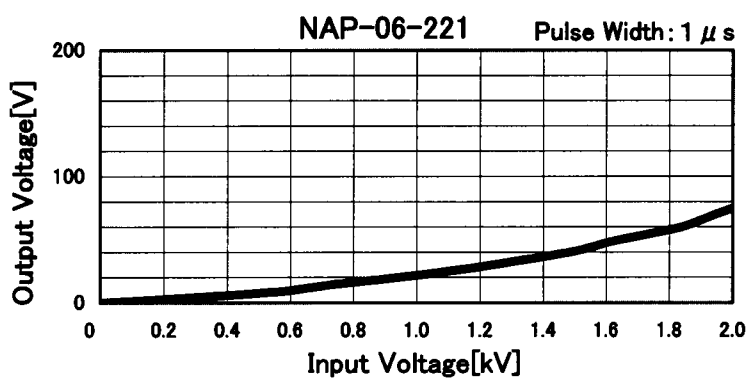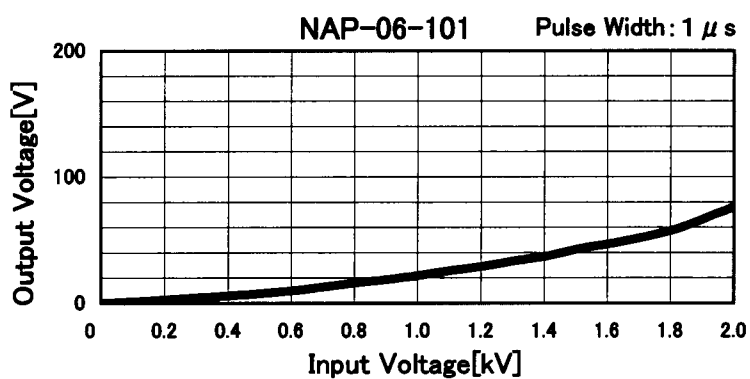
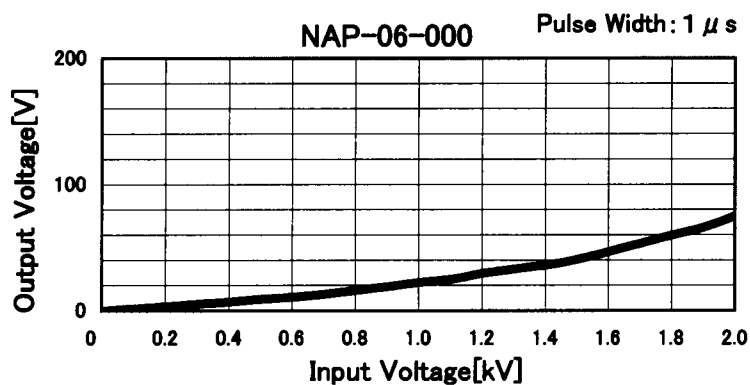


COSEL

Model	NAP-06-□□□	Temperature 25°C Testing Circuitry Figure B
Item	Pulse Attenuation Characteristics	
Object	_____	

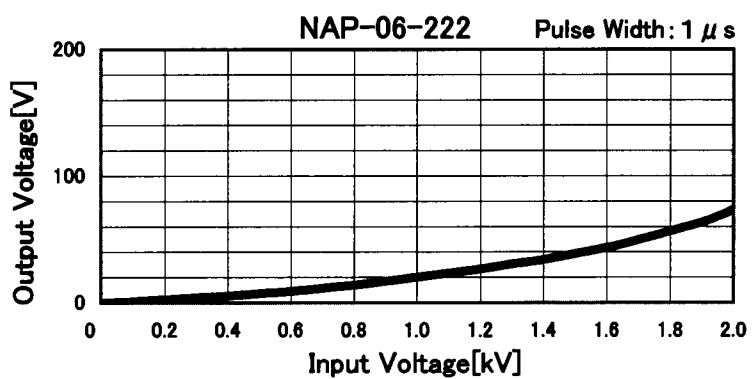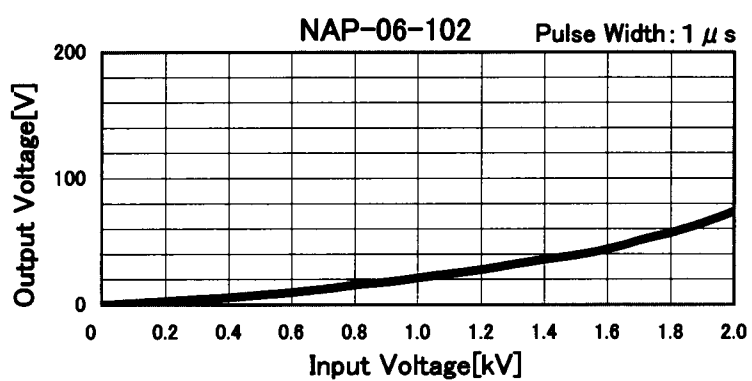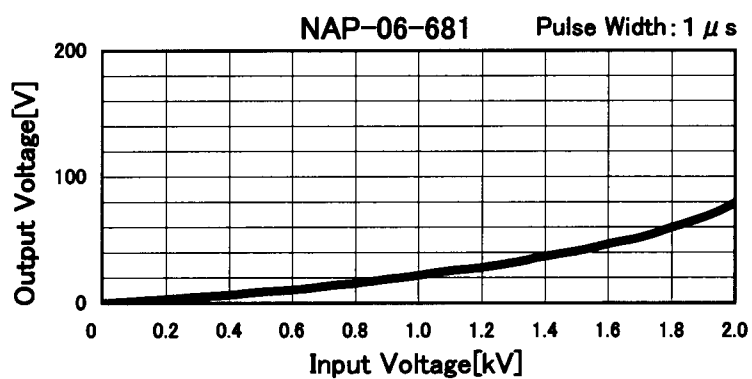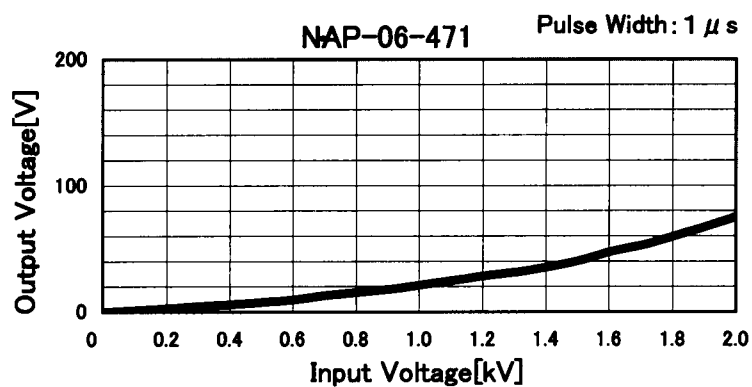

Model	NAP-06-□□□	Temperature	25°C
Item	Pulse Attenuation Characteristics	Testing Circuitry	Figure B
Object			

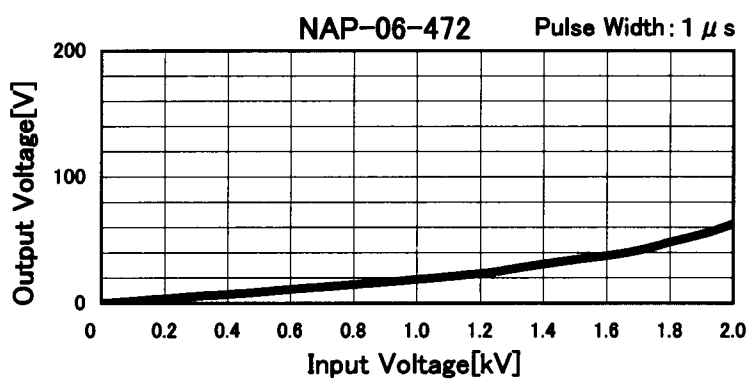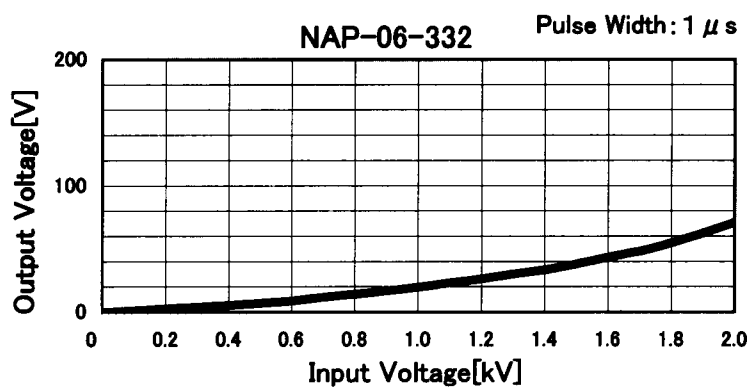

COSEL

Model		NAP-06-□□□	Temperature 25°C Testing Circuitry Figure C
Item		Leakage Current	
Object		_____	

1.Results

[mA]

Model	Standards	Input Volt.				Note
		100 [V]	125 [V]	230 [V]	250 [V]	
NAP-06-000	UL1283	0.002	0.002	0.004	0.005	
NAP-06-101	UL1283	0.006	0.007	0.013	0.015	
NAP-06-221	UL1283	0.011	0.013	0.025	0.028	
NAP-06-331	UL1283	0.015	0.019	0.038	0.042	
NAP-06-471	UL1283	0.023	0.030	0.061	0.069	
NAP-06-681	UL1283	0.031	0.040	0.082	0.093	
NAP-06-102	UL1283	0.044	0.056	0.110	0.120	
NAP-06-222	UL1283	0.090	0.120	0.230	0.250	
NAP-06-332	UL1283	0.130	0.170	0.340	0.370	
NAP-06-472	UL1283	0.190	0.240	0.480	0.520	

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

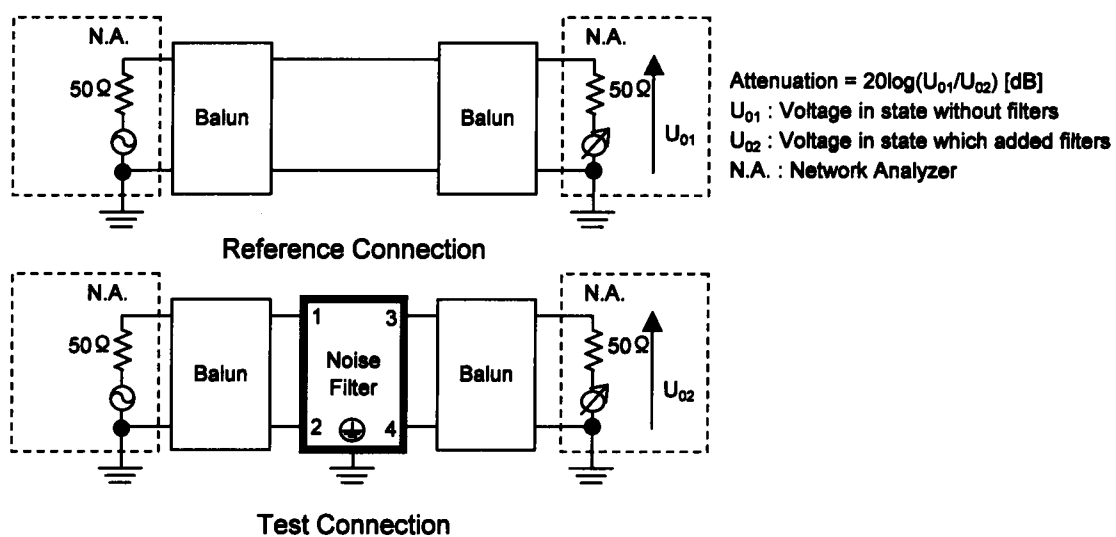


Figure A - 1 Differential mode attenuation measurement


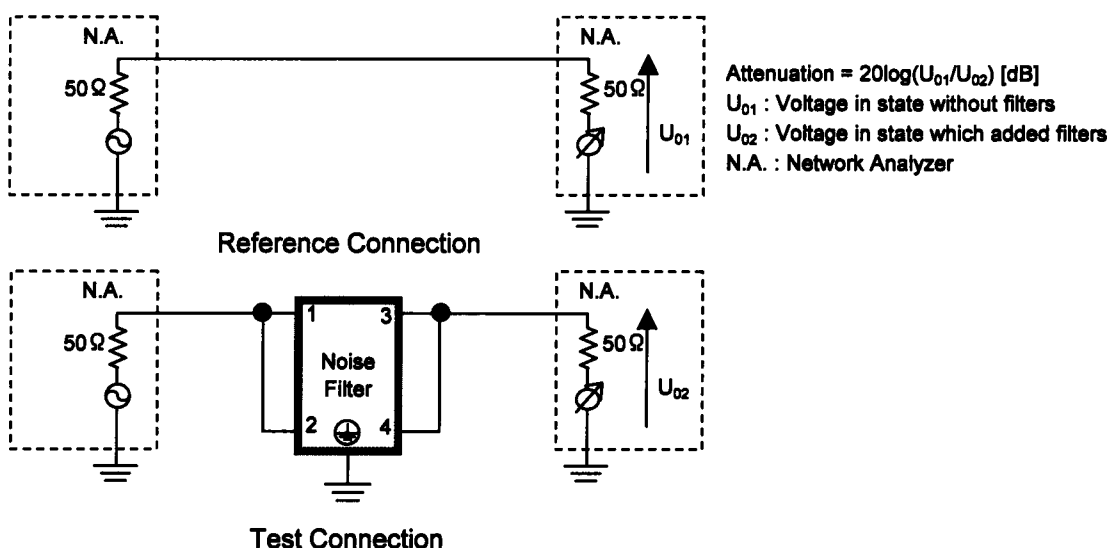


Figure A - 2 Common mode attenuation measurement

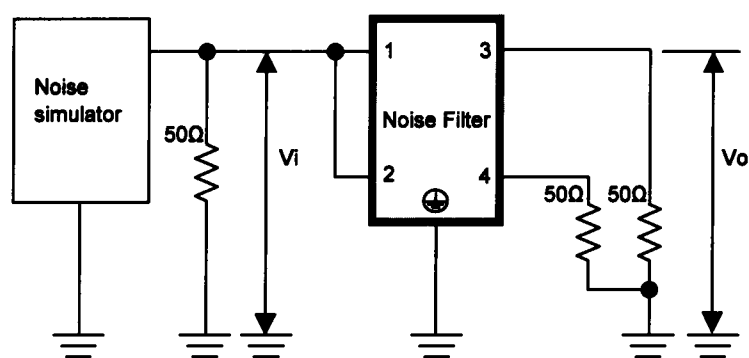

Pulse attenuation measurement

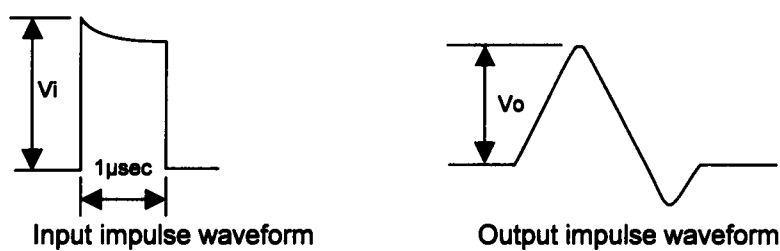


Figure B Pulse attenuation measurement

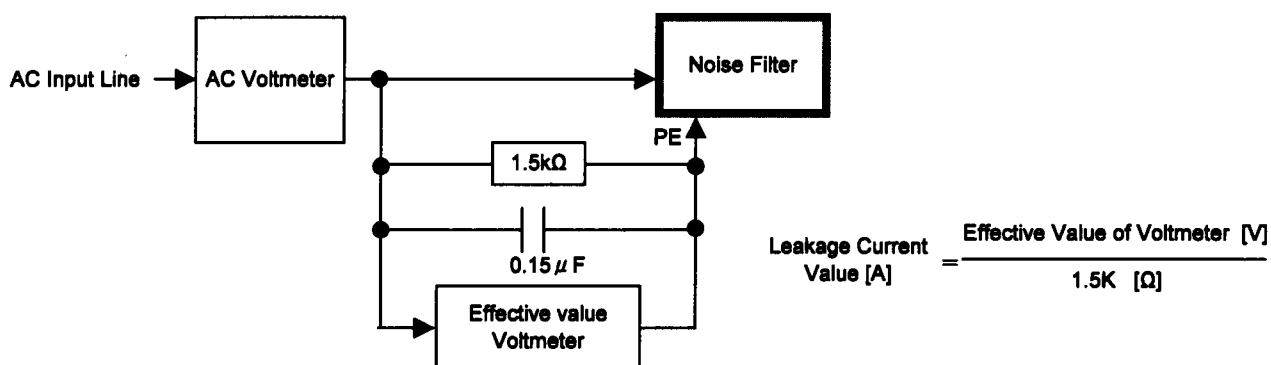


Figure C Leakage current measurement (UL1283)