



EXTRA TEST DATA OF PBA150F-24

*Regulated DC Power Supply
Jun, 09, 2020*




COSEL CO.,LTD.

CONTENTS




1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Overtoltage Protection (waveform)	3
4.Hiccup cycle (by Overcurrent Protection)	4
5.Power Consumption (by Input Voltage)	5
6.Figure of Testing Circuitry	6

(Final Page 6)

Model	PBA150F-24		
Item	Inrush Current (enlargement)	Temperature	25°C
Object		Testing Circuitry	A

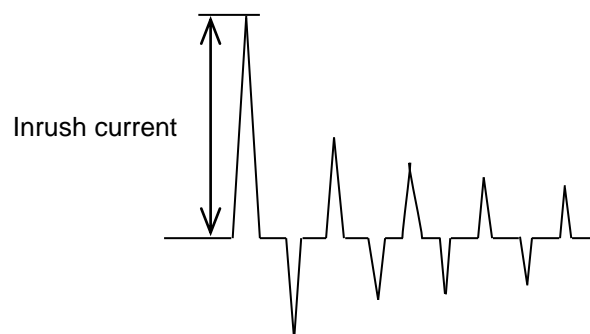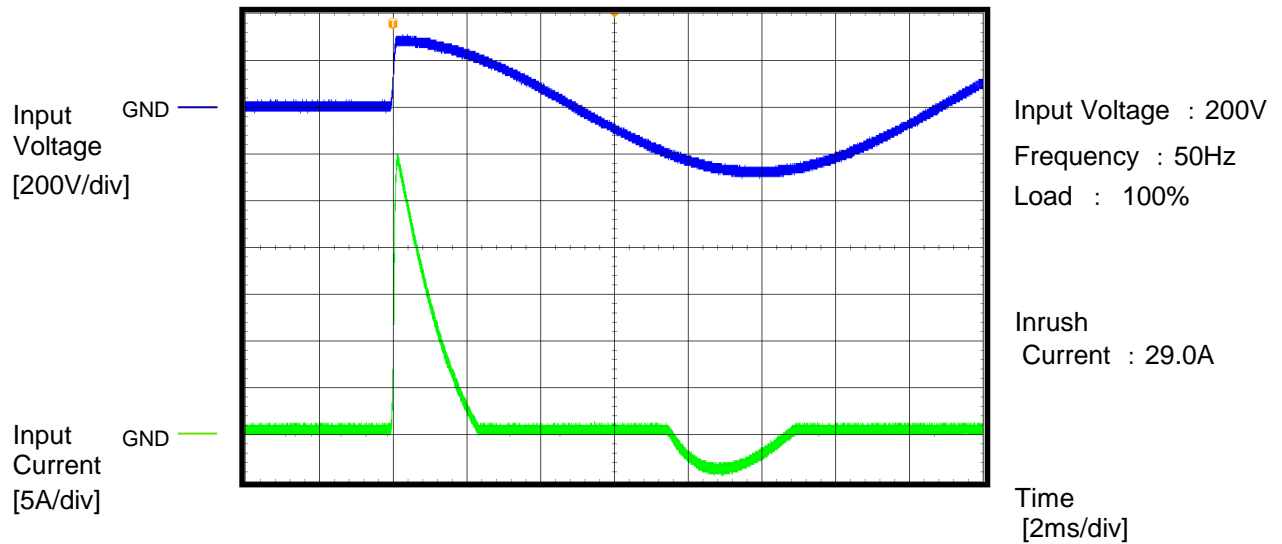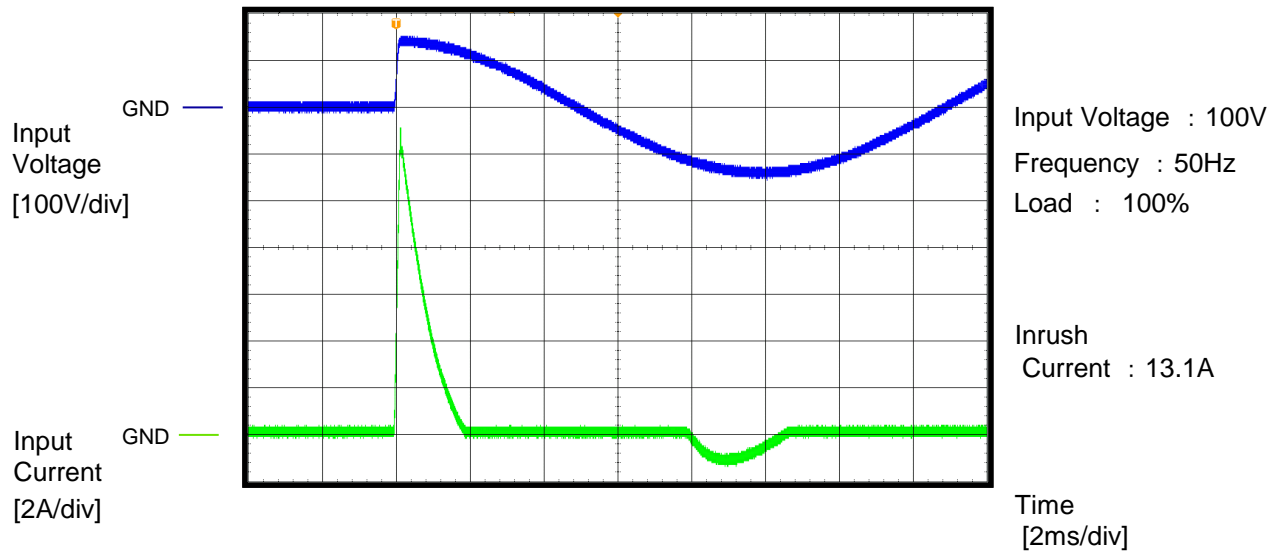


Model	PBA150F-24	Temperature 25°C Testing Circuitry A	
Item	Dynamic Line Regulation		
Object	_____		

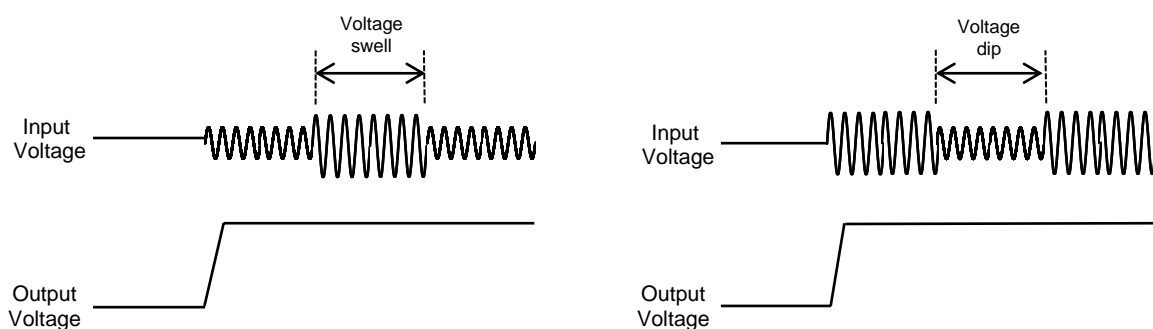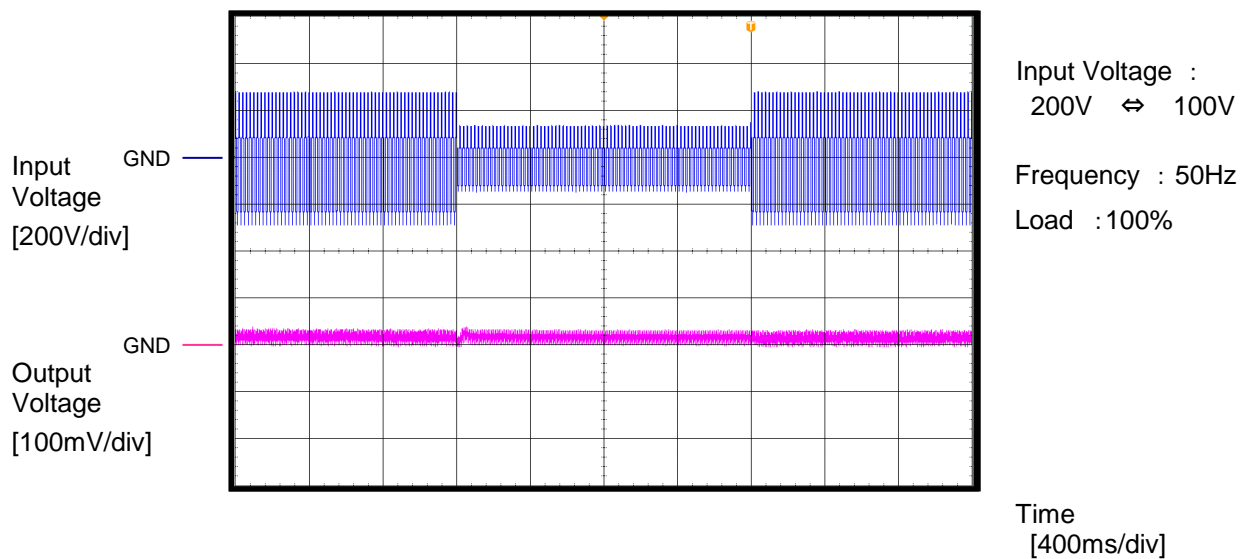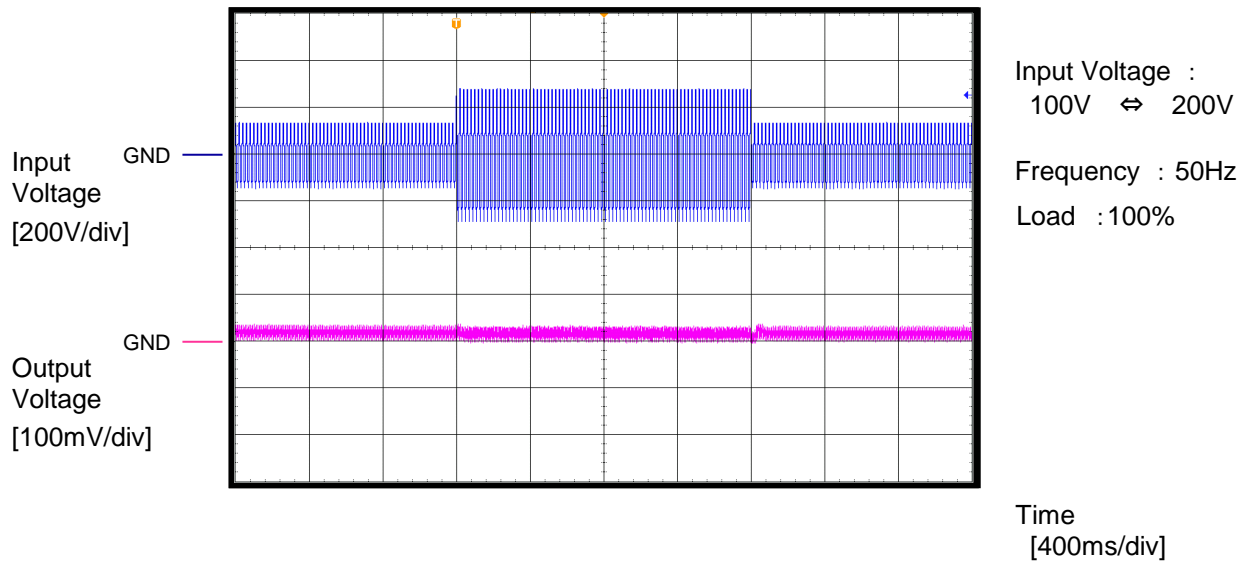

		Temperature 25°C Testing Circuitry A Input Voltage : 100V
Model	PBA150F-24	
Item	Over Voltage Protection	
Object	_____	

Output Voltage
[5V/div]

GND

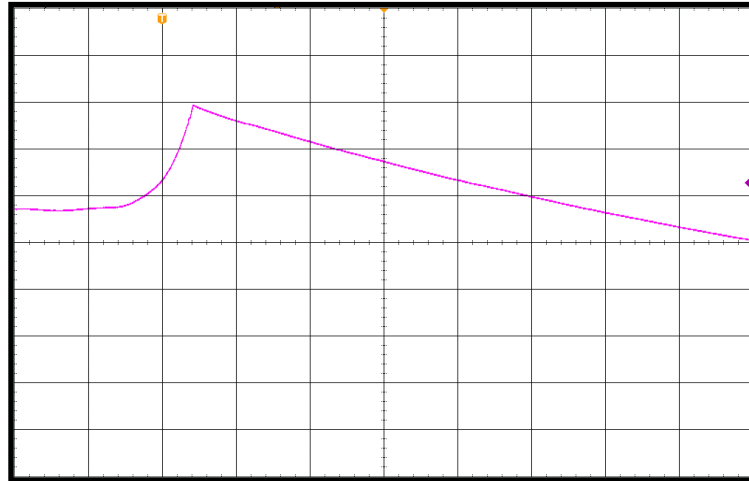


Load : 0%

Overvoltage protection
value : 34.7V

Time
[40ms/div]

Output Voltage
[5V/div]


GND

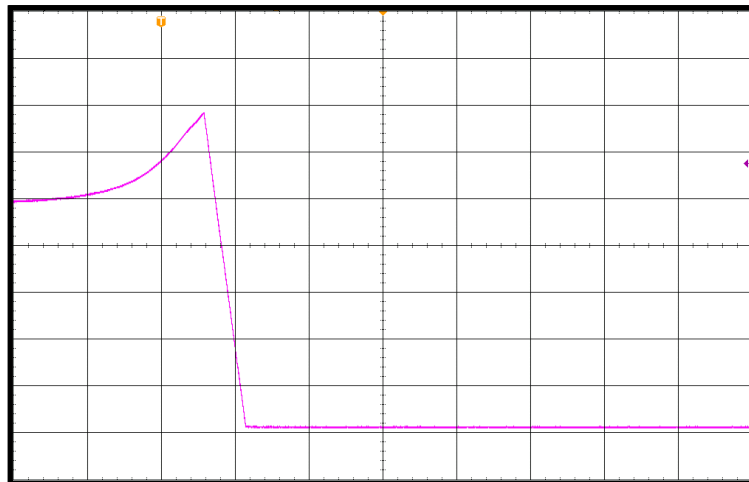


Load : 100%

Overvoltage protection
value : 34.7V

Time
[20ms/div]

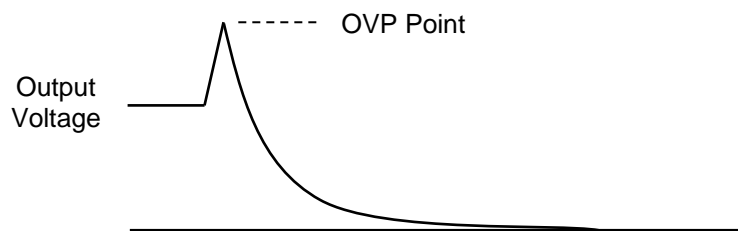

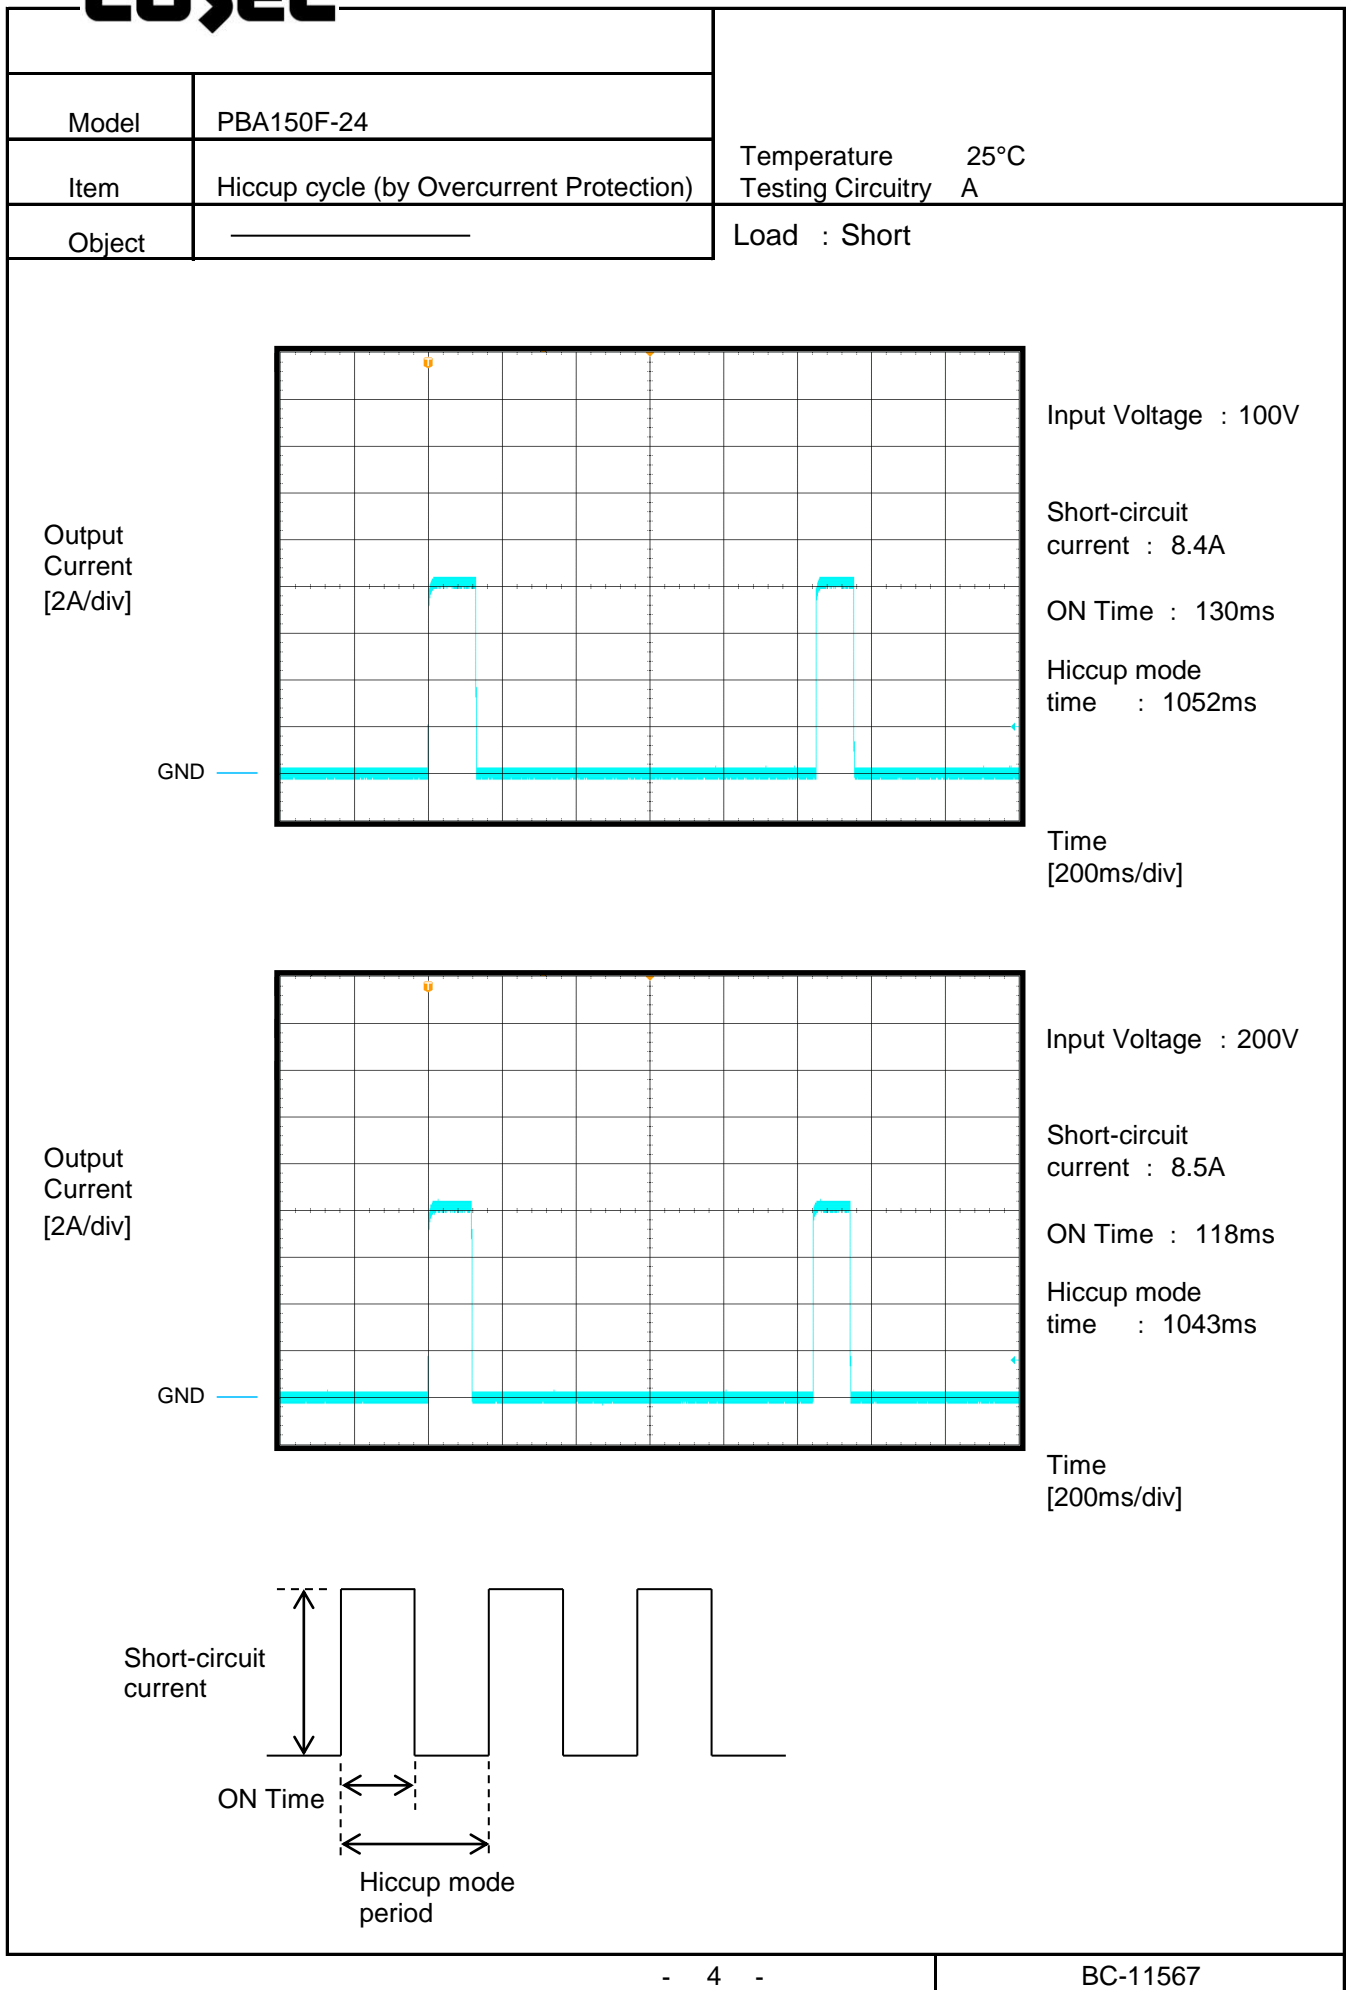

Model	PBA150F-24	Temperature25°C Testing Circuitry-															
Item	Input voltage - Power consumption																
Object	_____	Load:0%															
1.Graph																	
<div><table><thead><tr><th>Input Voltage [V]</th><th>Power consumption [W]</th></tr></thead><tbody><tr><td>85</td><td>0.22</td></tr><tr><td>100</td><td>0.27</td></tr><tr><td>115</td><td>0.82</td></tr><tr><td>200</td><td>1.32</td></tr><tr><td>230</td><td>1.72</td></tr><tr><td>264</td><td>2.42</td></tr></tbody></table></div>		Input Voltage [V]	Power consumption [W]	85	0.22	100	0.27	115	0.82	200	1.32	230	1.72	264	2.42	2.Values	
Input Voltage [V]	Power consumption [W]																
85	0.22																
100	0.27																
115	0.82																
200	1.32																
230	1.72																
264	2.42																
		<table><thead><tr><th>Input voltage [V]</th><th>Power consumption [W]</th></tr></thead><tbody><tr><td>85</td><td>0.22</td></tr><tr><td>100</td><td>0.27</td></tr><tr><td>115</td><td>0.82</td></tr><tr><td>200</td><td>1.32</td></tr><tr><td>230</td><td>1.72</td></tr><tr><td>264</td><td>2.42</td></tr></tbody></table>		Input voltage [V]	Power consumption [W]	85	0.22	100	0.27	115	0.82	200	1.32	230	1.72	264	2.42
Input voltage [V]	Power consumption [W]																
85	0.22																
100	0.27																
115	0.82																
200	1.32																
230	1.72																
264	2.42																
Reducing standby power is possible by OFF signal of the remote control.																	

-5-

BC-11567

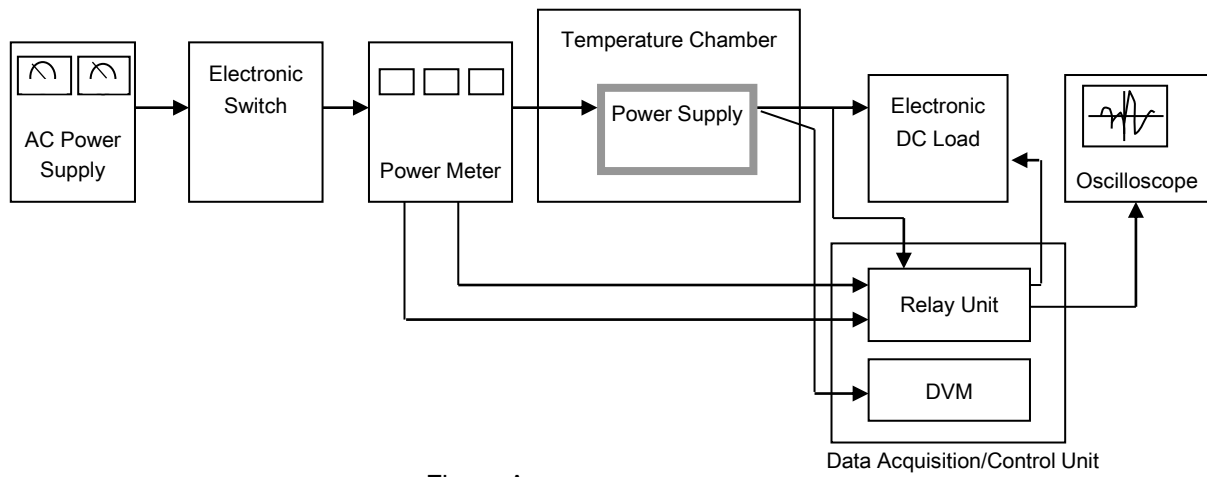


Figure A