



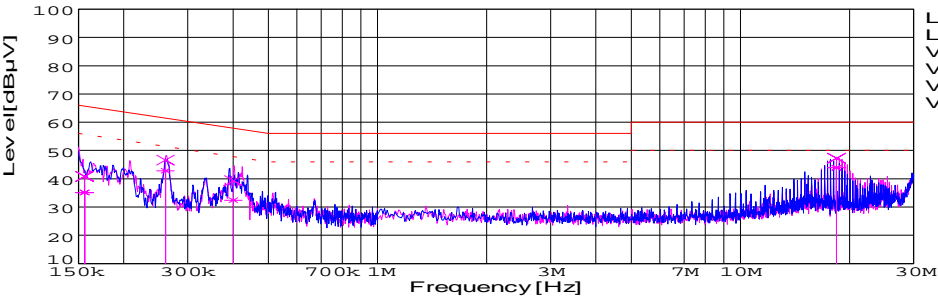
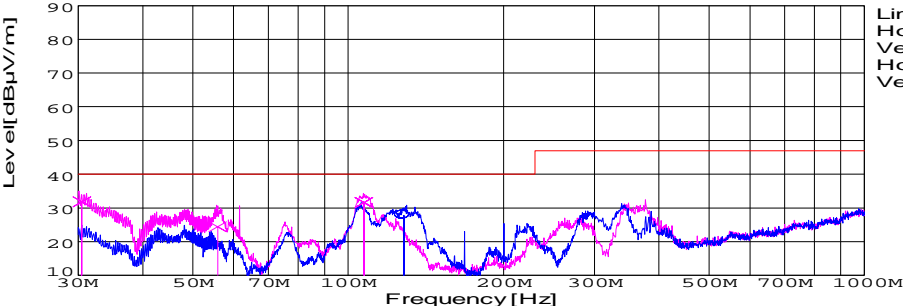
PBA600F EMI/EMS Test result

 September 16, 2004
 Design engineering dep.

 Approved : Takahiro Umeda

 Prepared : Haruki Morita

No.	Test item	Conditions	Conditions of Acceptability	Result
1	Line conduction	(1) Rated input(AC100V,120V,230V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$	(1)Meets the undermentioned standard. FCC Part15 classB , VCCI classB CISPR22 classB , EN55022-B	OK
2	Radiated emission	(1) Rated input(AC100V,120V,230V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$	(1)Meets the undermentioned standard. FCC Part15 classB , VCCI classB CISPR22 classB , EN55022-B	OK
3	Harmonic current (EN61000-3-2)	(1) Rated input (AC100V,230V) (2) Load 0 - Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$	(1)Meets the undermentioned standard. EN61000-3-2 classA	OK
4	Static electricity immunity test (EN61000-4-2)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4) Contact discharge voltage 8[kV] (Level 4)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
5	Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4)Testing field strength 10[V/m] (Level 3)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
6	Electrical fast transient/ burst immunity test (EN61000-4-4)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4) Test peak voltage 4[kV] (Level 4)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
7	Surge immunity test (EN61000-4-5)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4) Test voltage Line to line 2[kV] (Level 3) Line to earth 4[kV] (Level 4)	(1)The power supply is not stop (2)Circuit does not malfunction. (3)No abnormality of the insulation destruction etc. (4)Parts are no damaged.	OK
8	Immunity to conducted disturbances, induced by radio-frequency fields (EN61000-4-6)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4) Voltage level (e.m.f.) 10[V] (Level 3)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
9	Power frequency magnetic field immunity test (EN61000-4-8)	(1) Rated input (AC230V) (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$ (4) Magnetic field 30A/m (Level 4)	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK
10	Voltage dips, short interruptions and voltage variations immunity test (EN61000-4-11)	(1) Rated input (AC230V) •30% reduction at 10mS min. •60% reduction at 100mS min •95% reduction at 5S min. • $\pm 10\%$ variation at 15 minutes (2) Rated load (3) Ambient temp. $25 \pm 10^{\circ}\text{C}$	(1)No protection circuit failure. (2)No output voltage drop with control circuit failure. (3)No any other function failure	OK

DATA SHEET							Date	10-Oct-03																																														
Model	PBA600F-12						Temp.	25 degreeC																																														
Test	EMI Line conduction & Radiated emission						Humid.	45 %RH																																														
							Tested by	H.Morita																																														
LINE CONDUCTION																																																						
Model Name : PBA600F-12			Temp. : 25																																																			
Model No. :			Humi. : 45																																																			
Serial No. :			Date : 2003/10/10 17:44																																																			
Points : 4			Test Equip. : R3132,ESPC																																																			
Detector : PEAK/QP/Ave.			Comment : H.Morita																																																			
Line Mode : VB			+12V 53A																																																			
Power Supply : AC 230V 50Hz																																																						
Limit1: [EN 55022] Class B(QP)																																																						
Limit2: [EN 55022] Class B(Ave.)																																																						
							AC 230V 50Hz +12V 53A																																															
<table><tr><th>Frequency [MHz]</th><th>Meter Reading (Ave.) [dBuV]</th><th>Meter Reading (QP) [dBuV]</th><th>Factor [dB]</th><th>Level(Ave.) [dBuV]</th><th>Level(QP) [dBuV]</th><th>Line</th><th>Limit(Ave.) [dBuV]</th><th>Limit(QP) [dBuV]</th><th>Margin(Ave.) [dB]</th><th>Margin(QP) [dB]</th></tr><tr><td>0.2606</td><td>33.1</td><td>36.8</td><td>9.8</td><td>42.9</td><td>46.6</td><td>VB</td><td>51.4</td><td>61.4</td><td>8.5</td><td>14.8</td></tr><tr><td>0.4008</td><td>22.5</td><td>29.4</td><td>9.9</td><td>32.4</td><td>39.3</td><td>VB</td><td>47.8</td><td>57.8</td><td>15.4</td><td>18.5</td></tr><tr><td>18.4014</td><td>33.7</td><td>37.1</td><td>10.2</td><td>43.9</td><td>47.3</td><td>VB</td><td>50</td><td>60</td><td>6.1</td><td>12.7</td></tr></table>											Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]	0.2606	33.1	36.8	9.8	42.9	46.6	VB	51.4	61.4	8.5	14.8	0.4008	22.5	29.4	9.9	32.4	39.3	VB	47.8	57.8	15.4	18.5	18.4014	33.7	37.1	10.2	43.9	47.3	VB	50	60	6.1	12.7
Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]																																												
0.2606	33.1	36.8	9.8	42.9	46.6	VB	51.4	61.4	8.5	14.8																																												
0.4008	22.5	29.4	9.9	32.4	39.3	VB	47.8	57.8	15.4	18.5																																												
18.4014	33.7	37.1	10.2	43.9	47.3	VB	50	60	6.1	12.7																																												
RADIATED EMISSION																																																						
Model Name : PBA600F-12			Temp. : 25																																																			
Model No. :			Humi. : 45																																																			
Serial No. :			Date : 2003/10/10 17:28																																																			
Points : 4			Test Equip. : R3132,ESPC																																																			
Detector : PEAK/QP			Comment : H.Morita																																																			
Polarization : Hori. & Vert.			+12V 53A																																																			
Power Supply : AC 230V 50Hz																																																						
Limit: [EN 55022] Class B<3m>																																																						
							AC 230V 50Hz +12V 53A																																															
<table><tr><th>Frequency [MHz]</th><th>MeterReading (QP) [dBuV]</th><th>Ant. Type</th><th>Antenna Factor [dB/m]</th><th>Cable & Preamp [dB]</th><th>Level(QP) [dBuV/m]</th><th>Angle [°]</th><th>Height [cm]</th><th>Polar.</th><th>Limit [dBuV/m]</th><th>Margin [dB]</th></tr><tr><td>30.472</td><td>46.1</td><td>BL</td><td>18</td><td>-32.3</td><td>31.8</td><td>143</td><td>100</td><td>Vert.</td><td>40</td><td>8.2</td></tr><tr><td>107.256</td><td>52.9</td><td>BL</td><td>10.4</td><td>-31.7</td><td>31.6</td><td>49</td><td>144</td><td>Vert.</td><td>40</td><td>8.4</td></tr></table>											Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	30.472	46.1	BL	18	-32.3	31.8	143	100	Vert.	40	8.2	107.256	52.9	BL	10.4	-31.7	31.6	49	144	Vert.	40	8.4											
Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]																																												
30.472	46.1	BL	18	-32.3	31.8	143	100	Vert.	40	8.2																																												
107.256	52.9	BL	10.4	-31.7	31.6	49	144	Vert.	40	8.4																																												