



EXTRA TEST DATA OF PBA75F-48

*Regulated DC Power Supply
Jun, 08, 2020*

COSEL CO.,LTD.




CONTENTS

1.Inrush Current (enlargement)	1
2.Dynamic Line Regulation	2
3.Overtoltage Protection (waveform)	3
4.Hiccup cycle (by Overcurrent Protection)	4
5.Power Consumption (by Input Voltage)	5
6.Figure of Testing Circuitry	6

(Final Page 6)






Model	PBA75F-48		
Item	Inrush Current (enlargement)	Temperature	25°C
Object		Testing Circuitry	A

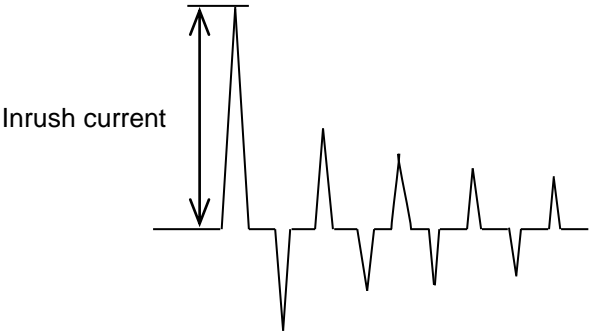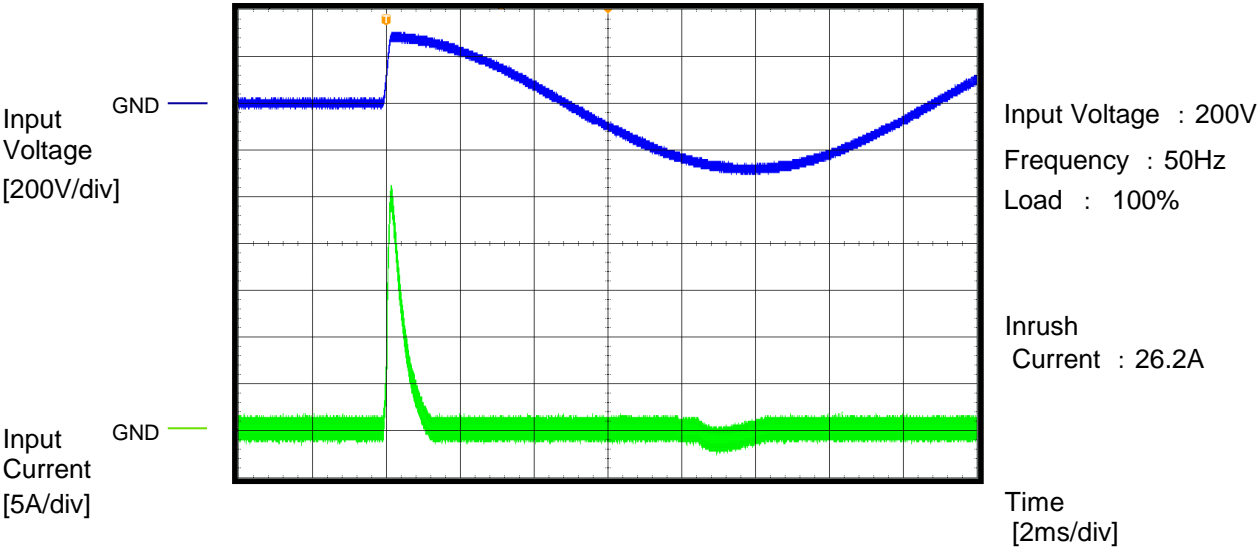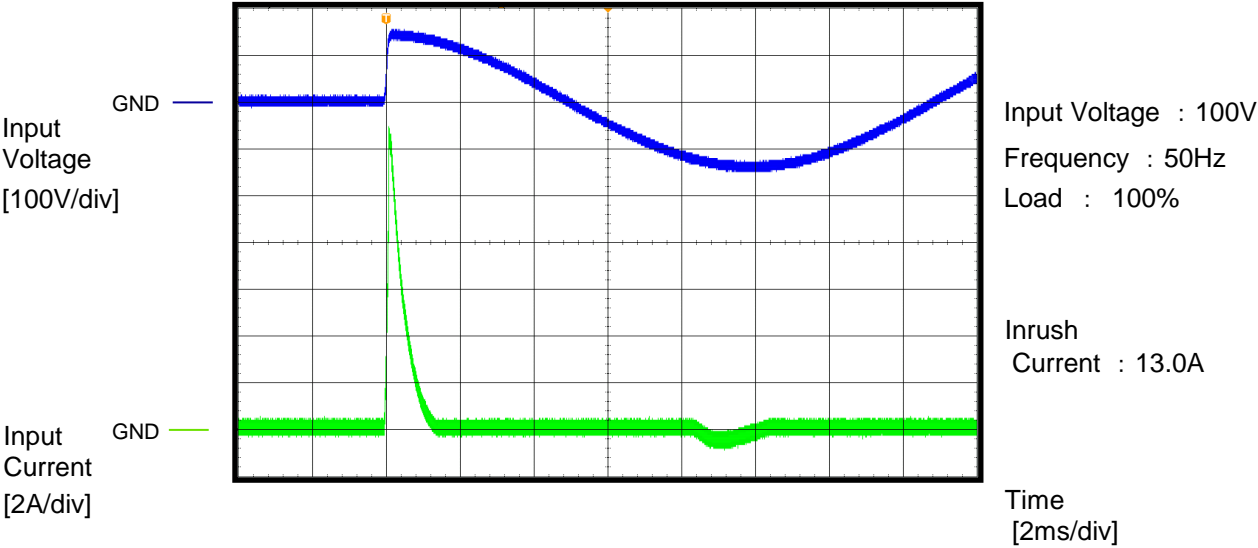



Model	PBA75F-48		
Item	Dynamic Line Regulation	Temperature	25°C
		Testing Circuitry	A
Object			

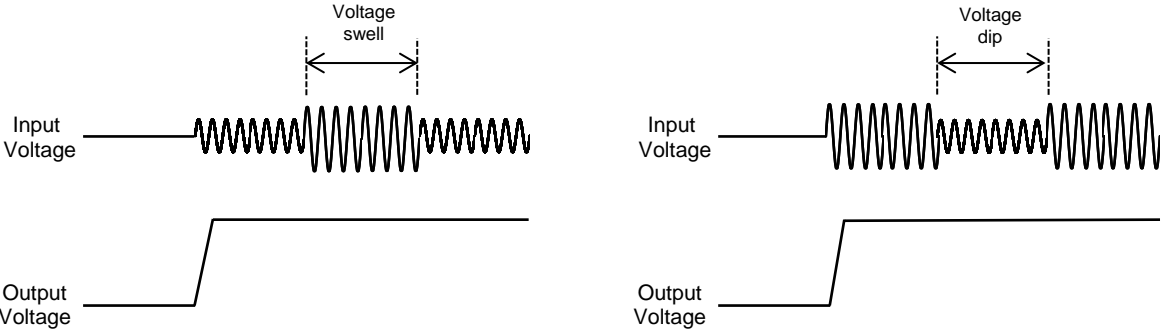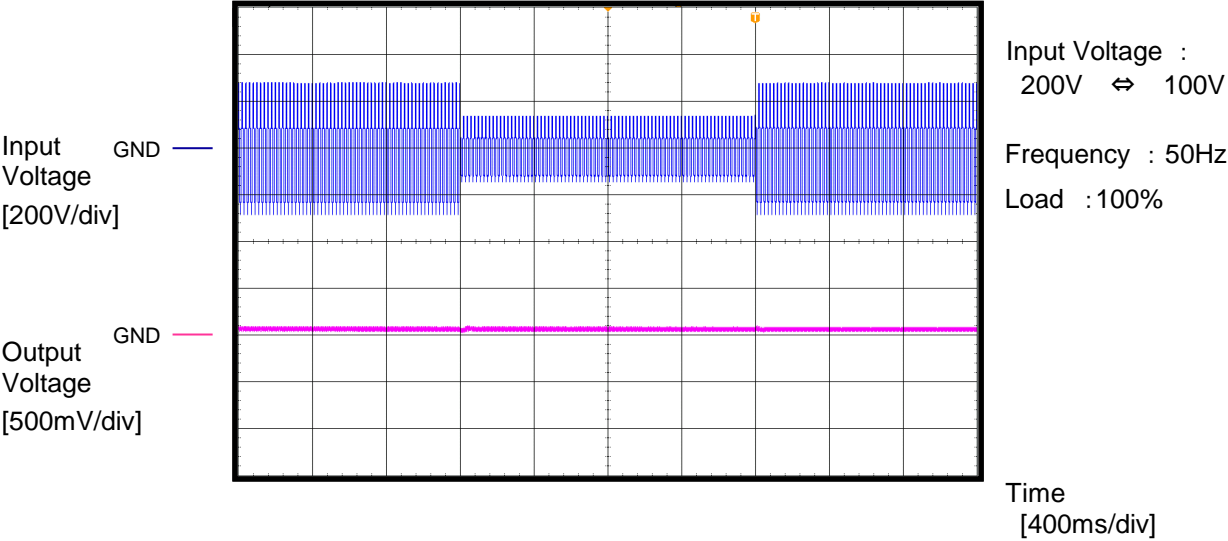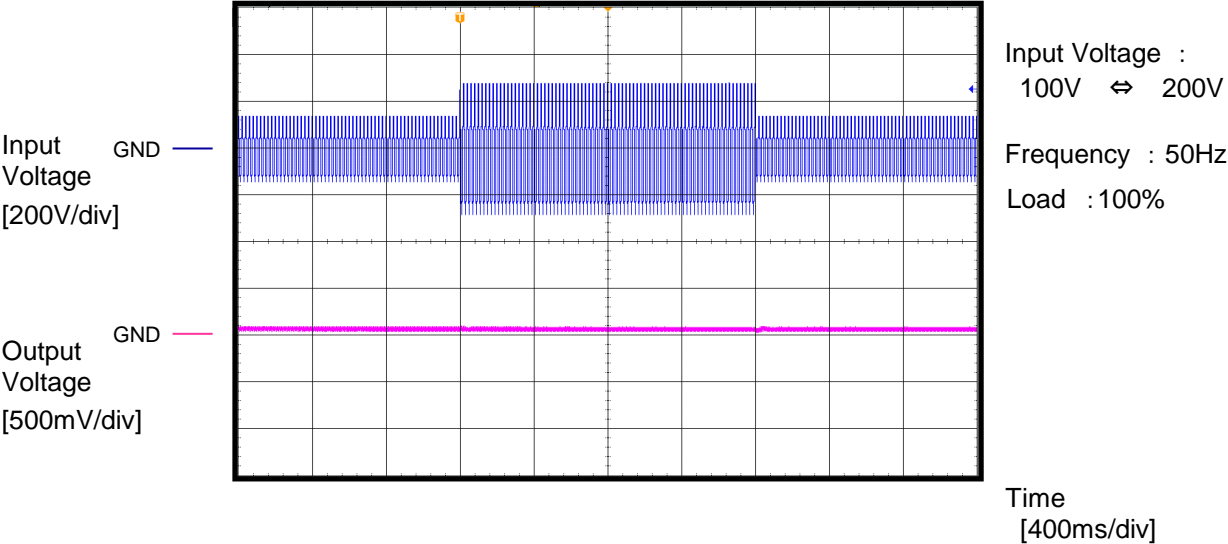




		Temperature 25°C Testing Circuitry A Input Voltage : 100V
Model	PBA75F-48	
Item	Over Voltage Protection	
Object	_____	

Output Voltage
[10V/div]

GND

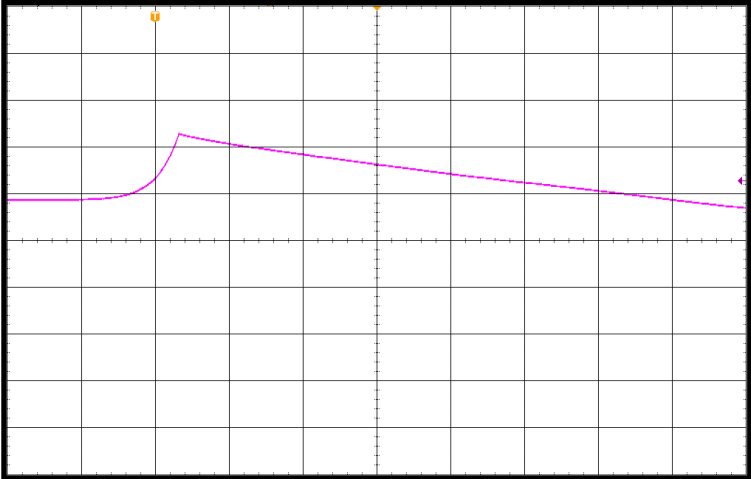


Load : 0%
Overvoltage protection
value : 62.9V

Time
[40ms/div]


Output Voltage
[10V/div]

GND

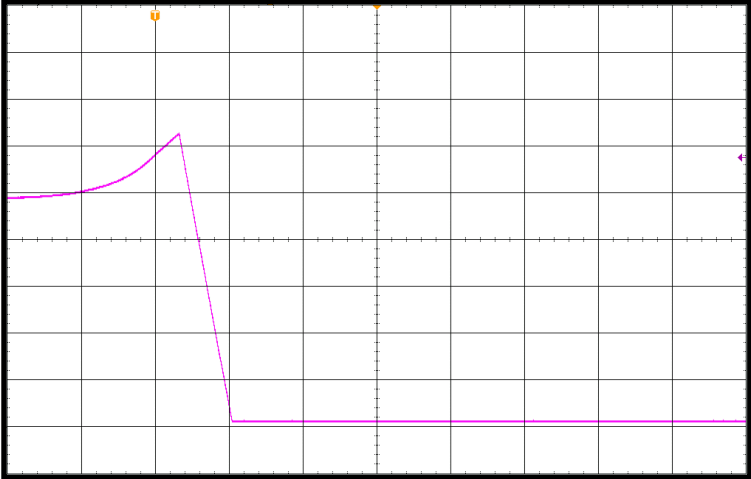

Load : 100%
Overvoltage protection
value : 62.8V

Time
[20ms/div]

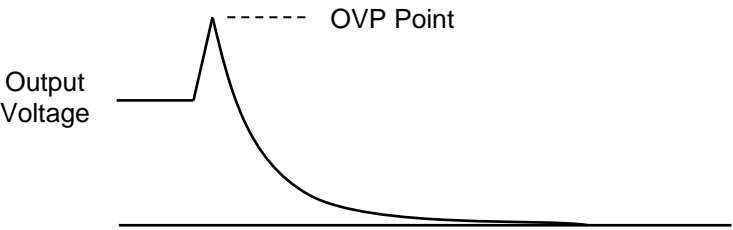




Model	PBA75F-48		
Item	Hiccup cycle (by Overcurrent Protection)	Temperature	25°C
		Testing Circuitry	A
Object		Load : Short	

Output Current
[1A/div]

GND

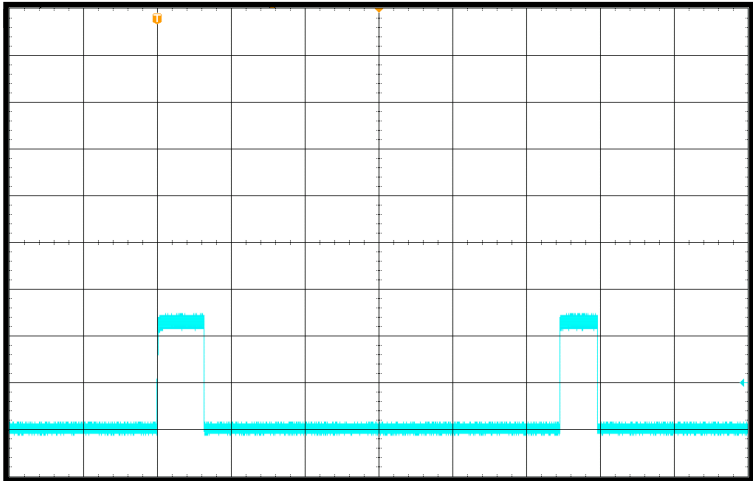

Input Voltage : 100V

Short-circuit current : 2.5A


ON Time : 127ms

Hiccup mode time : 1092ms

Time
[200ms/div]

Output Current
[1A/div]

GND

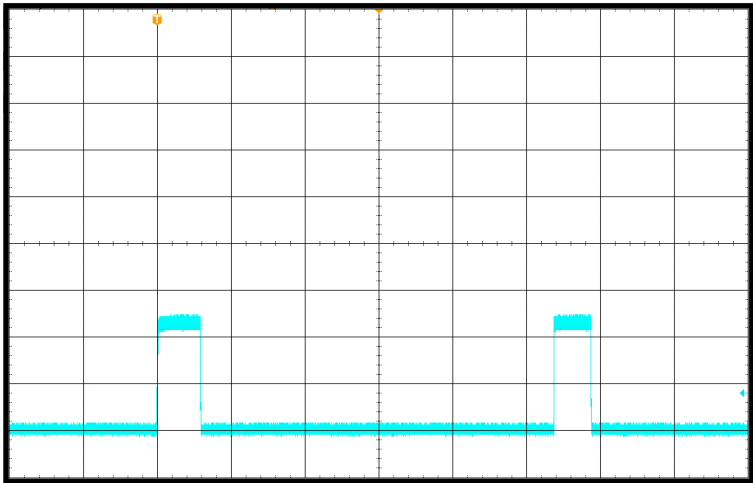


Input Voltage : 200V

Short-circuit current : 2.5A

ON Time : 118ms

Hiccup mode time : 1076ms

Time
[200ms/div]

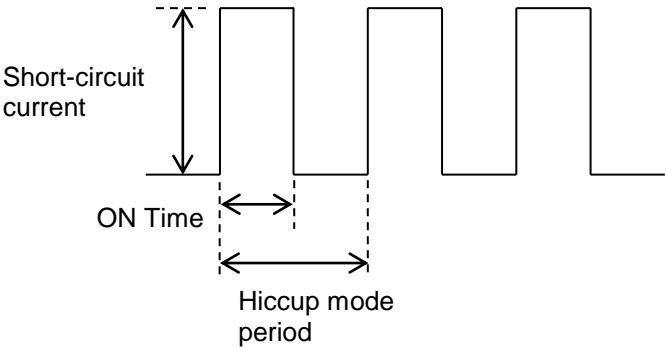



Model	PBA75F-48																														
Item	Input voltage - Power consumption	Temperature	25°C																												
		Testing Circuitry	-																												
Object	_____	Load :0%																													
1.Graph		2.Values																													
<div><div>Power consumption[W]</div><table><tr><th>Input voltage [V]</th><th>Power consumption [W]</th></tr><tr><td>85</td><td>1.00</td></tr><tr><td>100</td><td>0.97</td></tr><tr><td>115</td><td>0.96</td></tr><tr><td>200</td><td>1.23</td></tr><tr><td>230</td><td>1.37</td></tr><tr><td>264</td><td>2.39</td></tr></table><div>Input Voltage [V]</div></div> <div>Reducing standby power is possible by OFF signal of the remote control.</div>		Input voltage [V]	Power consumption [W]	85	1.00	100	0.97	115	0.96	200	1.23	230	1.37	264	2.39	<table><tr><th>Input voltage [V]</th><th>Power consumption [W]</th></tr><tr><td>85</td><td>1.00</td></tr><tr><td>100</td><td>0.97</td></tr><tr><td>115</td><td>0.96</td></tr><tr><td>200</td><td>1.23</td></tr><tr><td>230</td><td>1.37</td></tr><tr><td>264</td><td>2.39</td></tr></table>		Input voltage [V]	Power consumption [W]	85	1.00	100	0.97	115	0.96	200	1.23	230	1.37	264	2.39
Input voltage [V]	Power consumption [W]																														
85	1.00																														
100	0.97																														
115	0.96																														
200	1.23																														
230	1.37																														
264	2.39																														
Input voltage [V]	Power consumption [W]																														
85	1.00																														
100	0.97																														
115	0.96																														
200	1.23																														
230	1.37																														
264	2.39																														

- 5 -

BC-11553

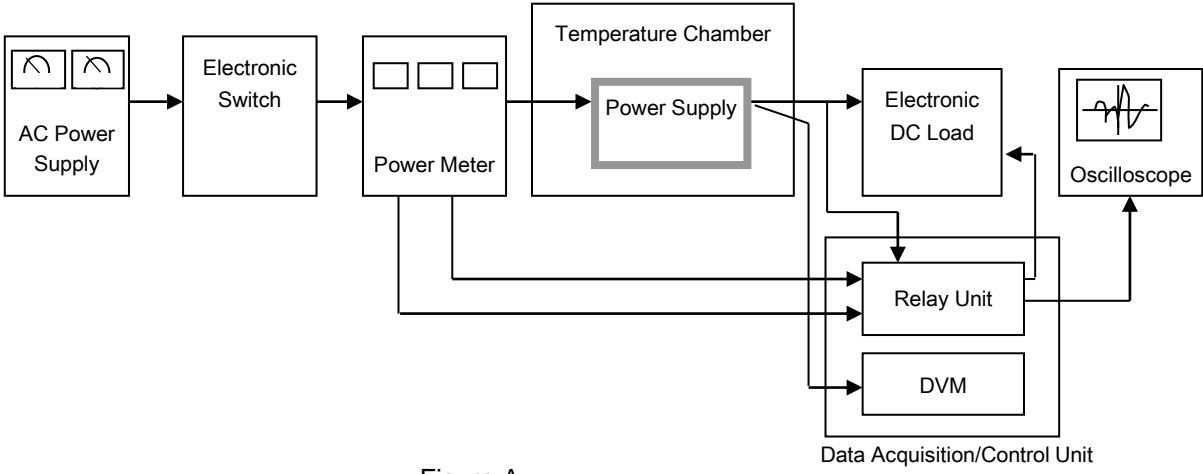


Figure A