



DATA SHEET		Date	07-Mar-19
Model	PCA1000F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Araki

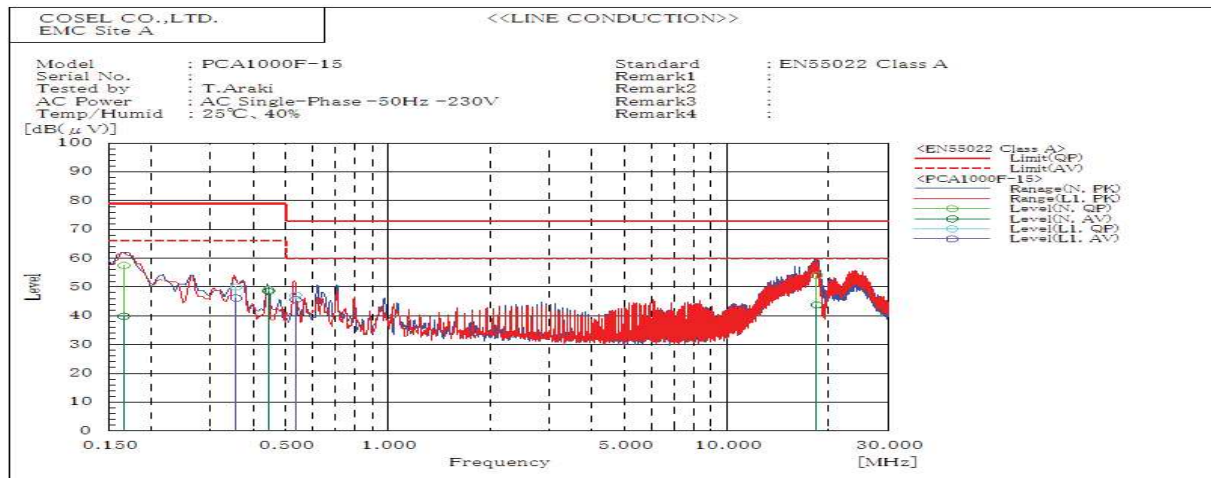


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.356	L1	50.1	46.2	79	66	28.9	19.8	Pass	
0.534	L1	47.2	45.6	73	60	25.8	14.4	Pass	
0.166	N	57.5	39.9	79	66	21.5	26.1	Pass	
0.445	N	49.1	48.5	79	66	29.9	17.5	Pass	
18.396	N	54.1	43.8	73	60	18.9	16.2	Pass	

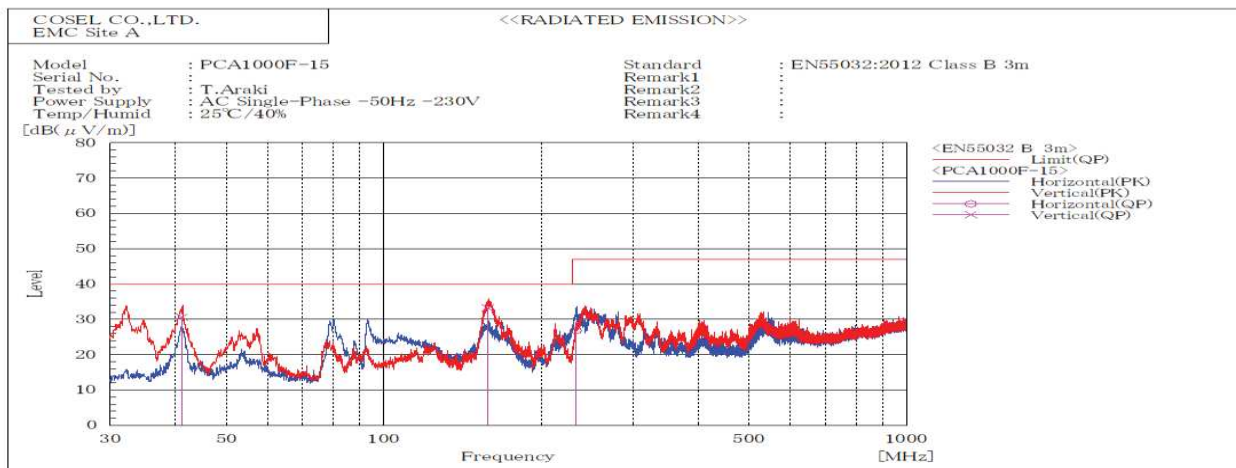


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
158.08	V	Stable	33.2	40	6.8	Pass	100	217.5	
41.118	V	Stable	30.6	40	9.4	Pass	100.2	308.7	
233.029	H	Stable	26.8	47	20.2	Pass	140.9	216	

DATA SHEET		Date	07-Mar-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Araki

1. Line conduction

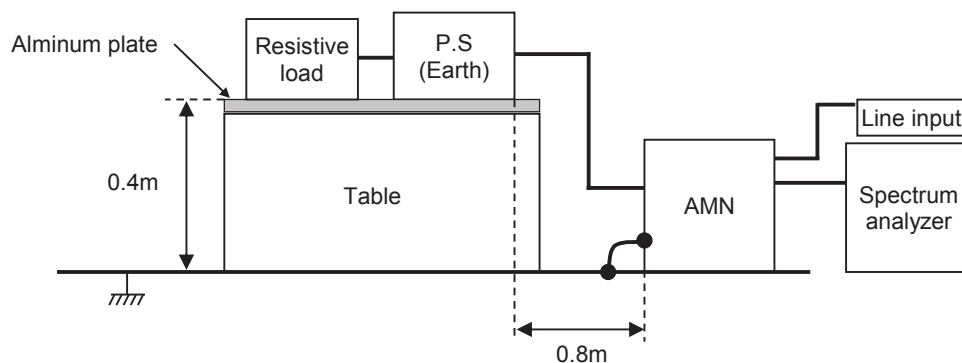

2. Radiated emission

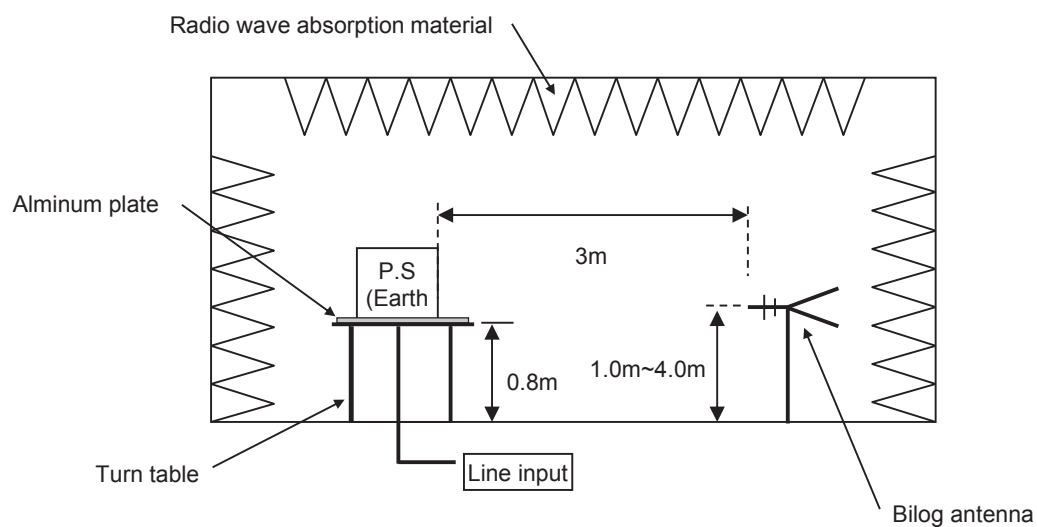

Conditions

Test : EMI

Model Name : PCA1000F

O Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

