



DATA SHEET		Date	07-Mar-19
Model	PCA1000F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Araki

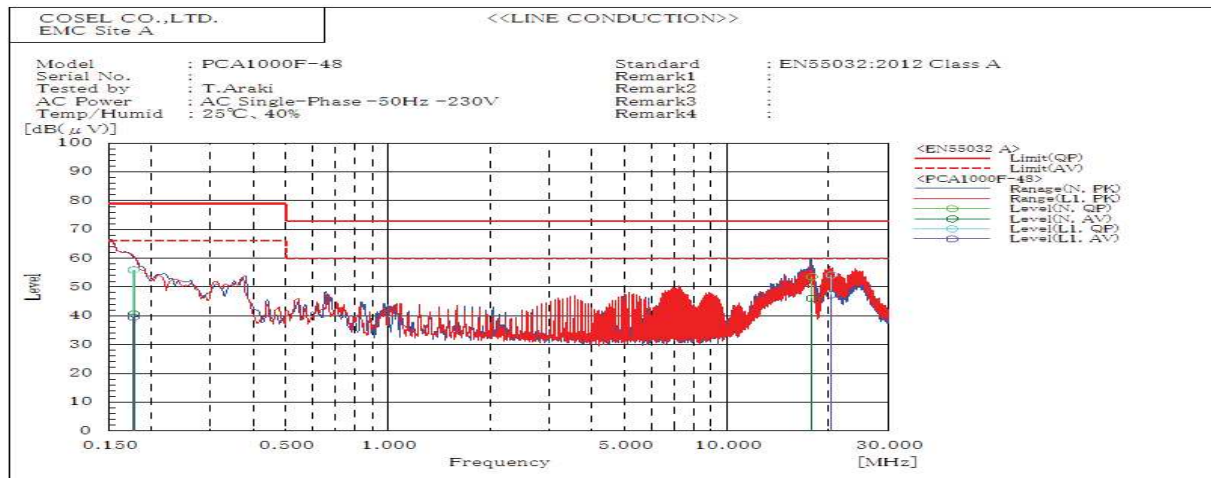


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz	Phase	dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.178	L1	55.9	39.6	79	66	23.1	26.4	Pass	
20.334	L1	54.2	47.4	73	60	18.8	12.6	Pass	
0.178	N	56	40.7	79	66	23	25.3	Pass	
17.759	N	53.7	46.1	73	60	19.3	13.9	Pass	

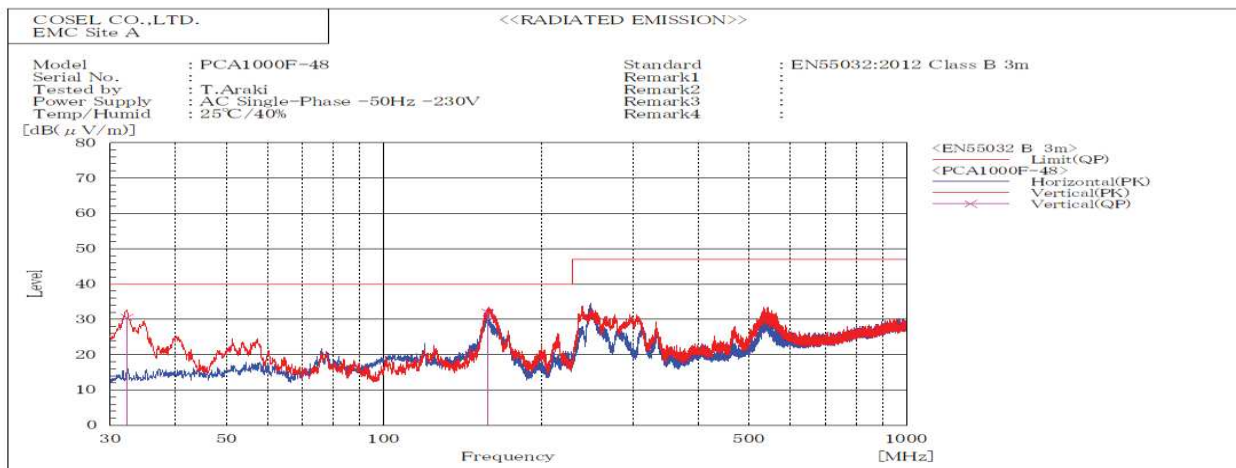


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB(μV/m)				
32.278	V	Stable	30.5	40	9.5	Pass	100	2.2	
158.367	V	Stable	31.9	40	8.1	Pass	100	57.7	

DATA SHEET		Date	07-Mar-19
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Araki

## 1. Line conduction

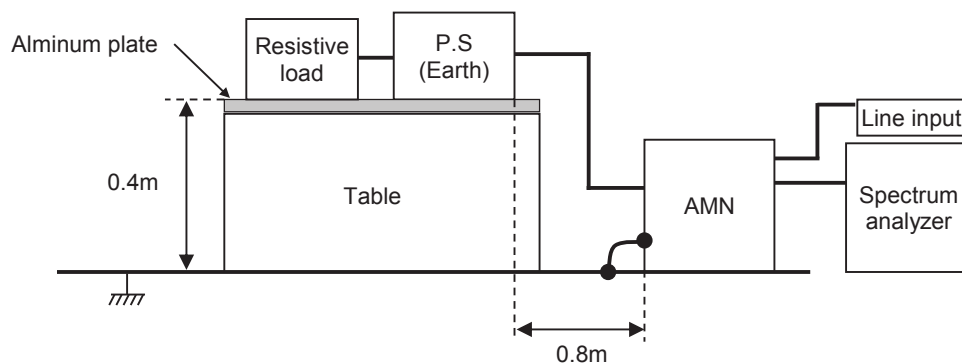

## 2. Radiated emission

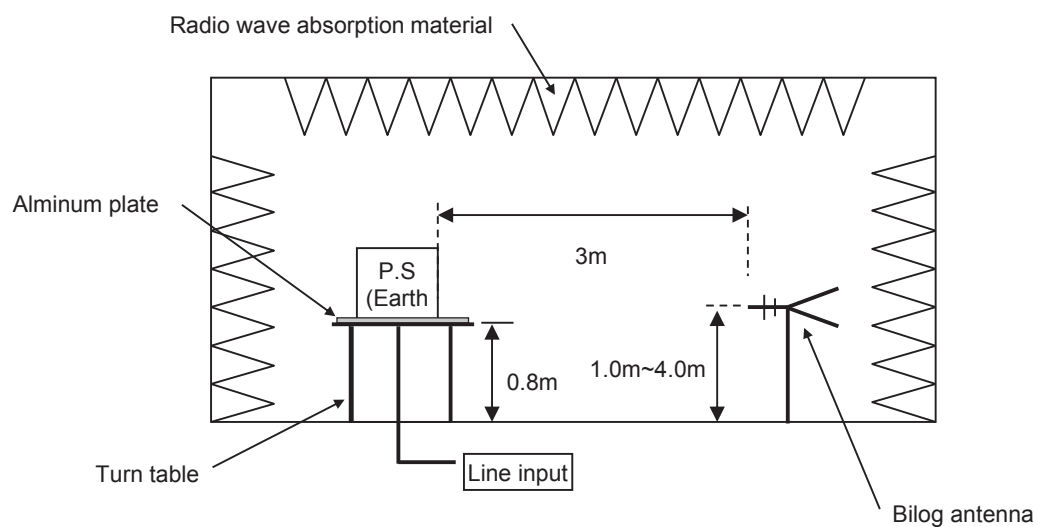


## Conditions

Test : EMI

Model Name : PCA1000F

O Photographs of test set-up

### 1.LINE CONDUCTION

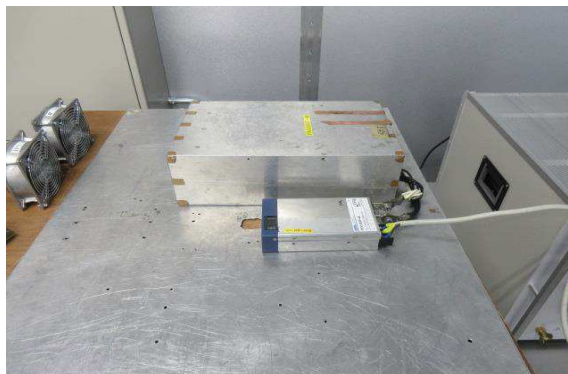

### 2.RADIATED EMISSION

