



DATA SHEET			Date	09-Feb-21
Model	PCA1500F-48		Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission		Humid.	40 %RH
			Tested by	K.Miyazaki

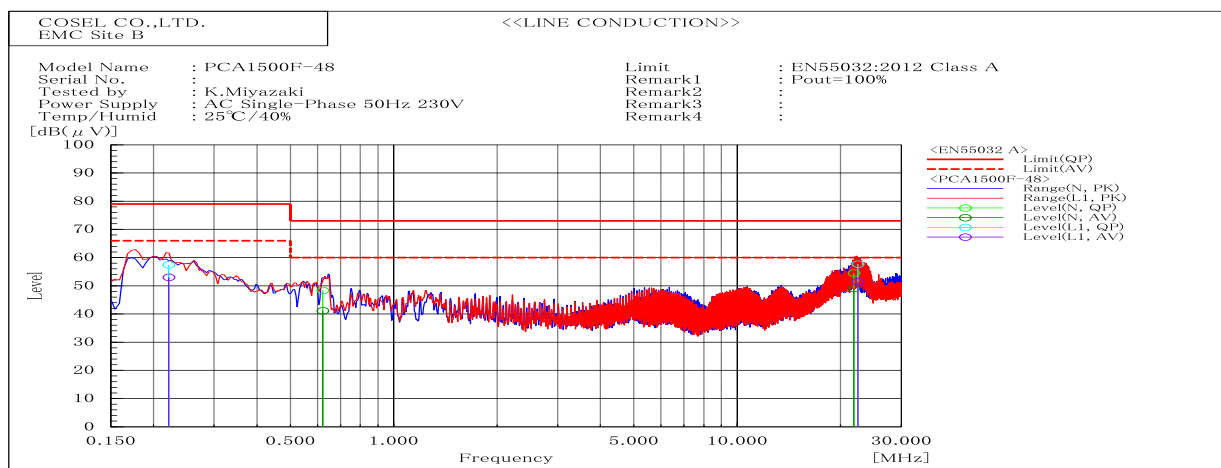


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.221	L1	57.5	53	79	66	21.5	13	Pass	
22.457	L1	57.7	51.5	73	60	15.3	8.5	Pass	
0.621	N	48.4	41.2	73	60	24.6	18.8	Pass	
21.834	N	54.6	49.1	73	60	18.4	10.9	Pass	

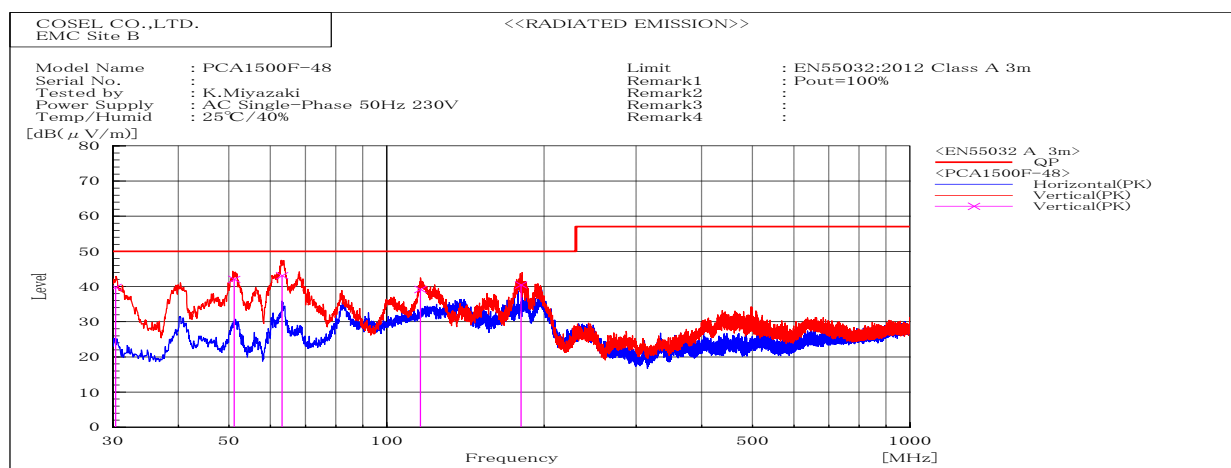


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB		cm	deg	
			QP	QP	QP				
30.331	V	Stable	39.8	50	10.2	Pass	100.2	0	
51.153	V	Stable	42.1	50	7.9	Pass	101.6	112.2	
63.077	V	Stable	43.1	50	6.9	Pass	100	0	
180.57	V	Stable	40.5	50	9.5	Pass	100	169	
115.988	V	Stable	39.2	50	10.8	Pass	115.3	296	

DATA SHEET		Date	09-Feb-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Miyazaki

## 1. Line conduction

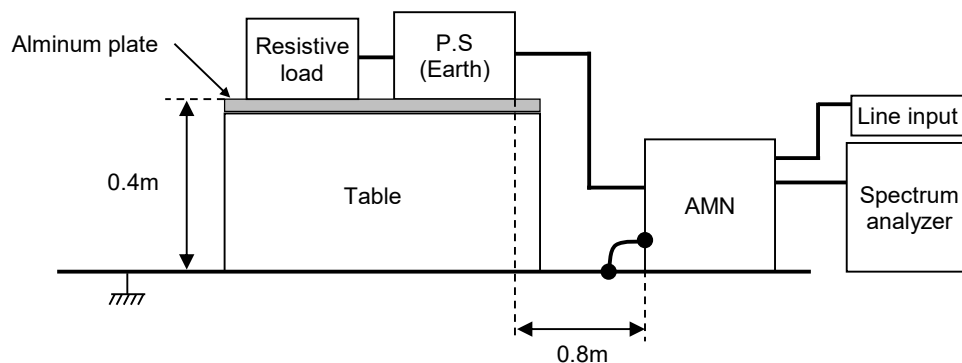

## 2. Radiated emission

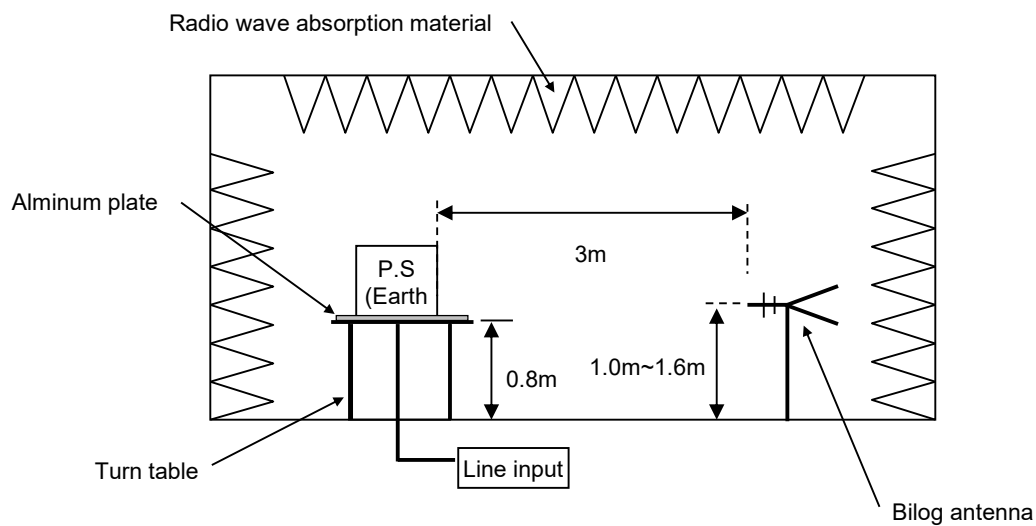


## Conditions

Test : EMI  
Model Name : PCA1500F-48

## Photographs of test set-up

### 1.LINE CONDUCTION

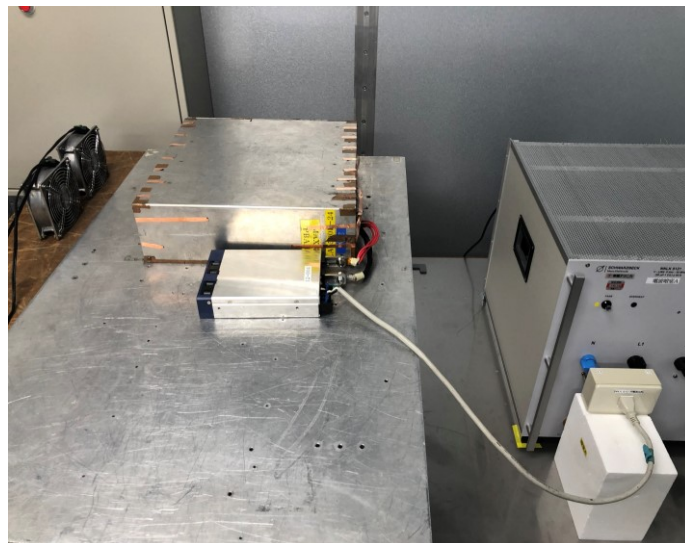

### 2.RADIATED EMISSION

