



DATA SHEET			Date	09-Feb-21
Model	PCA1500F-5		Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission		Humid.	40 %RH
			Tested by	M.Yamamoto

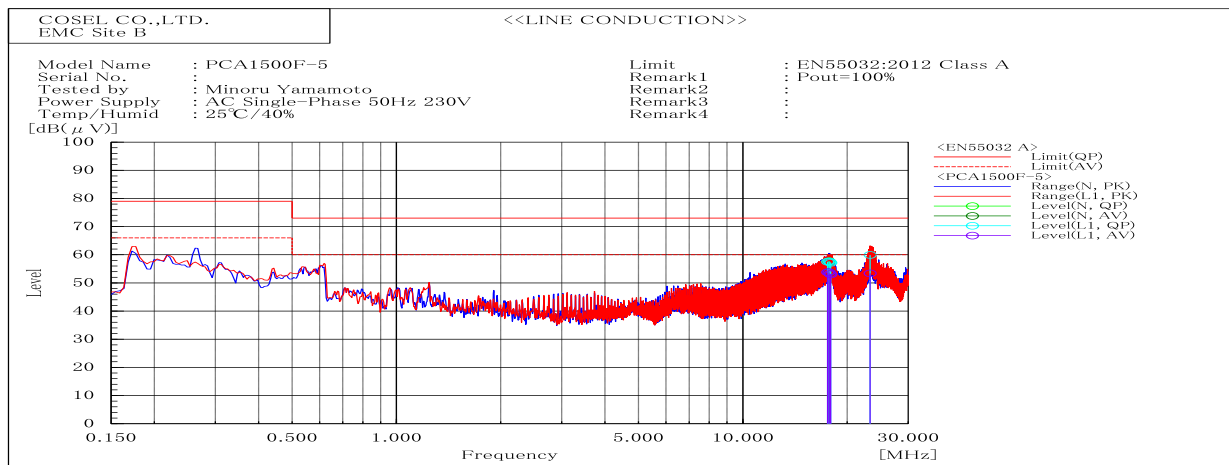


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
17.742	N	57.7	53.9	73	60	15.3	6.1	Pass	
17.566	L1	57.5	53.8	73	60	15.5	6.2	Pass	
17.746	L1	57.7	53.8	73	60	15.3	6.2	Pass	
17.835	L1	57.4	53.3	73	60	15.6	6.7	Pass	
17.922	L1	57.1	53	73	60	15.9	7	Pass	
23.304	L1	60	53.4	73	60	13	6.6	Pass	

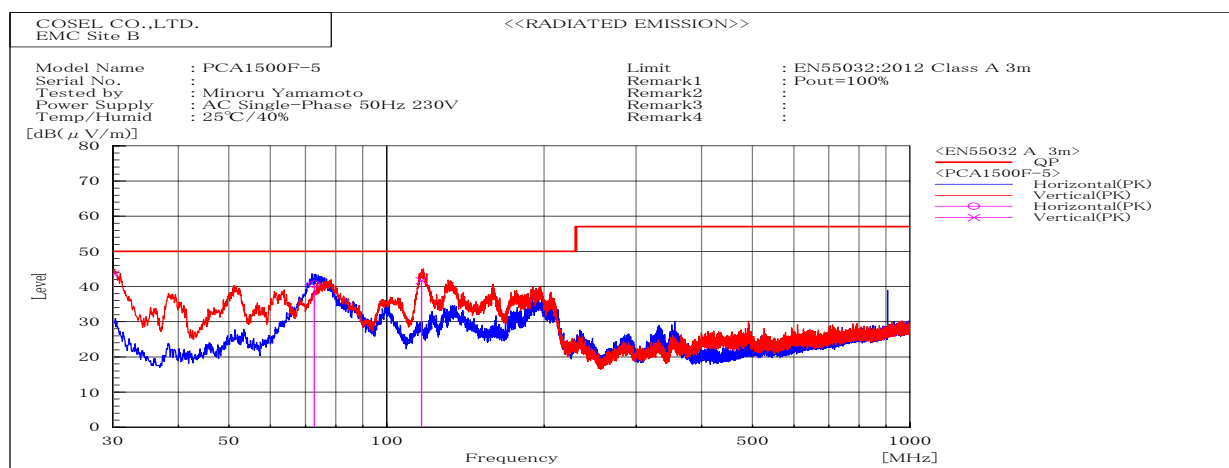


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
30.041	V	Stable	43.6	50	6.4	Pass	100.2	137.8	
72.673	H	Stable	40.7	50	9.3	Pass	188.9	21.2	
116.613	V	Stable	41.7	50	8.3	Pass	117.3	0	

DATA SHEET		Date	09-Feb-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	M.Yamamoto

1. Line conduction

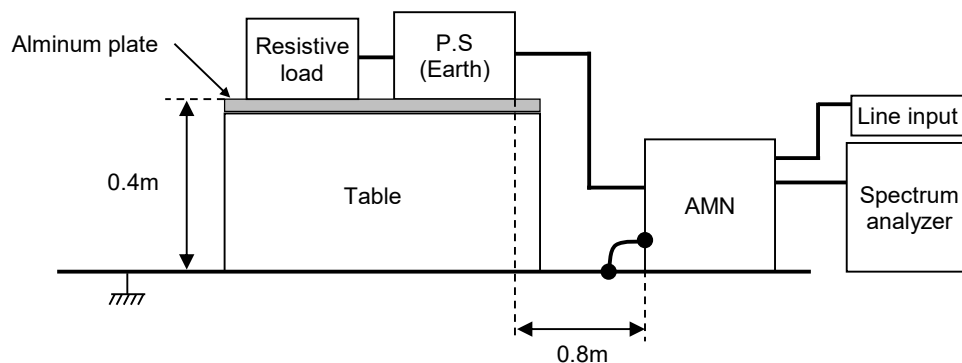

2. Radiated emission

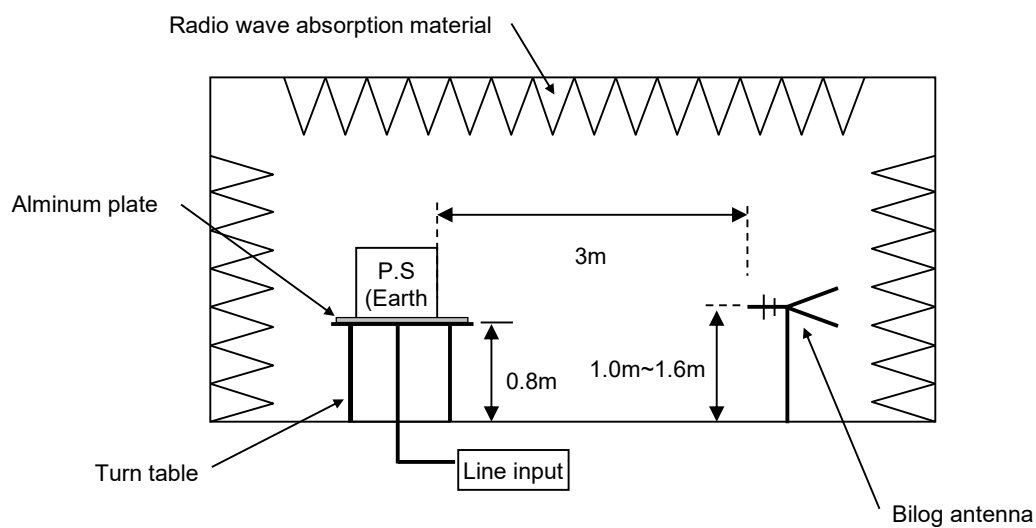


Conditions

Test : EMI
Model Name : PCA1500F-5

Photographs of test set-up

1.LINE CONDUCTION

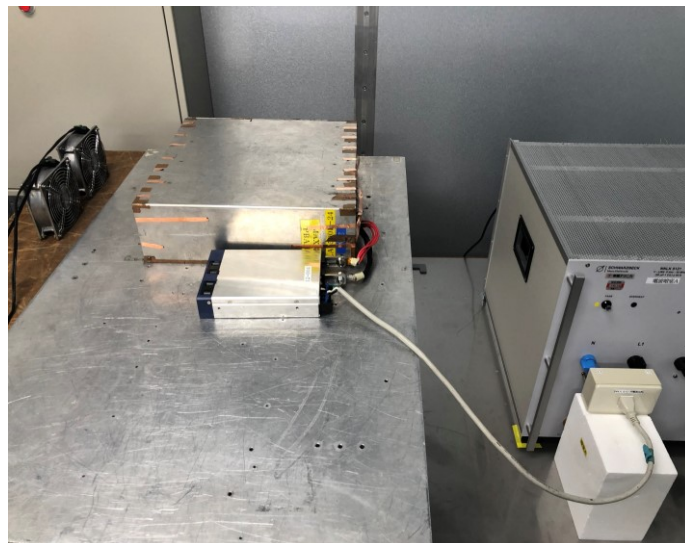

2.RADIATED EMISSION

