



DATA SHEET			Date	06-Apr-18
Model	PCA600F-15		Temp.	25 degreeC
Test	EMI		Humid.	40 %RH
	Line conduction & Radiated emission		Tested by	D.Hayashi

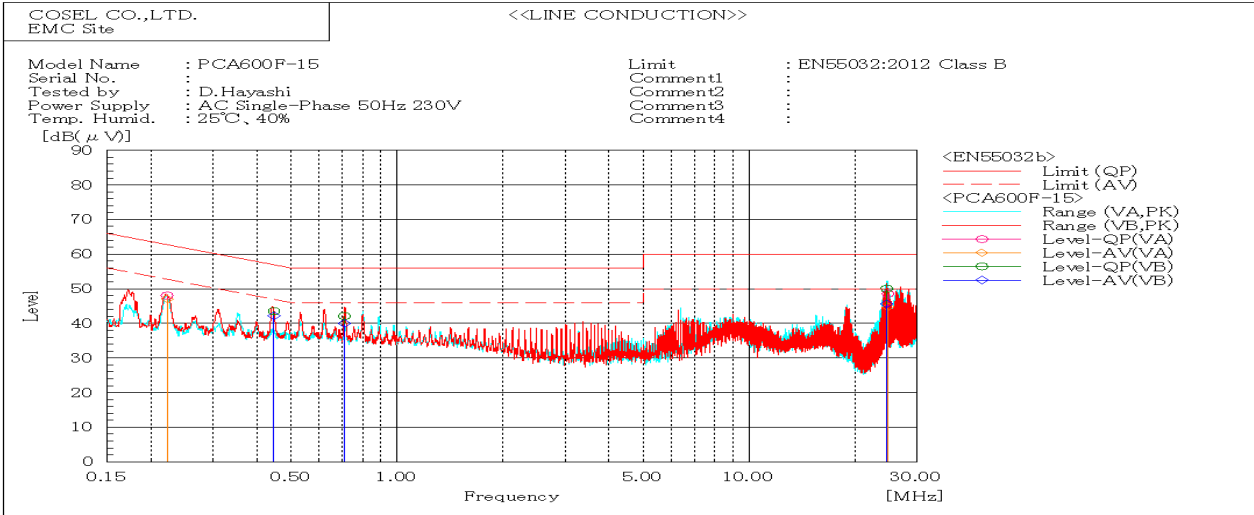


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.22191	VA	48.0	47.0	62.7	52.7	14.7	5.7	Pass	
0.44683	VB	43.5	42.2	56.9	46.9	13.4	4.7	Pass	
0.70838	VB	42.1	39.9	56.0	46.0	13.9	6.1	Pass	
24.65275	VB	50.0	45.6	60.0	50.0	10.0	4.4	Pass	
24.86280	VA	48.6	44.7	60.0	50.0	11.4	5.3	Pass	

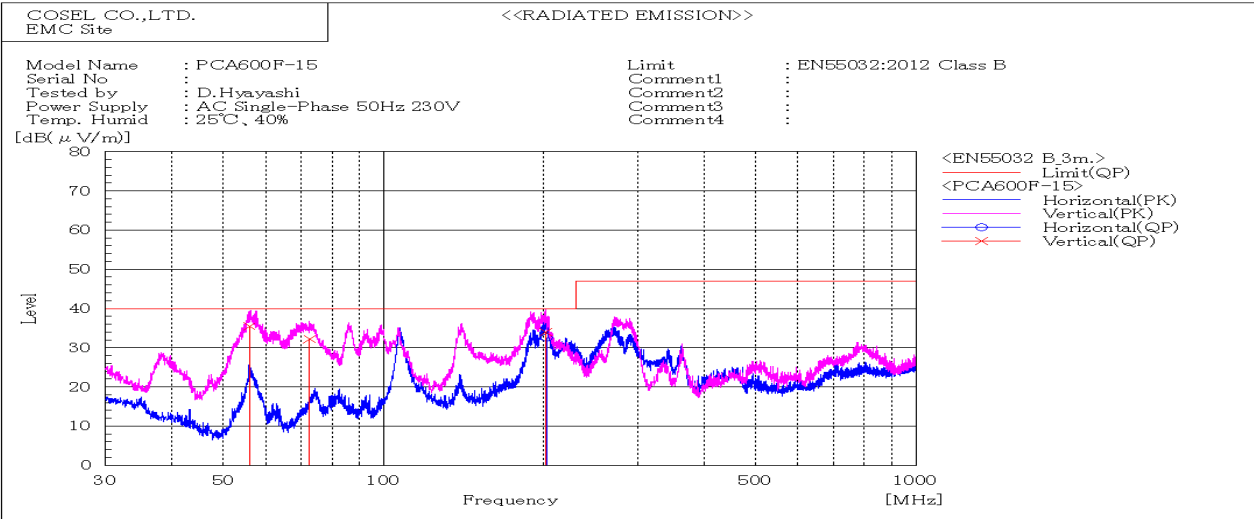


Frequency MHz	Polarization	Stability	Reading dB(μV)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
55.925	V	Stable	35.4	40.0	4.6	Pass	108	215	
72.575	V	Stable	32.1	40.0	7.9	Pass	105	44	
201.567	V	Stable	34.0	40.0	6.0	Pass	156	115	
202.186	H	Stable	32.6	40.0	7.4	Pass	137	66	

DATA SHEET		Date	06-Apr-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Hayashi

1. Line conduction

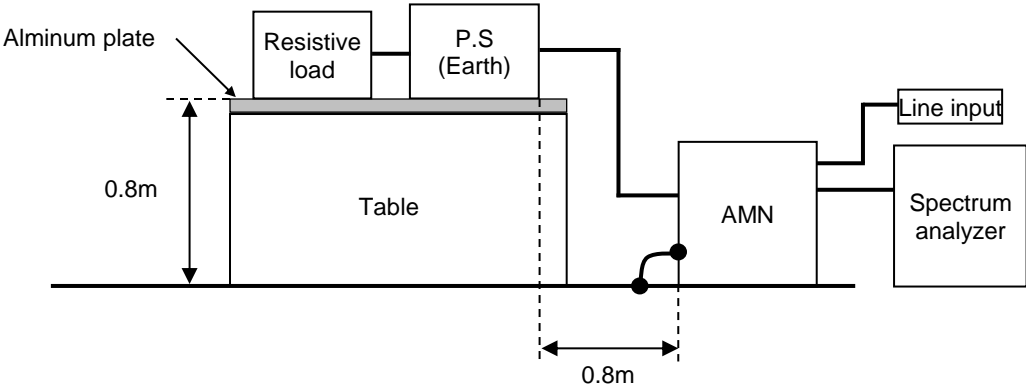

2. Radiated emission

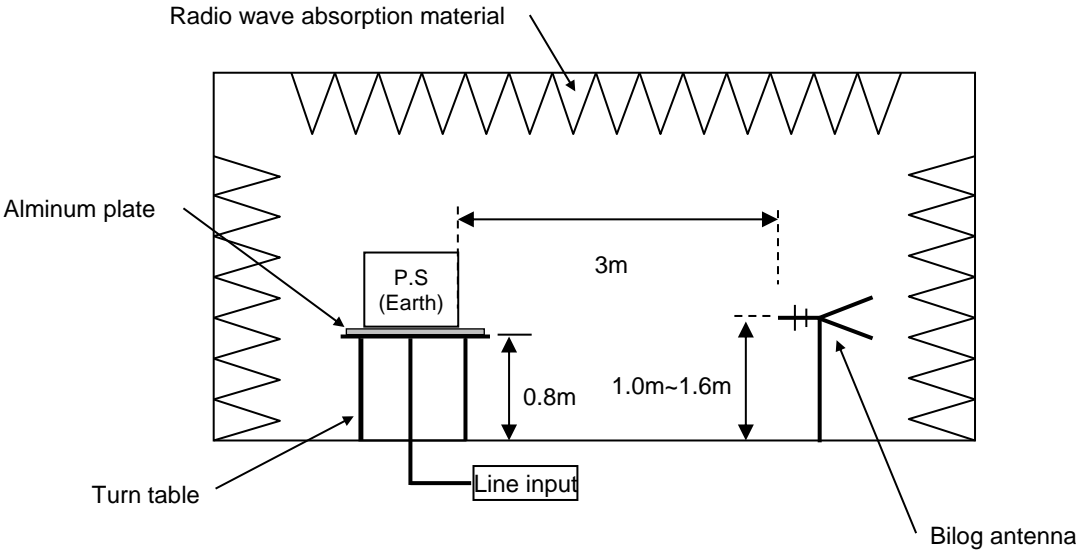

## Conditions

Test : EMI  
Model Name : PCA600F

## O Photographs of test set-up

### 1.LINE CONDUCTION



### 2.RADIATED EMISSION

