



DATA SHEET		Date	06-Apr-18
Model	PCA600F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Hayashi

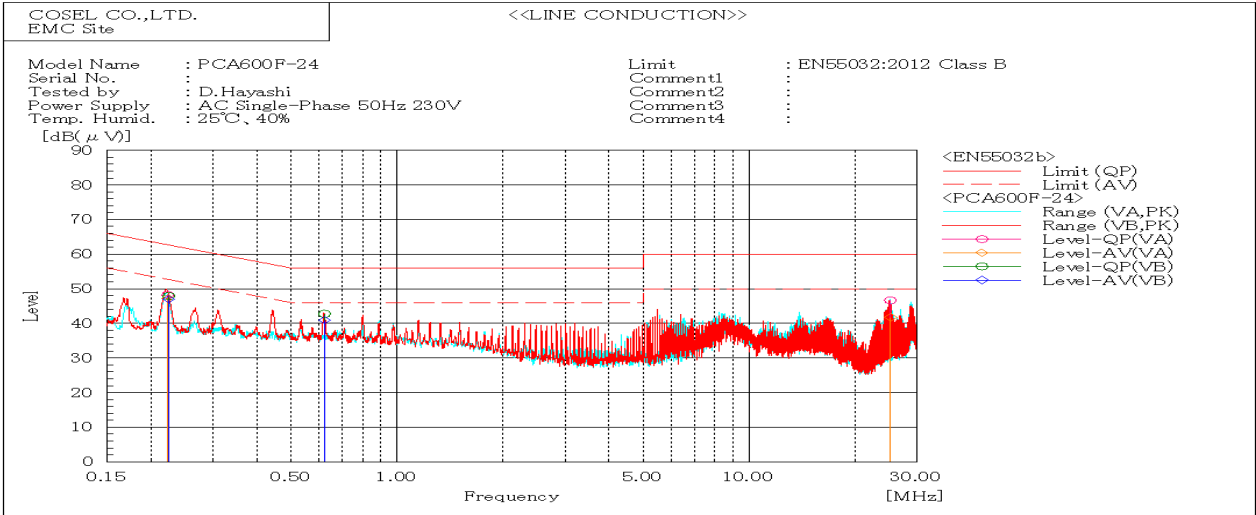


Frequency MHz	Line Phase	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.22439	VB	47.9	46.9	62.7	52.7	14.8	5.8	Pass	
0.22314	VA	48.2	47.3	62.7	52.7	14.5	5.4	Pass	
0.62175	VB	42.7	40.9	56.0	46.0	13.3	5.1	Pass	
25.25935	VA	46.6	41.8	60.0	50.0	13.4	8.2	Pass	

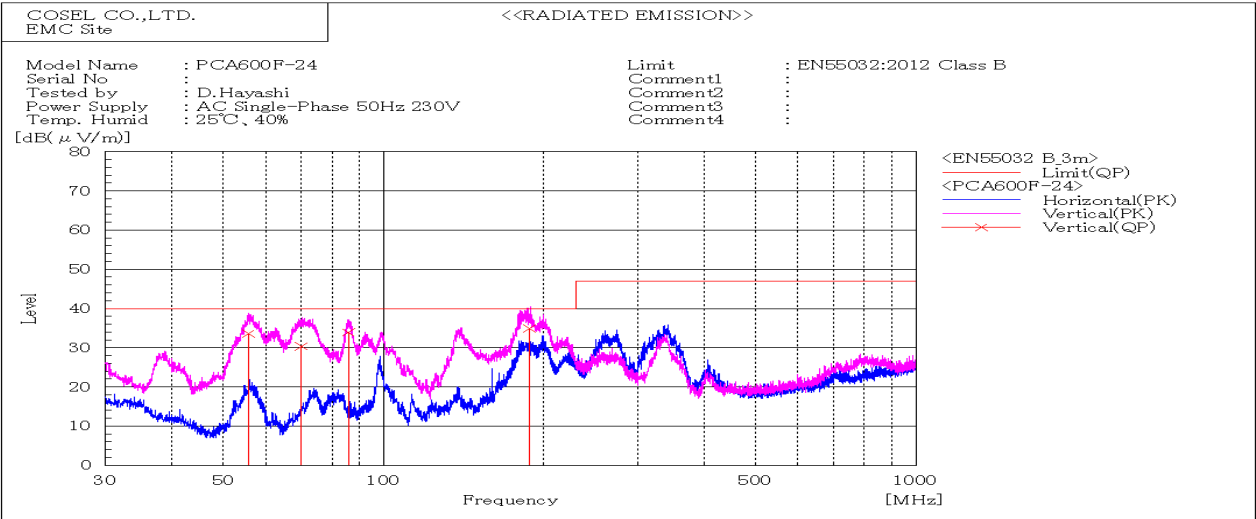


Frequency MHz	Polarization	Stability	Reading dB(μV)	Limit dB(μV/m)	Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
55.718	V	Stable	33.5	40.0	6.5	Pass	108	350	
69.951	V	Stable	30.3	40.0	9.7	Pass	103	1	
85.910	V	Stable	33.9	40.0	6.1	Pass	105	31	
187.778	V	Stable	34.8	40.0	5.2	Pass	106	41	

DATA SHEET		Date	06-Apr-18
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	D.Hayashi

1. Line conduction

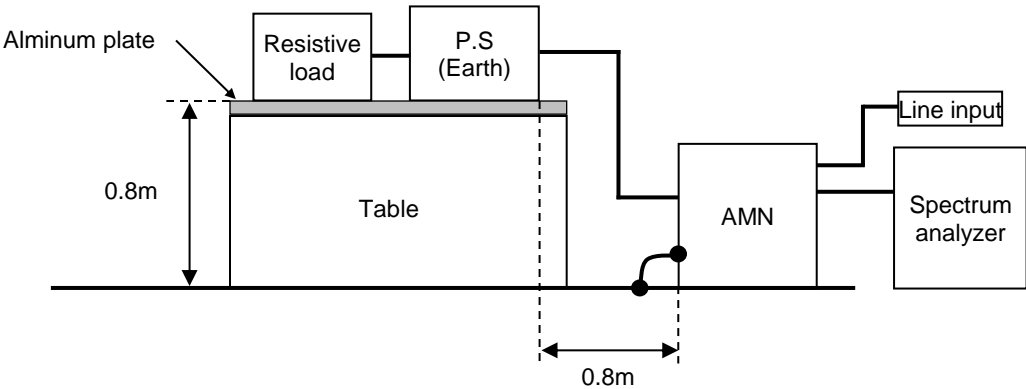

2. Radiated emission

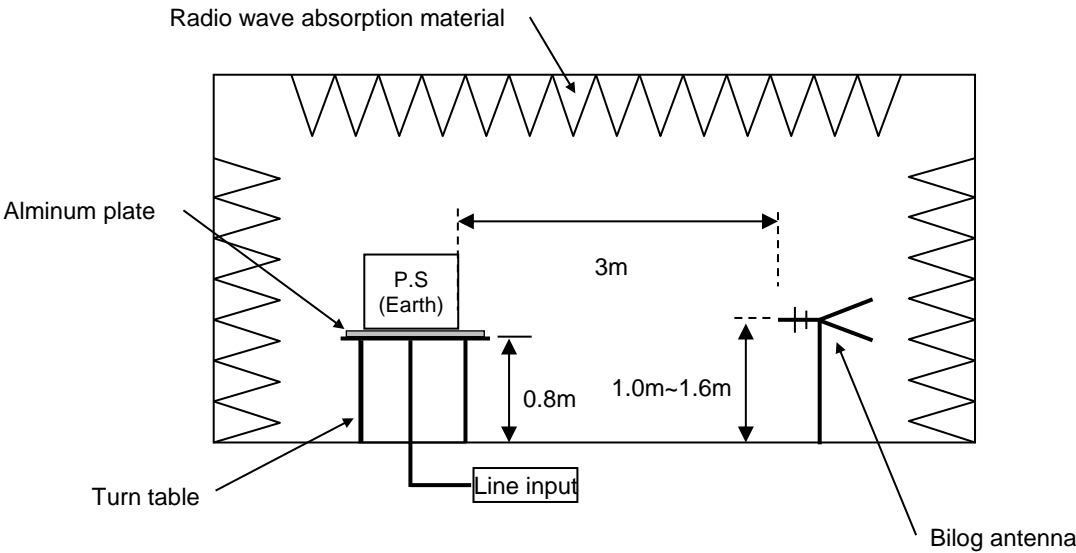

Conditions

Test : EMI
Model Name : PCA600F

O Photographs of test set-up

1.LINE CONDUCTION



2.RADIATED EMISSION

