



DATA SHEET		Date	02-Oct-25
Model	PDA100F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

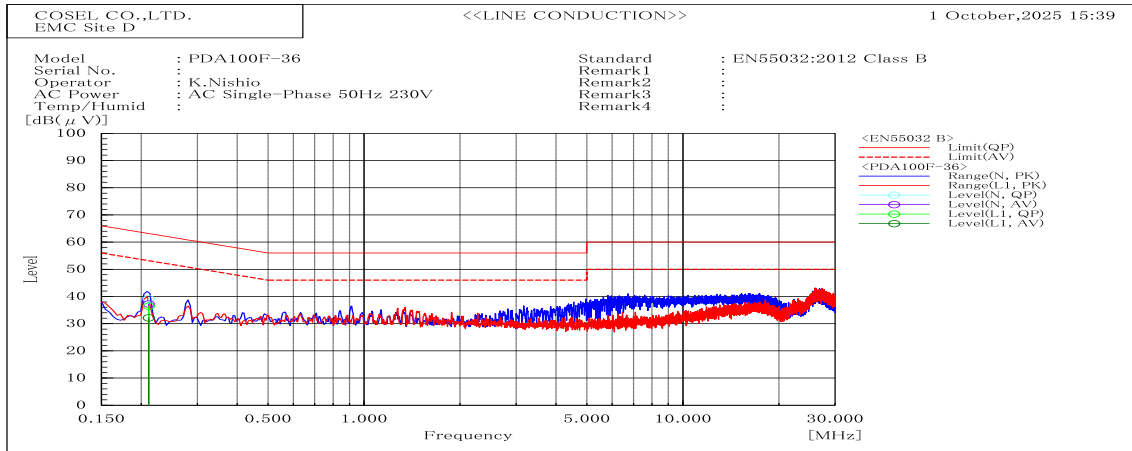


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.211	L1	36.5	32.1	63.2	53.2	26.7	21.1	Pass	
0.211	N	39.1	37.2	63.2	53.2	24.1	16	Pass	

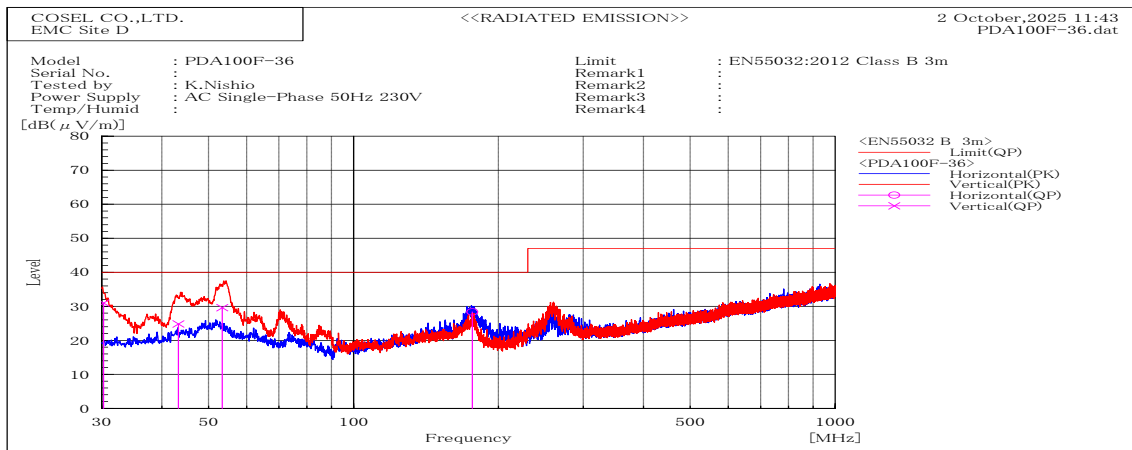


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV						
53.365	V	Stable	29.6	40	40	10.4	Pass	100	333.7	
43.293	V	Stable	24.8	40	40	15.2	Pass	103.7	58.7	
30.277	V	Stable	31	40	40	9	Pass	100.2	0	
176.381	H	Stable	28.4	40	40	11.6	Pass	198.2	201.1	

DATA SHEET		Date	02-Oct-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction


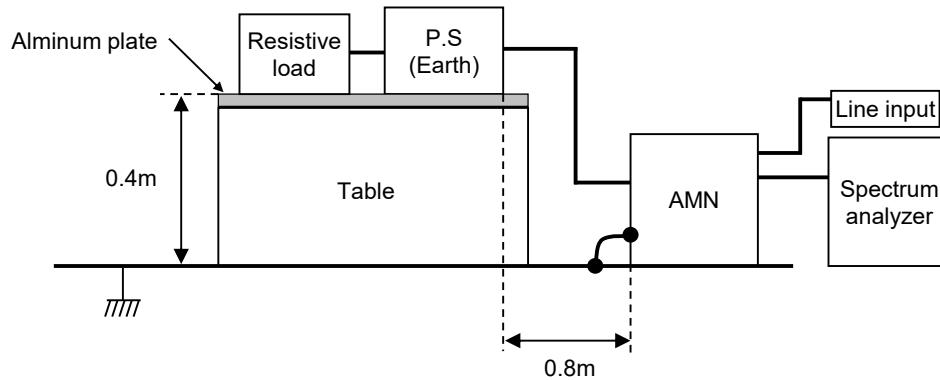


2. Radiated emission

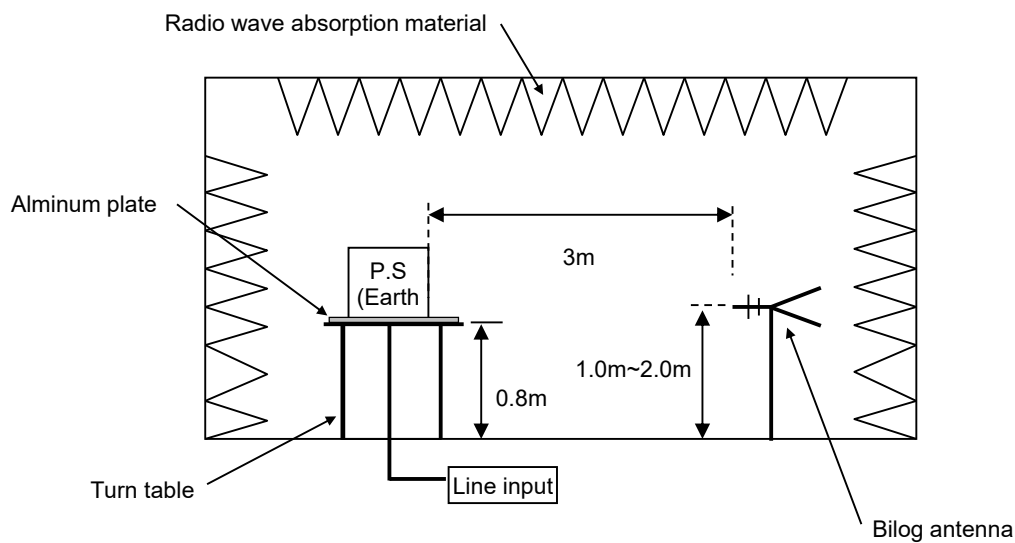

Conditions

Test : EMI
Model Name : PDA100F-36

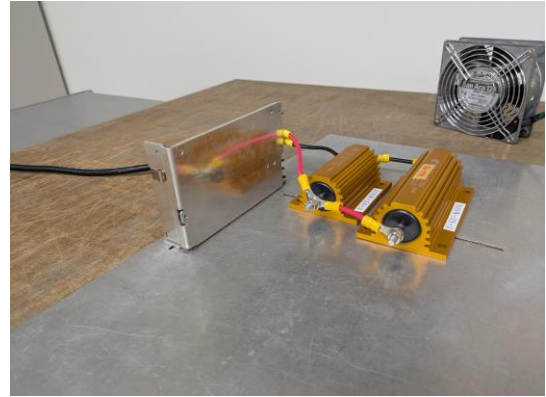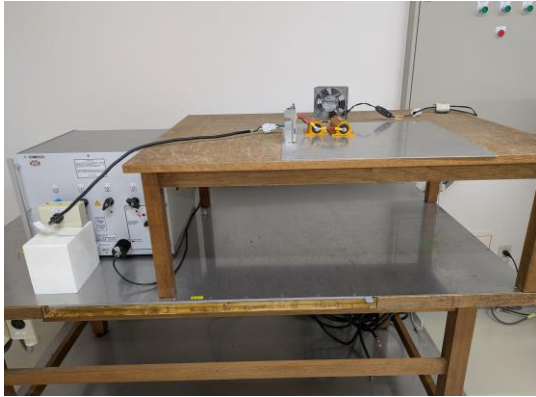1.LINE CONDUCTION**2.RADIATED EMISSION**