



DATA SHEET		Date	10-Oct-25
Model	PDA100F-3R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

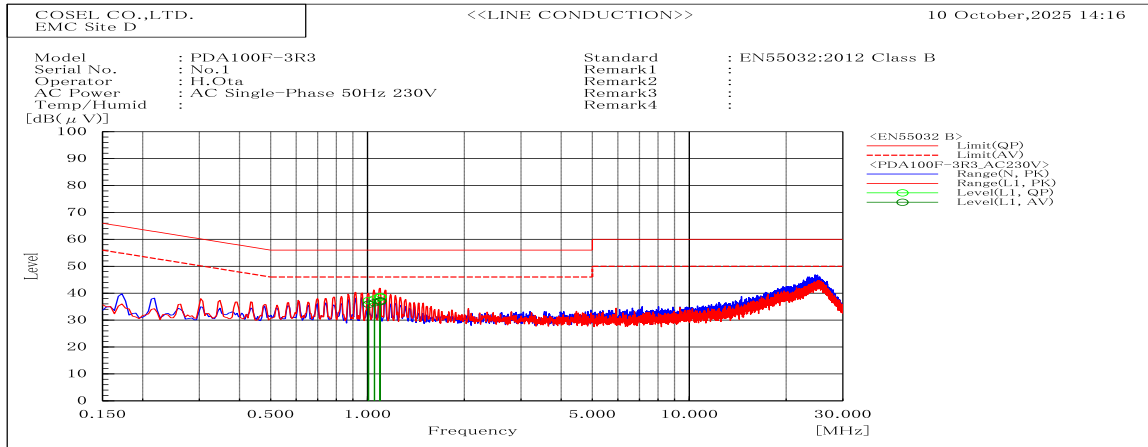


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
1.007	L1	37.3	35.9	56	46	18.7	10.1	Pass	
1.052	L1	37.8	36.5	56	46	18.2	9.5	Pass	
1.095	L1	38.6	37.1	56	46	17.4	8.9	Pass	
1.094	L1	38.7	36.8	56	46	17.3	9.2	Pass	
1.095	L1	38.6	37.1	56	46	17.4	8.9	Pass	

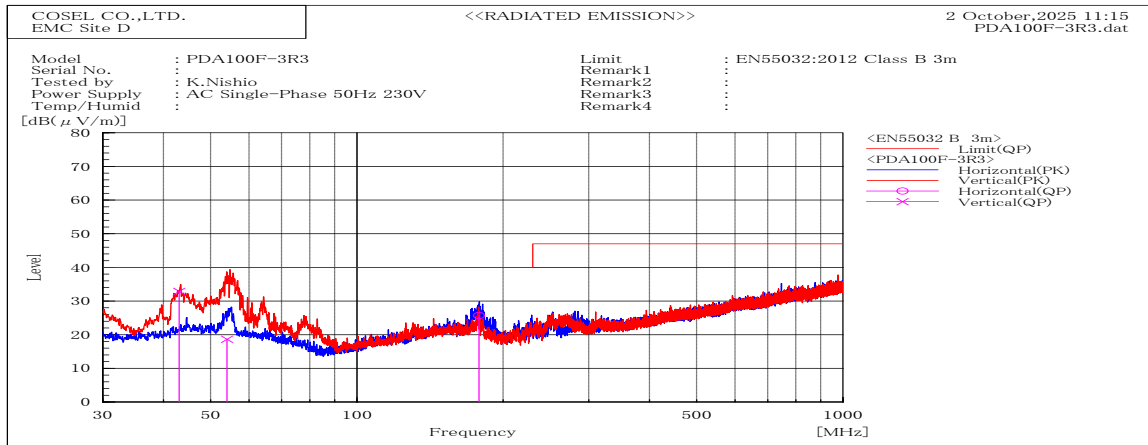


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
54.032	V	Stable	18.6	40	21.4	Pass	100.2	199	
43.082	V	Stable	32.9	40	7.1	Pass	101.9	215.8	
178.27	H	Stable	25.7	40	14.3	Pass	200	343.6	

DATA SHEET		Date	10-Oct-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

1. Line conduction


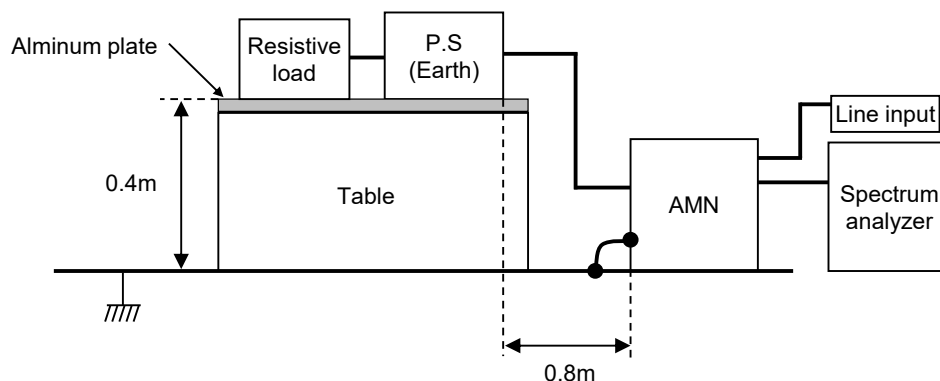


2. Radiated emission

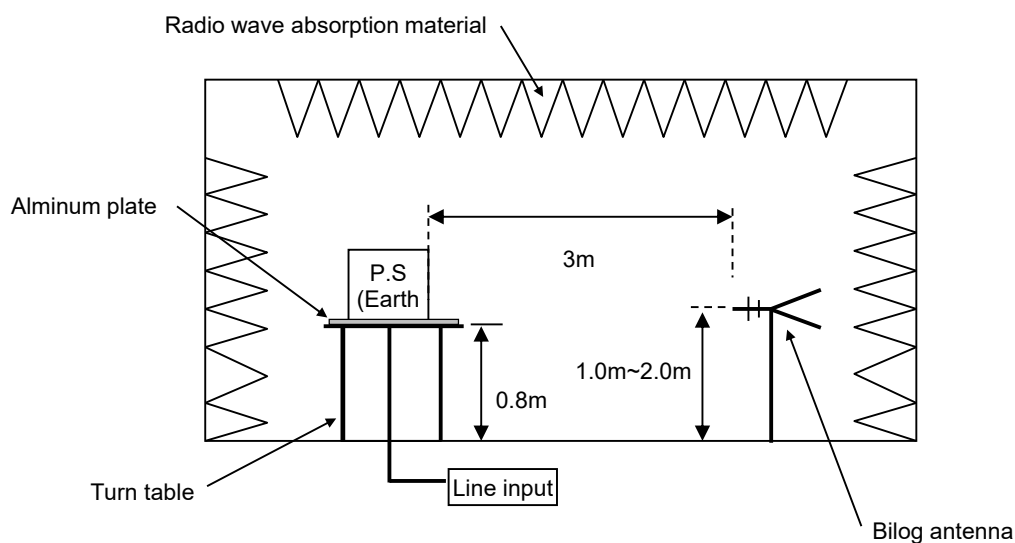

Conditions

Test : EMI
Model Name : PDA100F-3R3

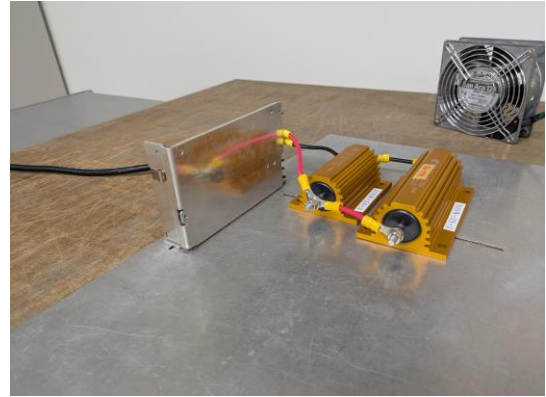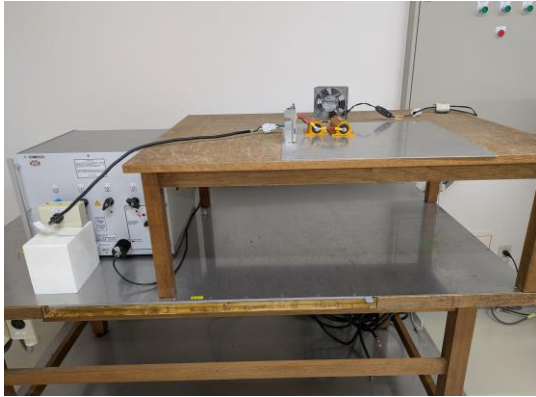1.LINE CONDUCTION**2.RADIATED EMISSION**