



DATA SHEET		Date	03-Oct-25
Model	PDA150F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

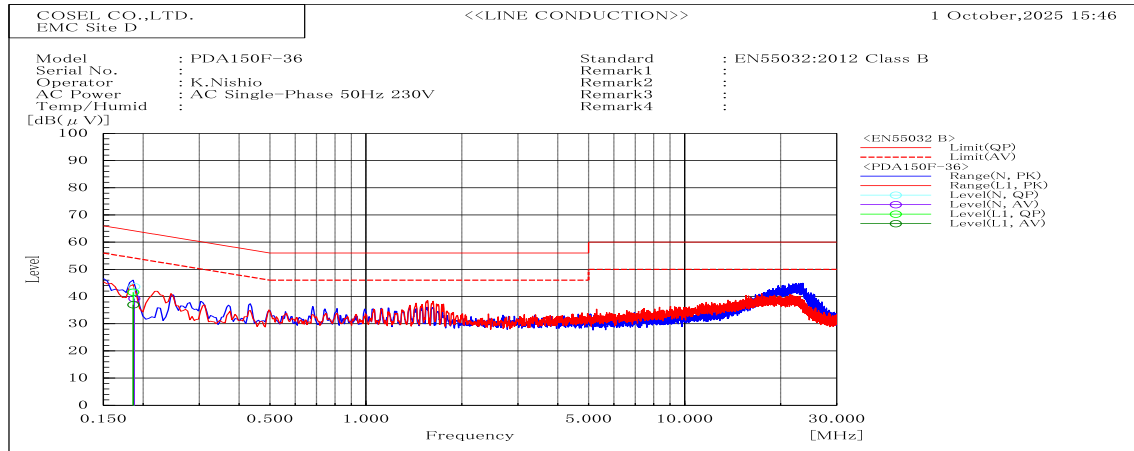


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.186	L1	41.6	37	64.2	54.2	22.6	17.2	Pass	
0.188	N	43.6	39.3	64.1	54.1	20.5	14.8	Pass	

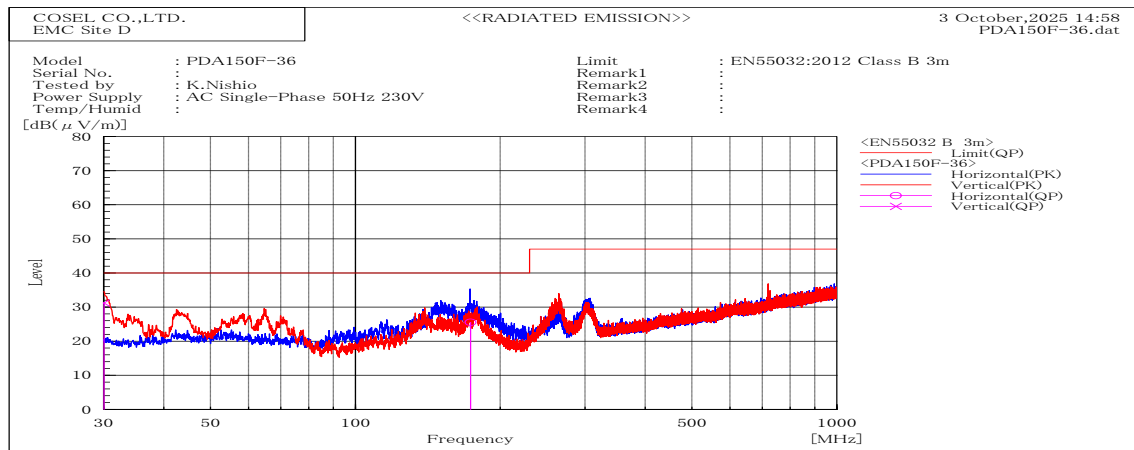


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV						
30.043	V	Stable	31.2	25.5	40	8.8	Pass	100	269.2	
173.524	H	Stable	25.5	20.5	40	14.5	Pass	198.4	310	

DATA SHEET		Date	03-Oct-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

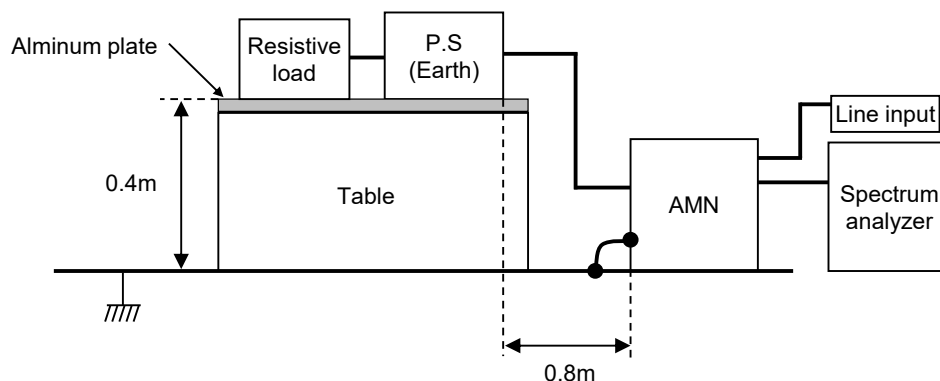



2. Radiated emission

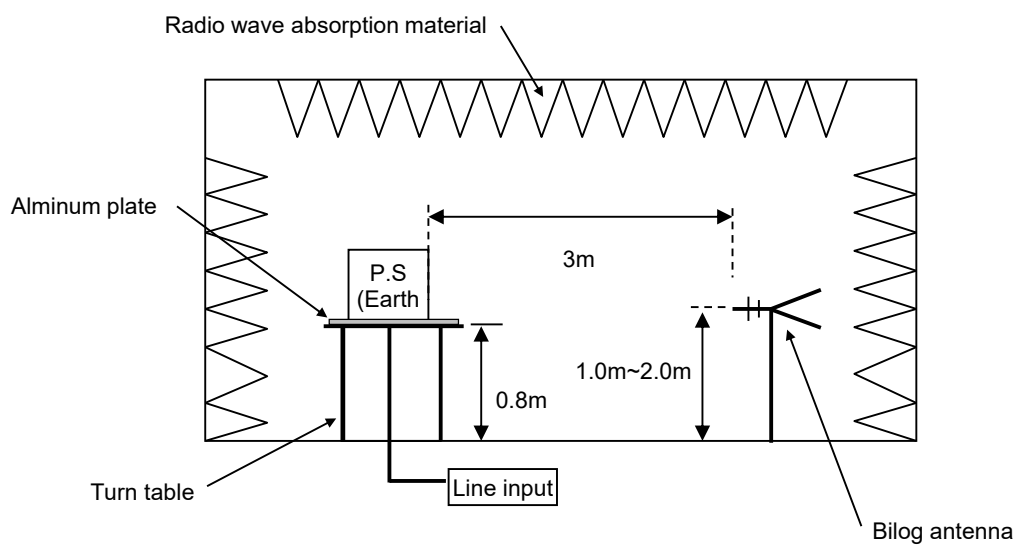

Conditions

Test : EMI
Model Name : PDA150F-36

1.LINE CONDUCTION

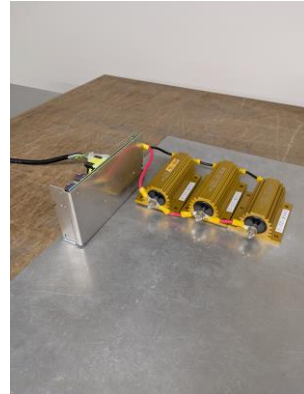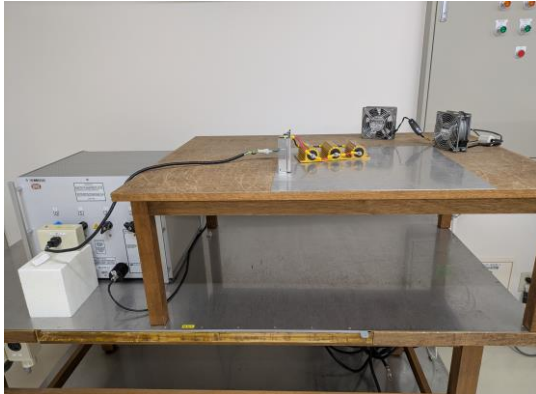

2.RADIATED EMISSION

