



DATA SHEET		Date	03-Oct-25
Model	PDA150F-3R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

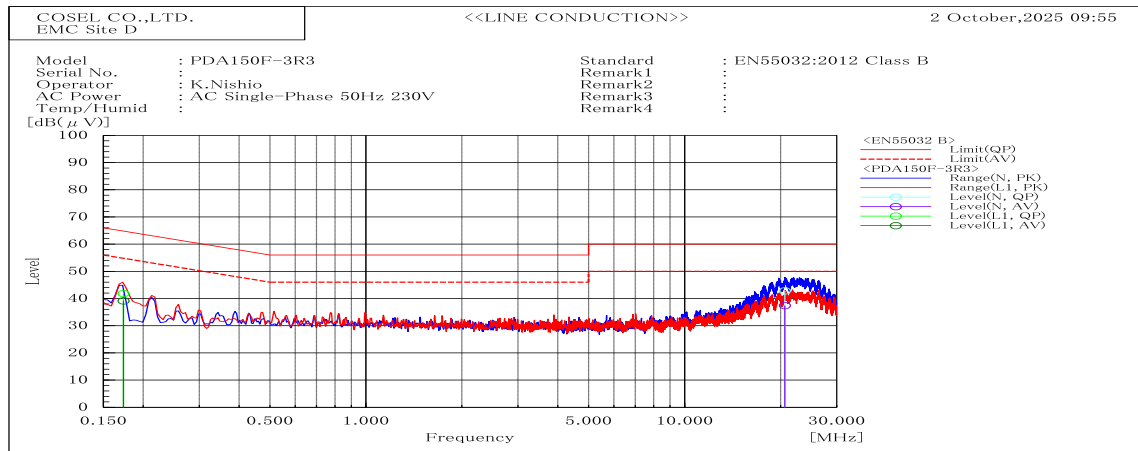


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.173	L1	41.8	39.2	64.8	54.8	23	15.6	Pass	
20.631	N	42.8	37.4	60	50	17.2	12.6	Pass	

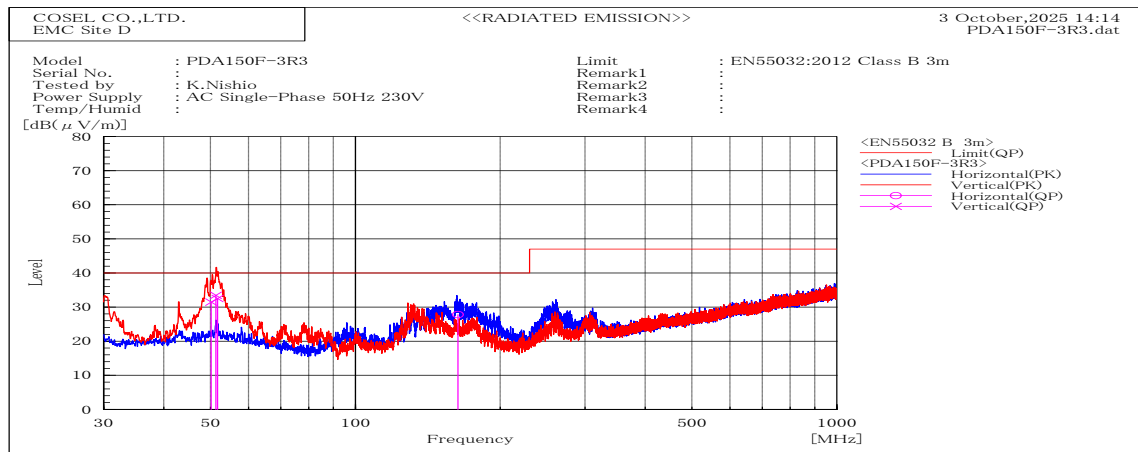


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
51.729	V	Stable	32.5	40	7.5	Pass	100	30.5	
51.329	V	Stable	33.5	40	6.5	Pass	100	160.2	
50.183	V	Stable	31.5	40	8.5	Pass	100	33.6	
163.317	H	Stable	27.8	40	12.2	Pass	185.9	81.5	

DATA SHEET		Date	03-Oct-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

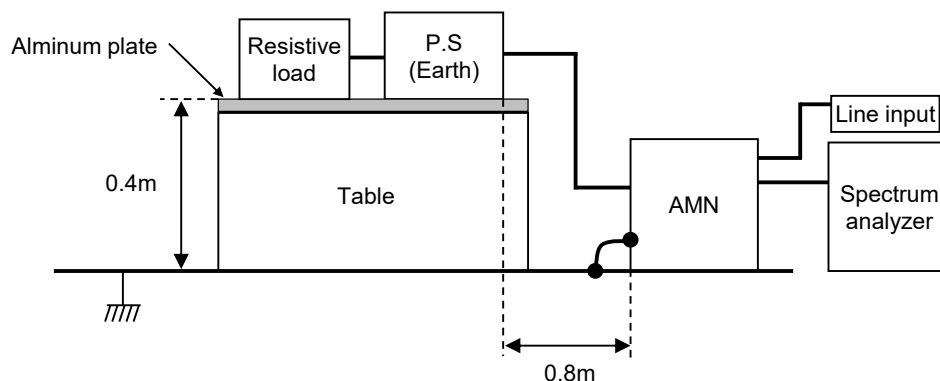



2. Radiated emission

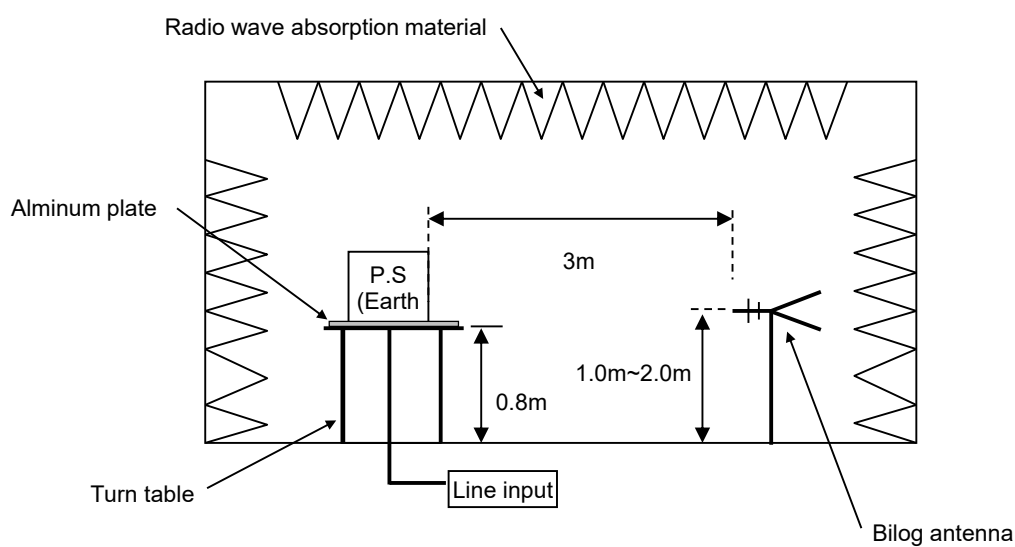

Conditions

Test : EMI
Model Name : PDA150F-3R3

1.LINE CONDUCTION

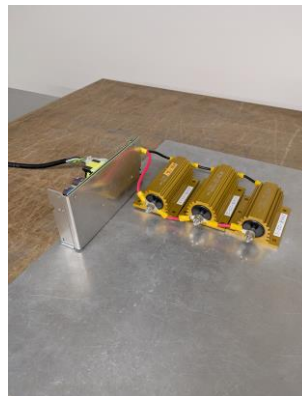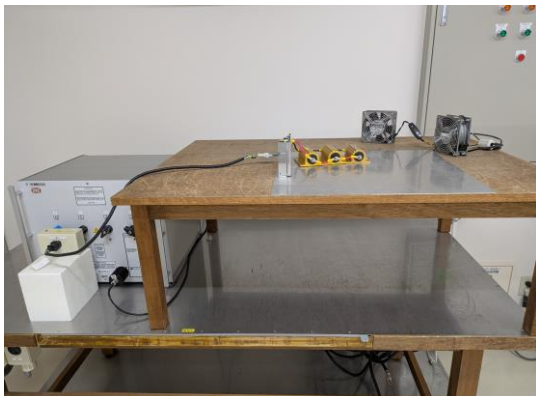

2.RADIATED EMISSION

