



DATA SHEET		Date	05-Dec-25
Model	PDA150F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

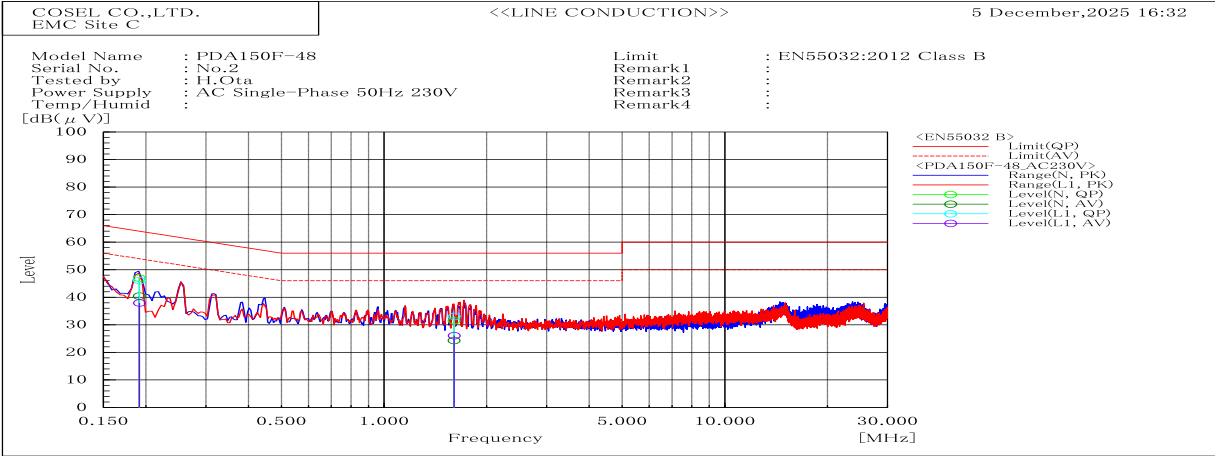


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.191	L1	46	37.9	64	54	18	16.1	Pass	
1.607	L1	33.1	26.1	56	46	22.9	19.9	Pass	
0.191	N	47	40.5	64	54	17	13.5	Pass	
1.605	N	31.5	24.3	56	46	24.5	21.7	Pass	

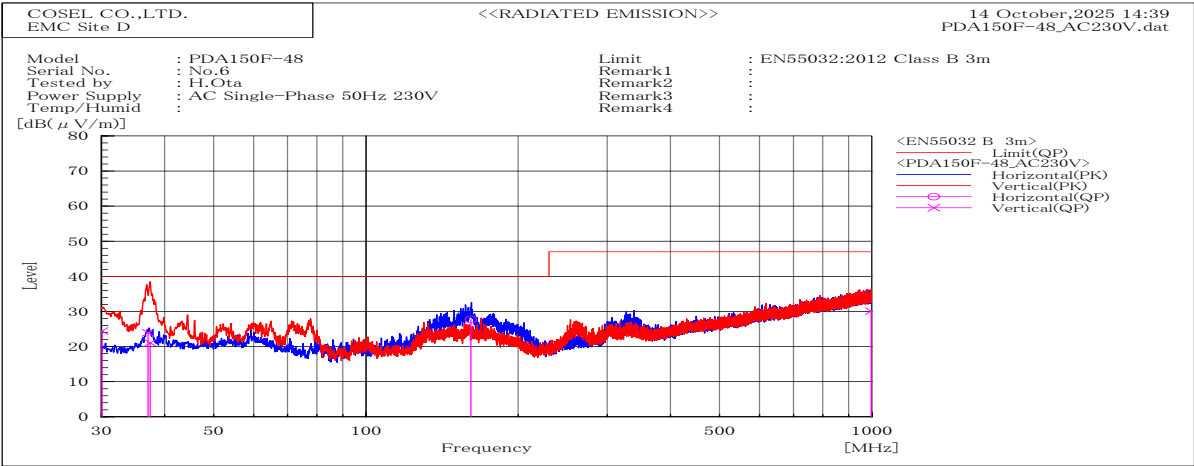


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
30.064	V	Stable	24.5	40	15.5	Pass	100	68.3	
37.445	V	Stable	21.1	40	18.9	Pass	100.2	70.8	
37.078	V	Stable	24	40	16	Pass	101.8	95	
161.21	H	Stable	27.7	40	12.3	Pass	183.7	318.5	
997.154	V	Stable	30.1	47	16.9	Pass	144.5	4.7	

DATA SHEET		Date	05-Dec-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

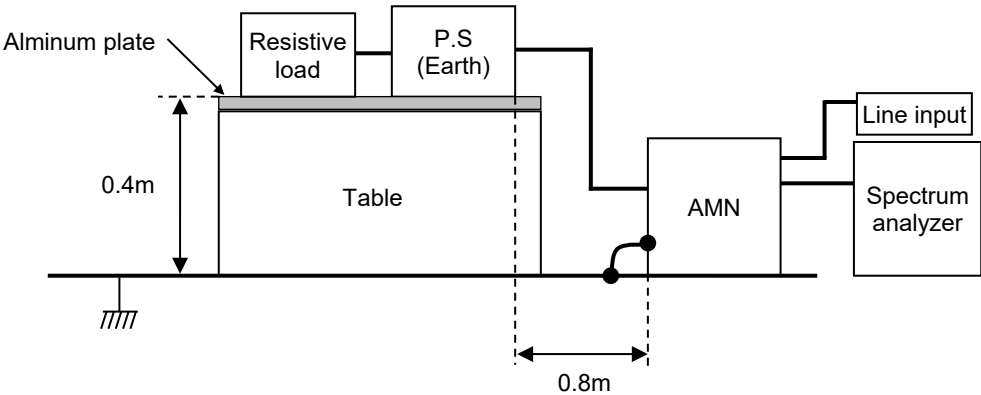



2. Radiated emission

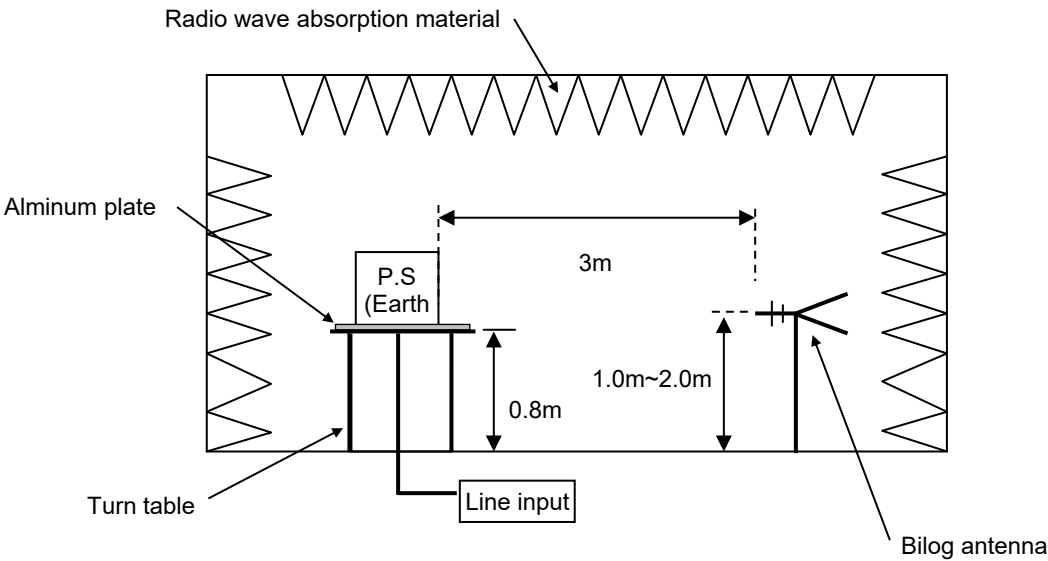

Conditions

Test : EMI
Model Name : PDA150F-48

1.LINE CONDUCTION

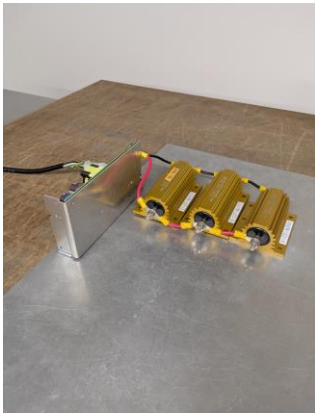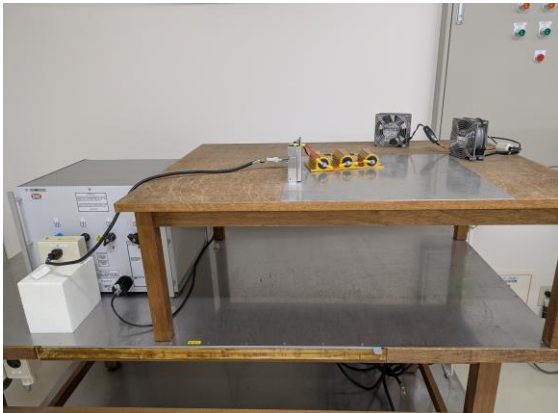

2.RADIATED EMISSION

