



DATA SHEET		Date	10-Nov-25
Model	PDA15F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

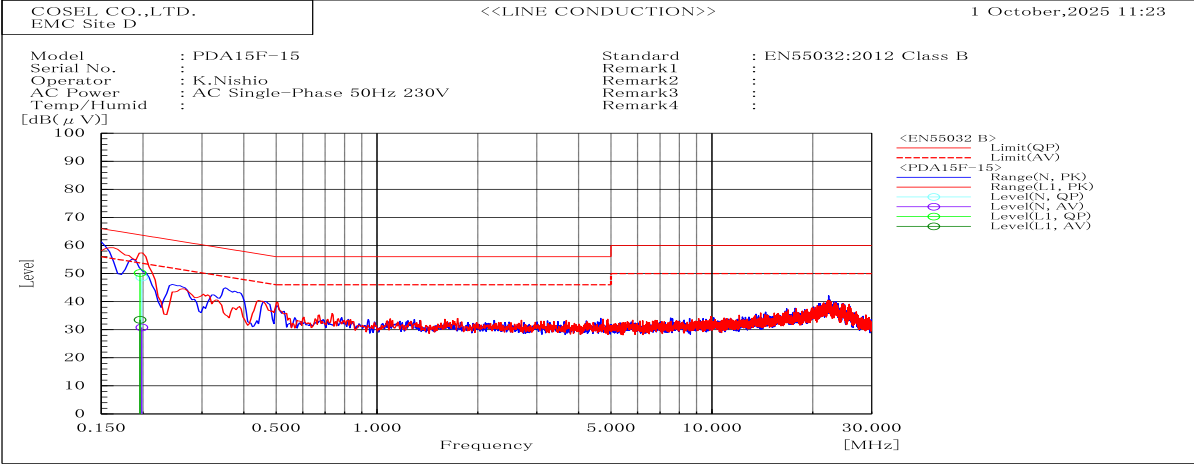


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.198	N	48.6	30.8	63.7	53.7	15.1	22.9	Pass	
0.196	L1	50.2	33.5	63.8	53.8	13.6	20.3	Pass	

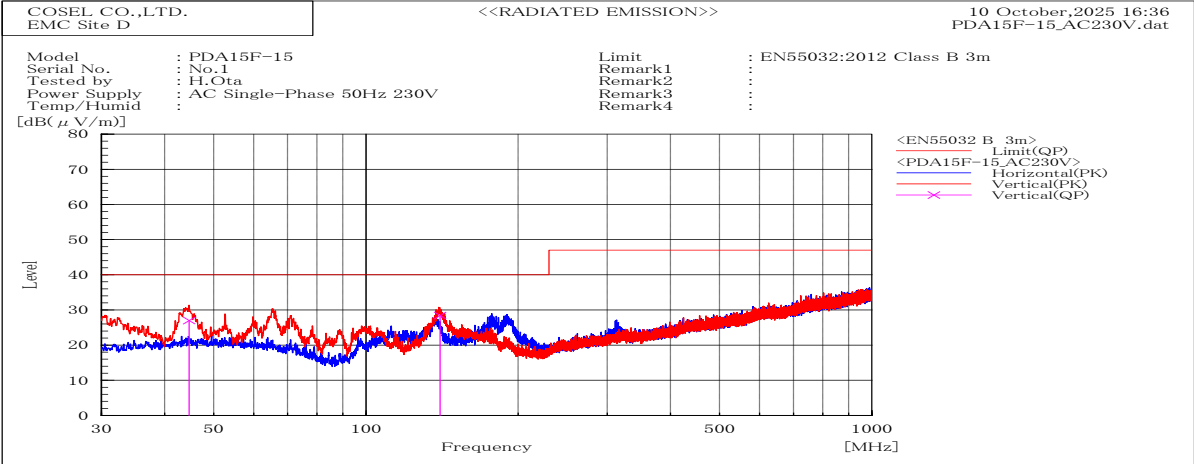


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP					
44.694	V	Stable	27	40	13	Pass	100	263.4	
140.122	V	Stable	28.4	40	11.6	Pass	100.2	116.5	

DATA SHEET		Date	10-Nov-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

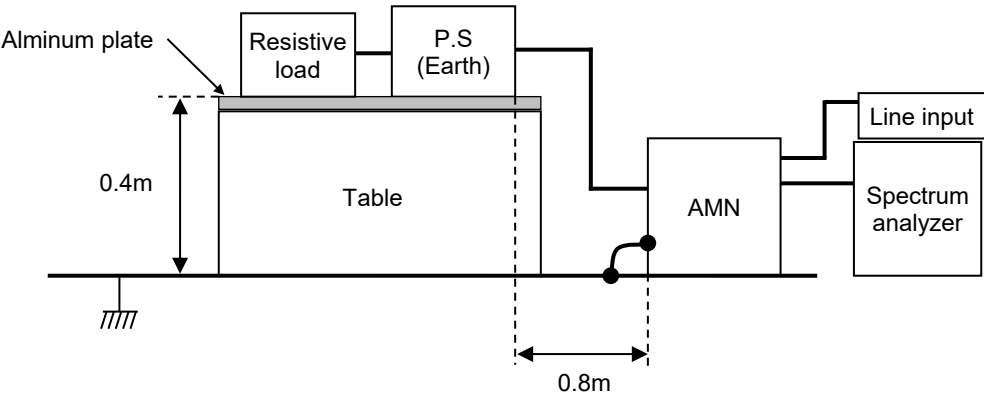

2. Radiated emission

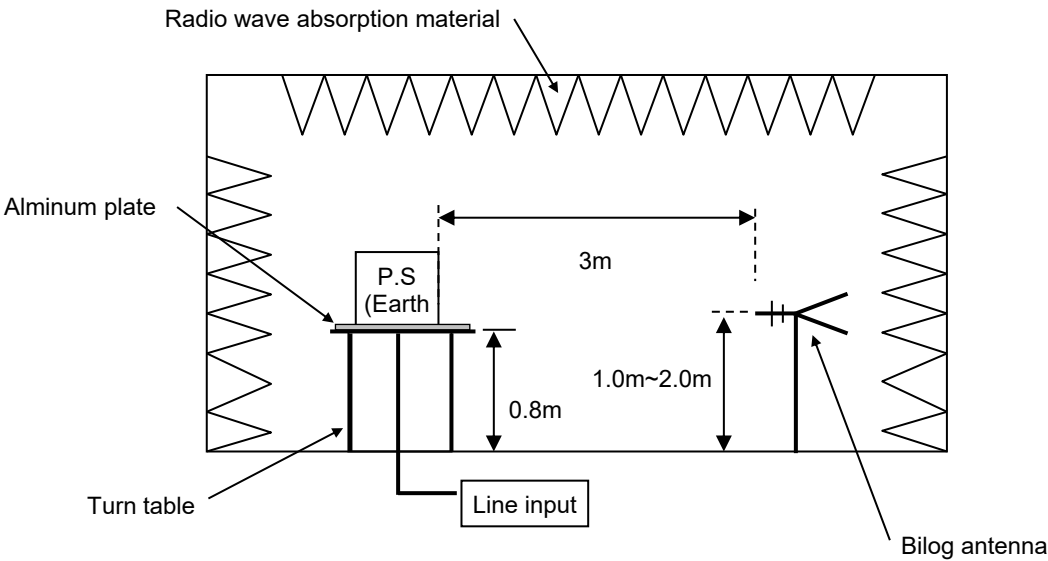

**Conditions**

Test : EMI  
Model Name : PDA15F-15

**1.LINE CONDUCTION**



**2.RADIATED EMISSION**

