



DATA SHEET		Date	02-Dec-23
Model	PDA15F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

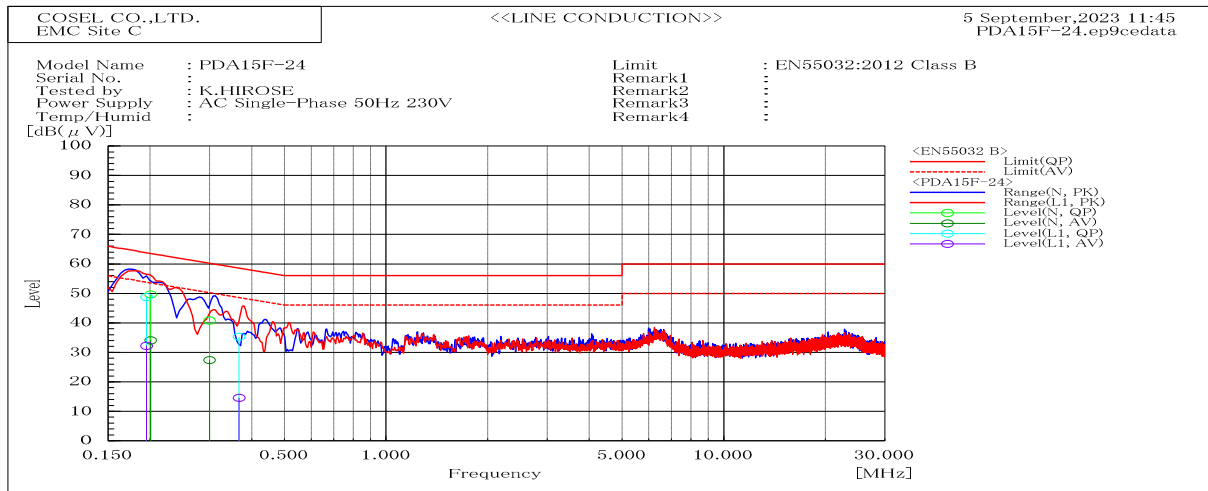


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.195	L1	48.8	32.2	63.8	53.8	15	21.6	Pass	
0.367	L1	35.4	14.6	58.6	48.6	23.2	34	Pass	
0.201	N	49.7	34.1	63.6	53.6	13.9	19.5	Pass	
0.3	N	40.8	27.4	60.2	50.2	19.4	22.8	Pass	

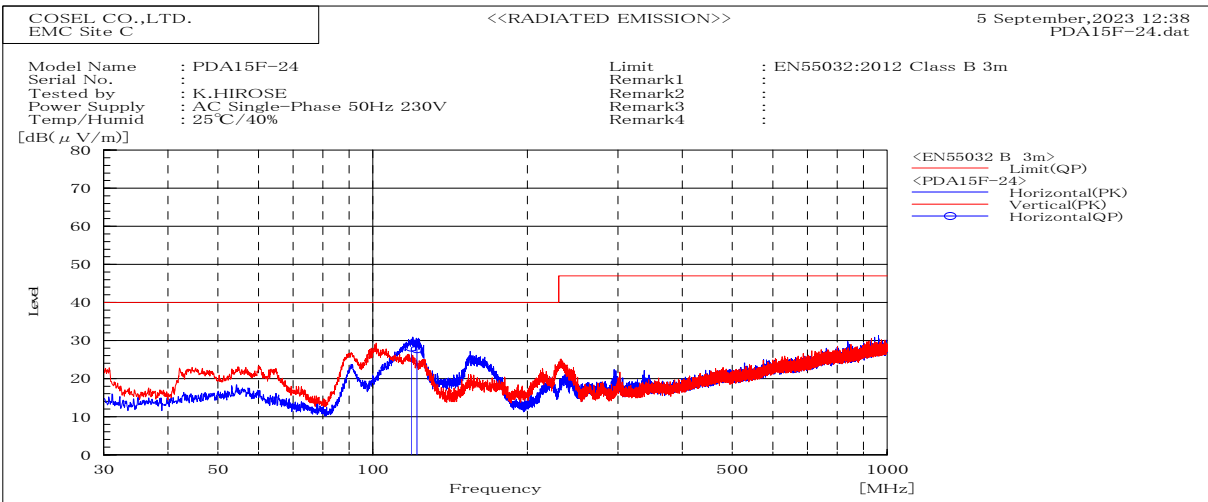


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB( $\mu$ V/m)	dB( $\mu$ V/m)	dB		cm	deg	
			QP	QP	QP				
118.82	H	Stable	28.2	40	11.8	Pass	199.7	346.2	
121.944	H	Stable	27.7	40	12.3	Pass	199.4	351.1	

DATA SHEET		Date	02-Dec-23
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.HIROSE

### 1. Line conduction

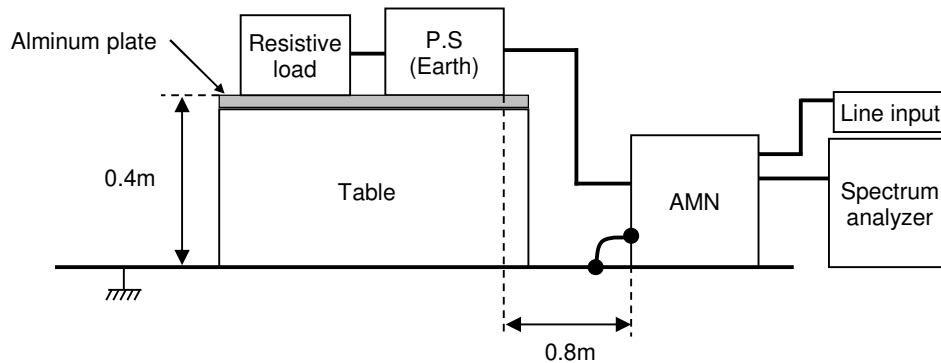


### 2. Radiated emission

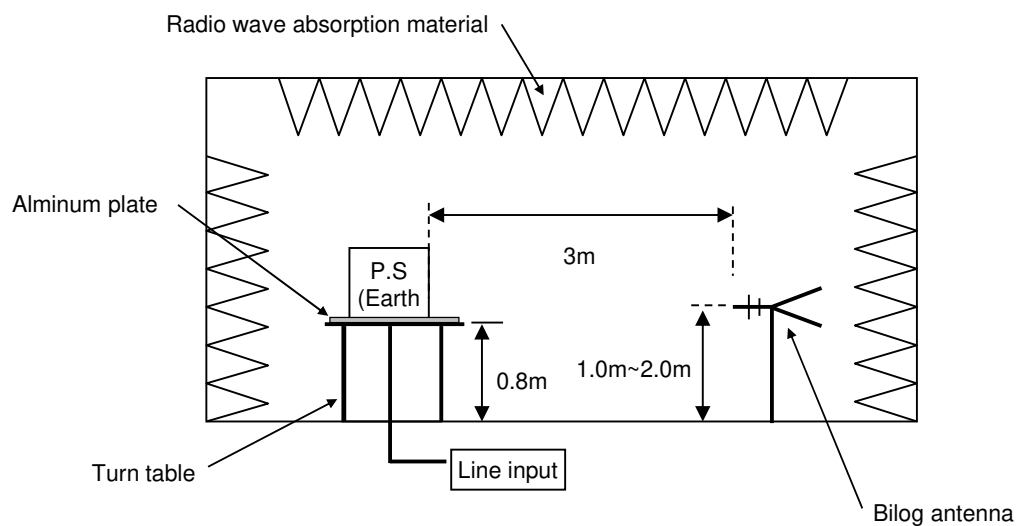

## Conditions

Test : EMI  
Model Nam : PDA15F-24

### 1.LINE CONDUCTION

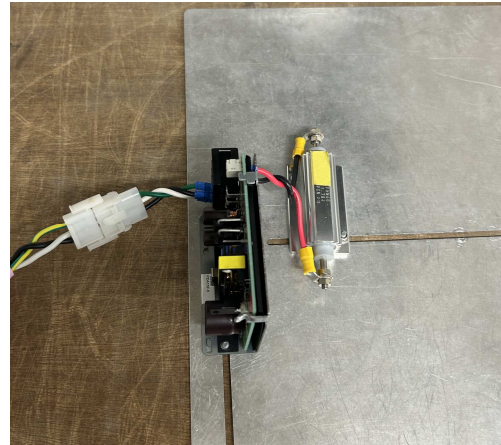

### 2.RADIATED EMISSION

