



DATA SHEET		Date	11-Nov-25
Model	PDA15F-3R3	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

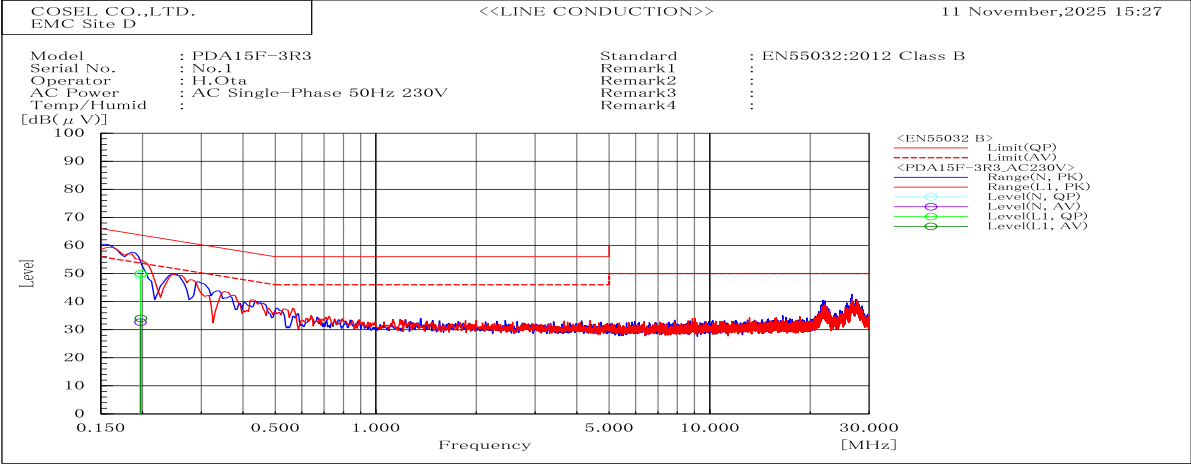


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.198	L1	50	34	63.7	53.7	13.7	19.7	Pass	
0.197	N	49.3	32.7	63.7	53.7	14.4	21	Pass	

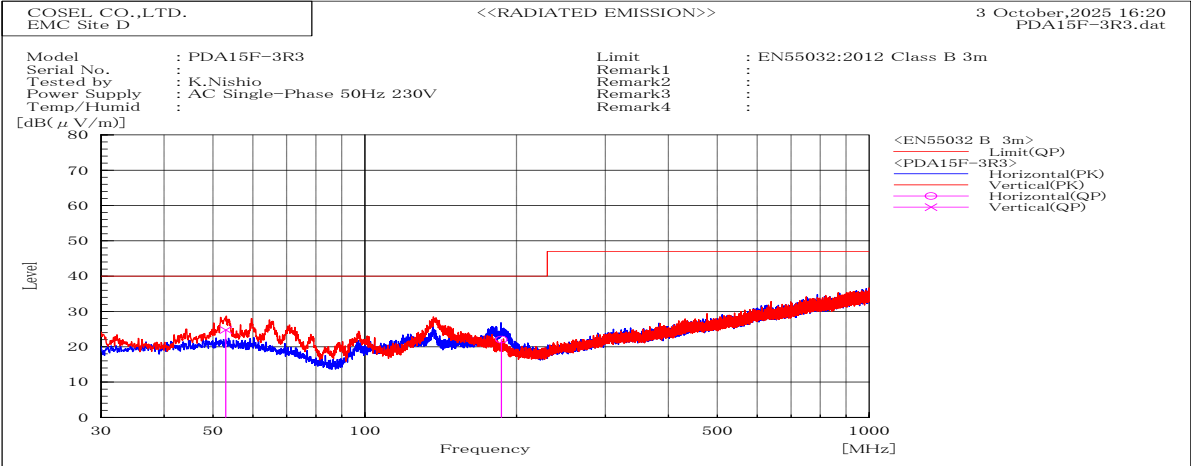


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
53.011	V	Stable	24.8	40	15.2	Pass	100.2	320	
186.607	H	Stable	22	40	18	Pass	199.7	352.7	

DATA SHEET		Date	11-Nov-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	H.Ota

1. Line conduction

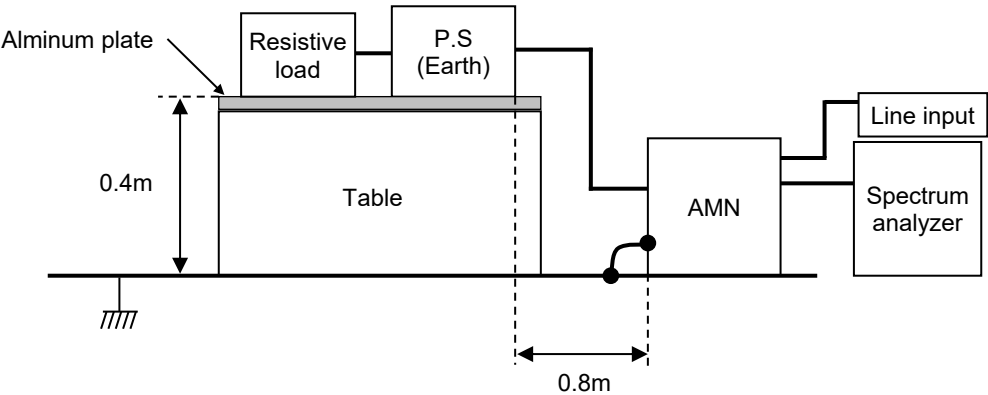

2. Radiated emission

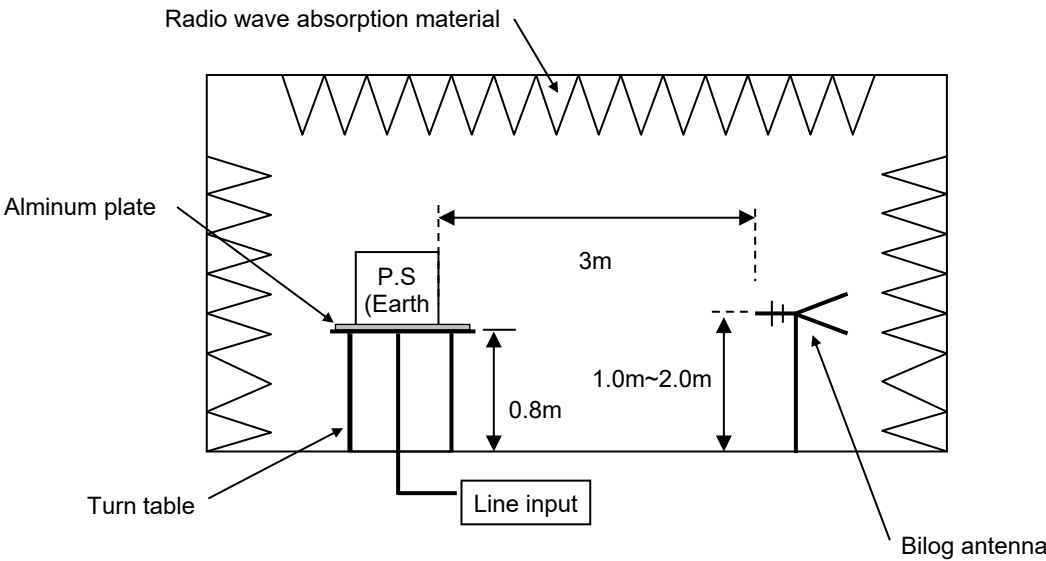

**Conditions**

Test : EMI  
Model Name : PDA15F-3R3

**1.LINE CONDUCTION**



**2.RADIATED EMISSION**

